



Gallery 50T Spot 2540

50W tunable LED profile spot 25 - 40D


Gallery 50T Spot 2540 is a 50W tunable COB LED profile spot. Aluminum housing, fan-free design. With 25° - 40° camera lens like HD zoom lens, color temperature adjustable from 2700K - 6000K. It's an idea product for art gallery, museum, shopping mall.

Key features:

- 50W WW + 50W CW constant output LED
- 2700K - 6000K adjustable
- High CRI over 92
- Die-casting aluminum housing
- HD optics, 25° - 40° zoom lens
- Smooth dimming, flicker free
- DMX built in, no external box
- DMX control of dimmer, RDM support
- Built in gobo holder
- Available in black or white color
- Track version optional


Application:

- Museum
- Theatre, church
- Shopping mall
- Art gallery
- Restaurant

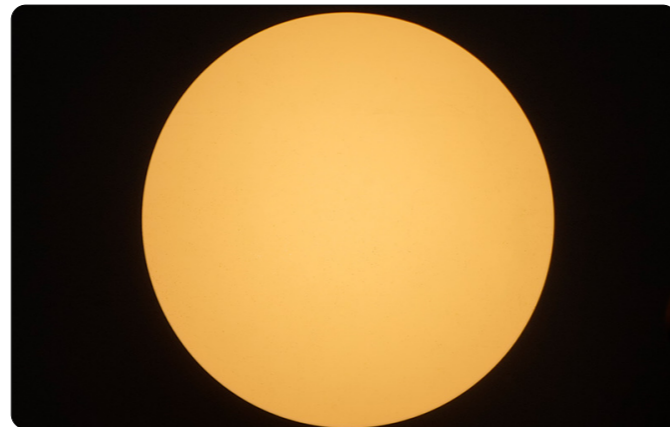


Photometric 25° - 40°

WW(lx)	8240	1360	814	469	297
CW(lx)	8150	1290	802	457	288
Full on (lx)	9700	1590	964	548	344

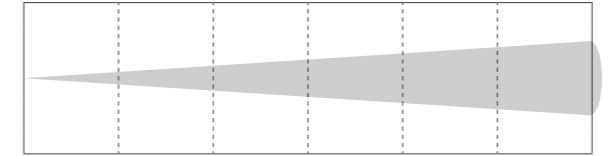


Distance(m)	1	2	3	4	5
Spot Diam(m)	0.44	0.89	1.33	1.77	2.22

WW(lx)	4580	730	449	274	161
CW(lx)	3110	629	441	269	159
Full on (lx)	3870	1210	526	322	192

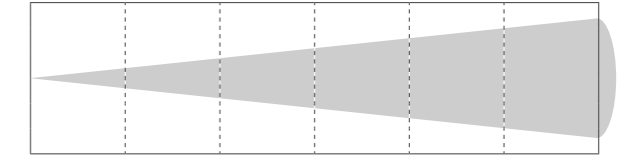

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.73	1.47	2.20	2.93	3.67

Color rendition

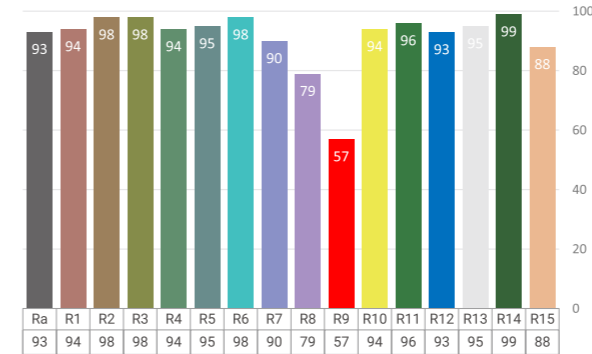

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	50W WW + 50W CW LED
Color temperature:	2700K - 6000K adjustable
Zoom range:	25° - 40° manual zoom
Color Rendition:	Avg. CRI 92
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5

Control mode:	DMX, RDM
Housing:	Color black or white, aluminum
Size:	298 x 146 x 106mm
N.W.:	1.75 kg
Accessories(incl.):	Power cable, Y split DMX cable, Safety rope
Accessories(opt.):	Clamp
Environment:	IP20