




Factory



Motorized Production Line




Glue connectors




Aging Test



Temp & Humi Test Machine




Safety test

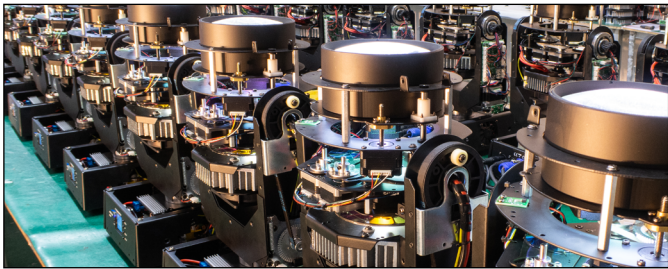

Mass production



QC Check



Transportation Test



Loading Container



3200K or 5600K



COB
20W LED



Flicker Free



92
CRI

Mini Leko 20 is a tiny 20W COB LED profile spot. Die-casting housing, fan-free design. With 19°, 26°, 36°, 50° lens optional, and portable, track mount version selectable. It's an idea product for art gallery, Museum, Shopping mall.

Key features:

- 20W COB LED, high lumen
- 3200K or 5600K color temp
- High CRI of 92
- Die-casting aluminum housing, fan-free
- 19°, 26°, 36°, 50° lens selectable
- Smooth dimming, flicker free
- Compact body, easy to set up
- Track mount version selectable
- Fresnel version selectable

Application:

- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant

Accessories:



Gel frame



Gobo holder E sized
(opt.)



Fresnel version-Piospot 20



* Track mount version available*


Mini Leko 20

WW or CW


20W LED profile spot



Photometric


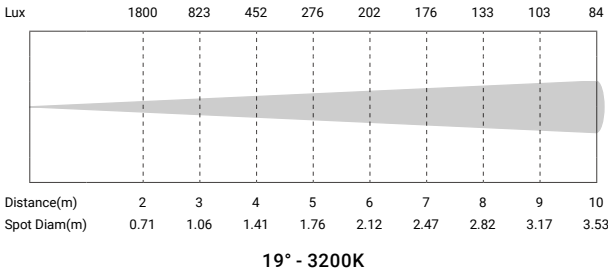


Color Rendition

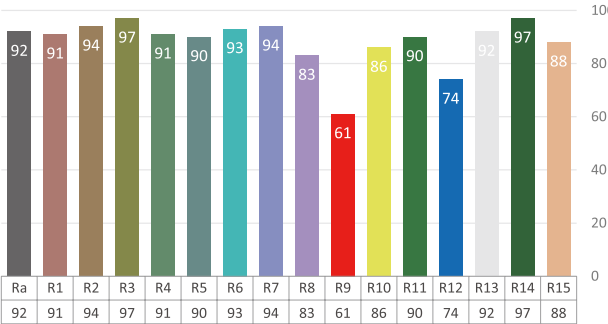

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	20W COB LED
Color temperature:	3200K or 5600K
Fixed lens:	19°, 26°, 36°, 50° optional
Color Rendition:	CRI 92
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out
Control channels	1

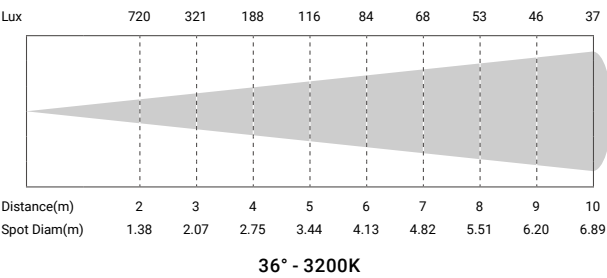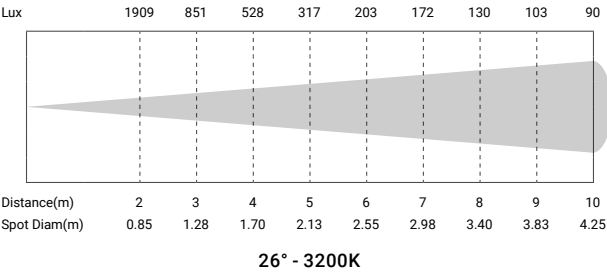

Control mode:	DMX, track mount version optional
Housing:	Color black or whtie, die-casting aluminum
Size:	343.7 x 133 x 131mm
N.W.:	1.5 kg
Accessories(incl.):	Power cable, Gel frame, Safety rope
Accessories(opt.):	Glass gobo holder E sized, Clamp
Environment:	IP20



S20T is a tiny 20W tunable COB LED profile spot. Die-casting housing, fan-free design. With 19°, 26°, 36°, 50° lens optional, and portable, track mount version selectable. It's an idea product for art gallery, Museum, Shopping mall.


Key features:

- 20W WW+20W CW constant COB LED, high lumen
- 2700K- 6000K color temp adjustable
- High CRI of 92
- Even wash of light
- Die-casting aluminum housing, fan-free
- 19°, 26°, 36°, 50° lens selectable
- Smooth dimming, flicker free
- Compact body, easy to set up

Application:

- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant


Accessories:



S20T
20W tunable LED profile spot


Photometric

WW(lx)	2840	739	357	195	141
CW(lx)	4090	1110	496	251	191
Full on(lx)	3690	994	451	237	174

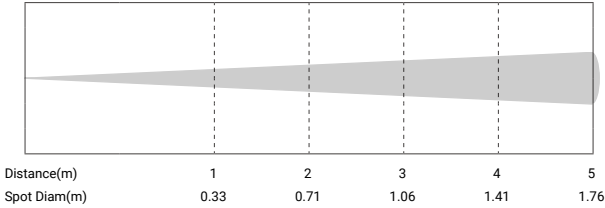


19°

WW(lx)	811	242	113	76	47
CW(lx)	1140	339	156	92	69
Full on(lx)	1030	292	143	90	60

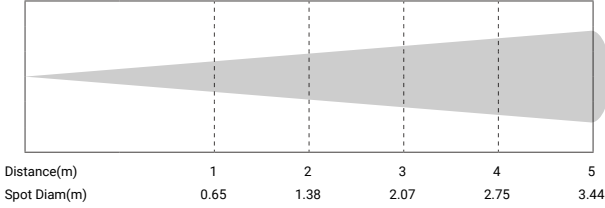


36°

WW(lx)	1936	527	253	139	107
CW(lx)	2700	764	357	189	134
Full on(lx)	2450	706	307	172	127

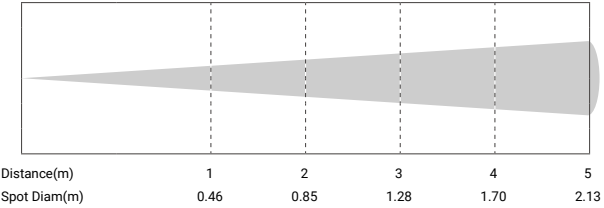

26°

WW(lx)	581	174	81	52	47
CW(lx)	843	232	116	75	53
Full on(lx)	477	211	103	65	52

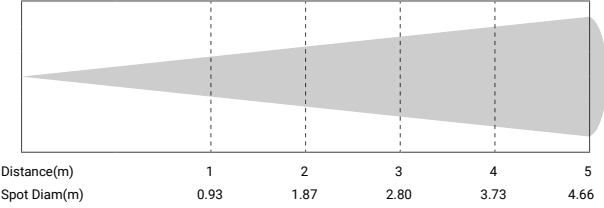

50°

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	20W WW + 20W CW
Color temperature:	2700K - 6000K adjustable
Fixed lens:	19°, 26°, 36°, 50° optional
Color Rendition:	CRI 92
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out
Control channels	1/2/3/5

Control mode:	DMX, track mount version optional
Housing:	Color black or white, die-casting aluminum
Size:	343.7 x 133 x 131mm
N.W.:	1.7 kg
Accessories(incl.):	Power cable, Gel frame, Safety rope
Accessories(opt.):	Glass gobo holder E sized, Clamp
Environment:	IP20



S20C is a tiny 25W range RGBL LED profile spot. Die-casting housing, fan-free design, innovative RGBL even and flat color mixing. With 19°, 26°, 36°, 50° lens optional, and portable, track mount version selectable. It's an idea product for art gallery, museum, shopping mall, restaurant, theme parks.



Key features:

- Each color 25W max output(100W LED source)
- RGBL even and flat color mixing
- Die-casting aluminum housing, fan-free
- 19°, 26°, 36°, 50° lens selectable
- Smooth dimming, flicker free
- Compact body, easy to set up
- Available in black or white body
- Track version optional

Application:

- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant

Accessories:

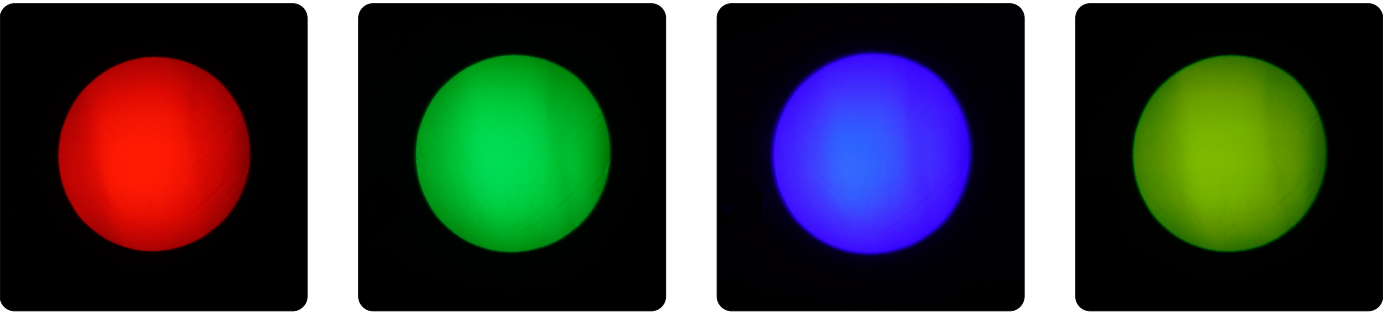

S20C
25W RGBL LED profile spot



Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	100W LED with each color 25W output
Color mixing:	RGBL
Fixed lens:	19°, 26°, 36°, 50° optional
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out
Control channels	4/6/8

Control mode:	DMX, manual(on-board)
Housing:	Color black or white, die-casting aluminum
Size:	343.7 x 133 x 131mm
N.W.:	1.7 kg
Accessories(incl.):	Power cable, Gel frame, Safety rope
Accessories(opt.):	Glass gobo holder E sized, Clamp
Environment:	IP20



3200K or 5600K



COB
40W LED



Flicker Free



92
CRI

Expo X40(previous X40) is a upgraded version of mini profile 20, brightness increased by 50%. Die-casting housing, fan-free design. With 19°, 26°, 36°, 50° lens optional, track mount version selectable. It's an idea product for art gallery, museum, shopping mall.

Key features:

- 40W COB LED, high lumen
- 3200K or 5600K color temperature
- 50% brighter than Mini Profile 20
- High CRI of 92
- Die-casting aluminum housing, fan-free
- 19°, 26°, 36°, 50° lens selectable
- Smooth dimming, flicker free
- Compact body, easy to set up
- Track mount version selectable


Application:

- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant



Accessories:



Gel frame



Gobo holder E sized
(opt.)




Expo X40

WW or CW


40W LED profile single white



Photometric

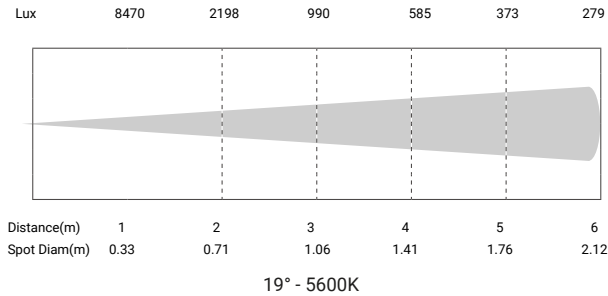


Color Rendition

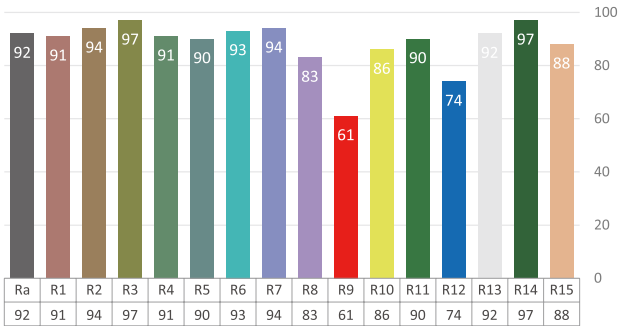

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	40W COB LED
Color temperature:	3200K or 5600K
Fixed lens:	19°, 26°, 36°, 50° optional
Color Rendition:	CRI 92
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out
Control channels	1/3

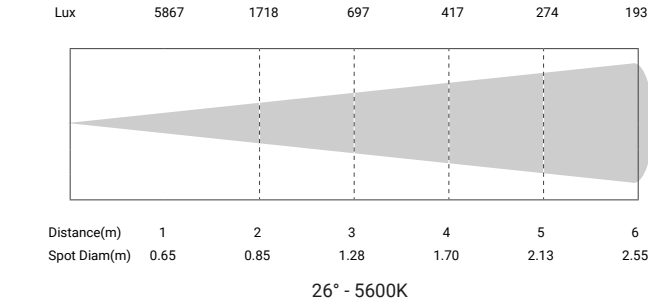

Control mode:	DMX, track mount version optional
Housing:	Color black or white, die-casting aluminum
Size:	275 x 135 x 110mm
N.W.:	1.5 kg
Accessories(incl.):	Power cable, Gel frame, Safety rope
Accessories(opt.):	Glass Gobo holder E sized, Clamp
Environment:	IP20



Expo X40T(previous X40T) is a upgraded version of S20T, with brightness increased. Die-casting housing, fan-free design. With 19°, 26°, 36°, 50° lens optional, track mount version selectable. It's an idea product for art gallery, museum, shopping mall.


Key features:

- 40W WW+40W CW constant output LED
- 2700K - 6000K adjustable
- High CRI of 92
- Die-casting aluminum housing, fan-free
- 19°, 26°, 36°, 50° lens selectable
- Smooth dimming, flicker free
- Compact body, easy to set up
- DMX control of dimmer
- RDM function available



Application:

- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant

Accessories:

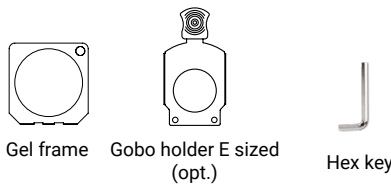


40W tunable LED profile spot



Expo X40T

Color Rendition

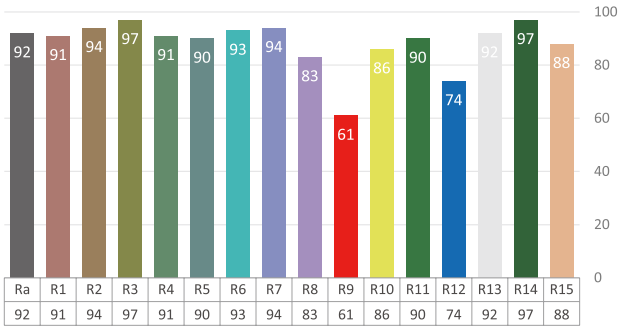

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	40W WW + 40W CW
Color temperature:	2700K - 6000K adjustable
Fixed lens:	19°, 26°, 36°, 50° optional
Color Rendition:	CRI 92
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out
Control channels	1/2/3/5
Control mode:	DMX, track mount version optional
Housing:	Color black or white, die-casting aluminum
Size:	275 x 135 x 110mm
N.W.:	1.5 kg
Accessories(incl.):	Power cable, Gel frame, Safety rope
Accessories(opt.):	Glass gobo holder E sized, Clamp
Environment:	IP20



Expo X40C is a 40W range RGBL LED profile spot. A more powerful version of S20C. Die-casting housing, fan-free design, innovative RGBL even and flat color mixing. With 19°, 26°, 36°, 50° lens optional, and portable, track mount version selectable. It's an idea product for art gallery, museum, shopping mall, restaurant, theme parks.


Key features:

- 40W LED (25W R + 25W G + 25W B + 25W L)
- RGBL even and flat color mixing
- Die-casting aluminum housing, fan-free
- 19°, 26°, 36°, 50° lens selectable
- Smooth dimming, flicker free
- Compact body, easy to set up
- Available in black or white body
- Track version optional

Application:



- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant

Accessories:



Expo X40C

40W RGBL LED profile spot



Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	40W max output(each color 25W)
Color mixing:	RGBL
Fixed lens:	19°, 26°, 36°, 50° optional
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out
Control channels	4/6/8

Control mode:	DMX, manual(on-board)
Housing:	Color black or white, die-casting aluminum
Size:	275 x 135 x 110 mm
N.W.:	1.5 kg
Accessories(incl.):	Power cable, Gel frame, Safety rope
Accessories(opt.):	Glass gobo holder E sized, Clamp
Environment:	IP20

Mini Profile 40Z

WW or CW

40W LED profile zoom

Mini Profile 40Z is a mini 40W COB LED profile spot. Die-casting housing, fan-free design. With 15 - 30° zoom lens, and portable, track mount version selectable. It's an idea product for art gallery, museum, shopping mall.

Key features:

- 40W COB LED
- 3200K or 5600K color temp
- High CRI of 92
- Die-casting aluminum housing, fan-free
- 15° - 30° zoom lens
- Smooth dimming, flicker free
- Compact body, easy to set up
- Rotary, DMX control of dimmer(portable ver.)
- RDM function available
- Track mount version selectable

Application:


- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant

Accessories:

Gel frame

Gobo holder (opt.)

Hex key





*white body version




*track mount version opt.

Photometric

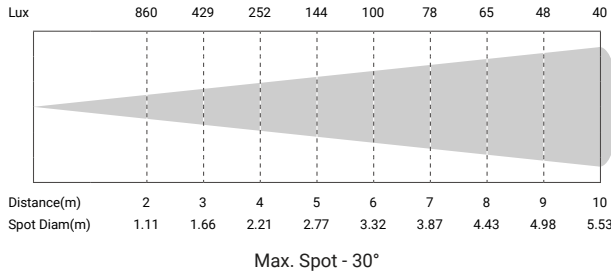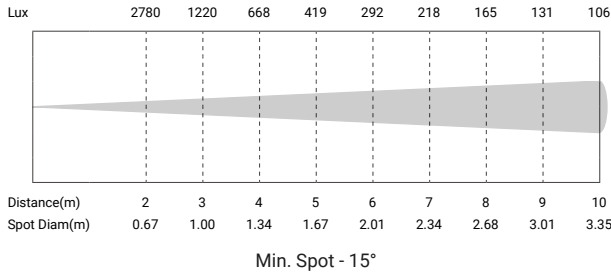

Color Rendition

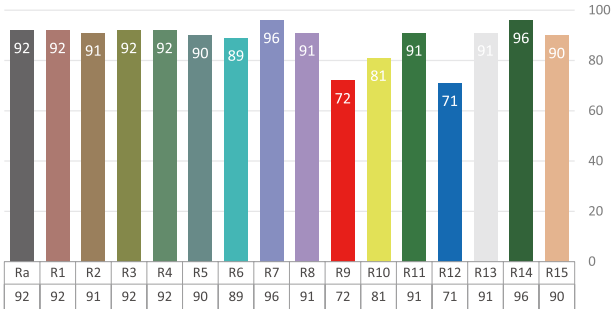

Technical Data

Power supply:	AC100 - 240V, 50/60Hz	Control mode:	Rotary, DMX, RDM
Light source:	40W COB LED	Housing:	Color black, die-casting aluminum
Color temperature:	3200K or 5600K	Size:	402 x 180 x 230mm
Zoom range:	15° - 30°	N.W.:	2.3 kg
Color Rendition:	CRI 92	G.W.:	3 kg
Power connection:	Dedicated power in	Accessories(incl.):	Power cable, gel frame
Signal connection:	3-pin XLR in & out(5-pin optional)	Accessories(opt.):	Gobo holder, Clamp, Safety rope
Control channels:	1	Environment:	IP20



Expo S40T(previous S40T) is a 40W tunable COB LED profile spot. Die-casting housing, fan-free design. With 15° - 30° zoom lens, color temperature 2700K - 6000K. It's an idea product for art gallery, museum, shopping mall.


Key features:

- 40W WW+40W CW constant output LED
- 2700K - 6000K adjustable
- High CRI of 92
- Die-casting aluminum housing, fan-free
- 15° - 30° zoom lens
- Smooth dimming, flicker free
- Compact body, easy to set up
- DMX control of dimmer
- RDM function available

Application:


- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant

Accessories:




Expo S40T

40W tunable LED profile spot




Photometric

WW(lx)	9130	2850	1280	758	500
CW(lx)	12100	3790	1690	995	650
Full on (lx)	9120	2950	1320	770	514

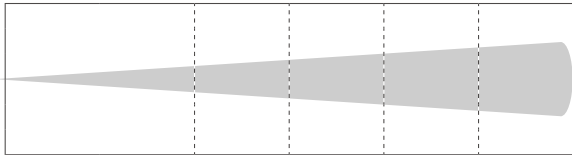


Distance(m)	1	2	3	4	5
Spot Diam(m)	0.26	0.67	1.00	1.34	1.67
Min. Spot - 15°					

WW(lx)	4240	1280	526	354	244
CW(lx)	4670	1600	744	460	288
Full on (lx)	4360	1260	553	381	245

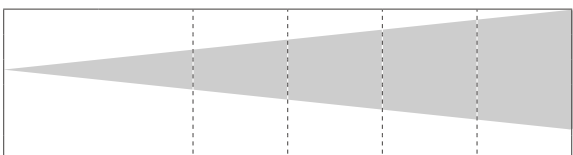

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.54	1.11	1.66	2.21	2.77
Max. Spot - 30°					


Color Rendition - 4000K

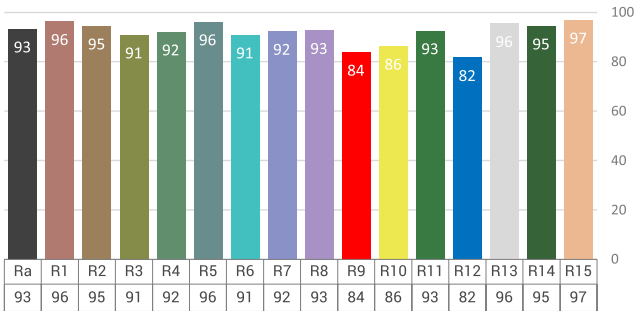

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	40W WW + 40W CW
Color temperature:	2700K - 6000K adjustable
Zoom range:	15° - 30°
Color Rendition:	Avg. CRI 92
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5

Control mode:	DMX, RDM
Housing:	Color black, die-casting aluminum
Size:	408 x 162 x 124mm
N.W.:	2.3 kg
G.W.:	3 kg
Accessories(incl.):	Power cable, Gel frame
Accessories(opt.):	Gobo holder, Clamp, Safety rope
Environment:	IP20

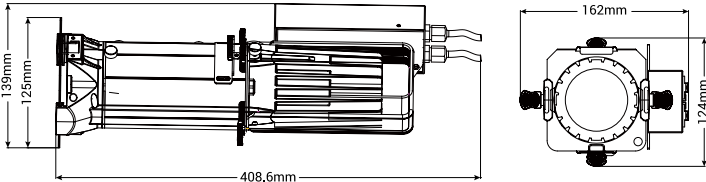



Expo S40C(S40C) is a 40W LED profile spot with RGBL color mixing. fan-free design. With 15° - 30° zoom lens, It's an idea product for art gallery, museum, shopping mall.


Key features:

- 40W LED (25W R + 25W G + 25W B + 25W L)
- RGBL even and flat color mixing
- Die-casting aluminum housing, fan-free
- 15° - 30° zoom lens
- Smooth dimming, flicker free
- Compact body, easy to set up
- DMX control of dimmer
- RDM function available
- Available in black or white body
- Track version optional


Application:

- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant

Accessories:




Expo S40C
40W RGBL profile zoom



Photometric


R (lx)	188	45	23	14	13
G (lx)	499	127	62	38	27
B (lx)	90	23	13	9	6
W (lx)	854	222	107	65	47
Full on (lx)	1700	401	193	117	83

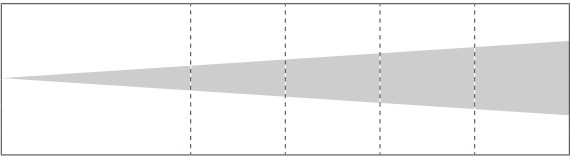

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.26	0.67	1.00	1.34	1.67

Min. Spot - 15°

R (lx)	64	21	10	6	5
G (lx)	193	58	25	15	11
B (lx)	34	11	6	5	3
W (lx)	333	102	45	26	19
Full on (lx)	623	183	77	45	35

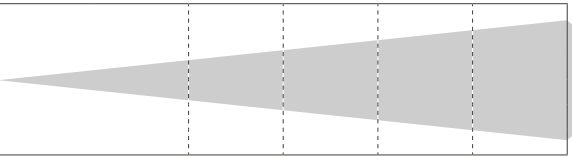


Distance(m)	1	2	3	4	5
Spot Diam(m)	0.54	1.11	1.66	2.21	2.77

Max. Spot - 30°

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	40W(25W R+25W G+25W B+25W L)
Color mixing:	RGBL
Zoom range:	15° - 30°
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out
Control channels:	4/6/8
Control mode:	DMX, RDM

Housing:	Color black, die-casting aluminum
Size:	408 x 162 x 124mm
N.W.:	2.3 kg
G.W.:	3 kg
Accessories(incl.):	Power cable, Gel frame
Accessories(opt.):	Gobo holder, Clamp, Safety rope
Environment:	IP20

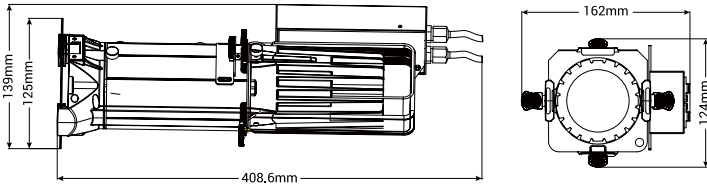



2700K - 6000K



COB
50W LED



Flicker Free

92

CRI



DMX
RDM

Gallery 50T Spot 2540

50W tunable LED profile spot 25 - 40D


Gallery 50T Spot 2540 is a 50W tunable COB LED profile spot. Aluminum housing, fan-free design. With 25° - 40° camera lens like HD zoom lens, color temperature adjustable from 2700K - 6000K. It's an idea product for art gallery, museum, shopping mall.

Key features:

- 50W WW + 50W CW constant output LED
- 2700K - 6000K adjustable
- High CRI over 92
- Die-casting aluminum housing
- HD optics, 25° - 40° zoom lens
- Smooth dimming, flicker free
- DMX built in, no external box
- DMX control of dimmer, RDM support
- Built in gobo holder
- Available in black or white color
- Track version optional


Application:

- Museum
- Theatre, church
- Shopping mall
- Art gallery
- Restaurant

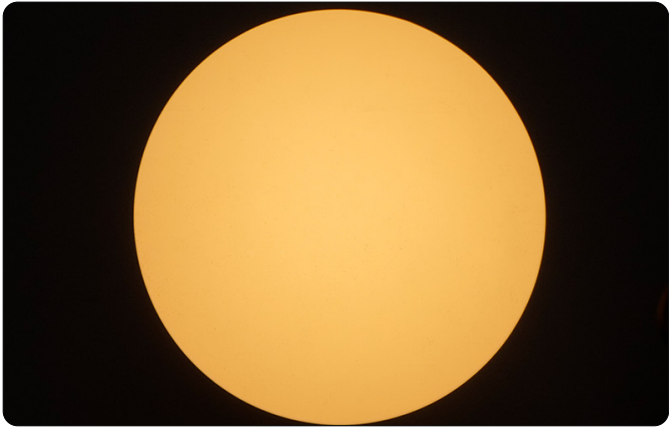


Photometric 25° - 40°

WW(lx)	8240	1360	814	469	297
CW(lx)	8150	1290	802	457	288
Full on (lx)	9700	1590	964	548	344

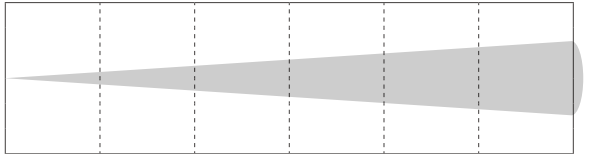

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.44	0.89	1.33	1.77	2.22


Color rendition

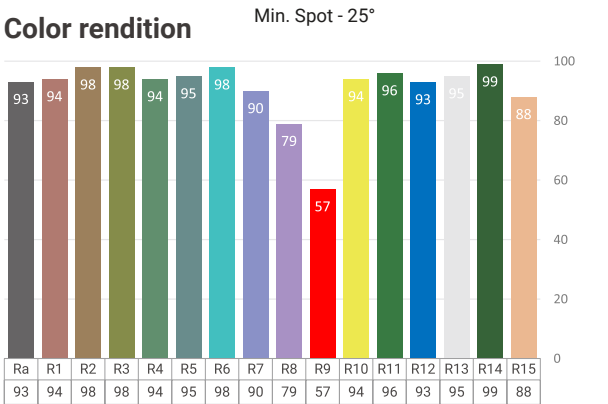

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	50W WW + 50W CW LED
Color temperature:	2700K - 6000K adjustable
Zoom range:	25° - 40° manual zoom
Color Rendition:	Avg. CRI 92
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5

WW(lx)	4580	730	449	274	161
CW(lx)	3110	629	441	269	159
Full on (lx)	3870	1210	526	322	192

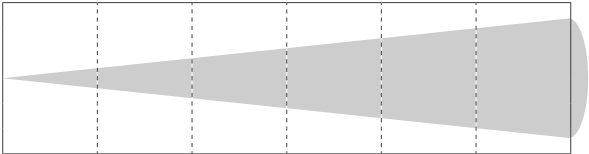

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.73	1.47	2.20	2.93	3.67

Max. Spot - 40°

Control mode:	DMX, RDM
Housing:	Color black or white, aluminum
Size:	298 x 146 x 106mm
N.W.:	1.75 kg
Accessories(incl.):	Power cable, Y split DMX cable, Safety rope
Accessories(opt.):	Clamp
Environment:	IP20



Gallery 50T Spot 5060

50W tunable LED profile spot 50 - 60D

Gallery 50T Spot 5060 is a 50W tunable COB LED profile spot with 50 - 60 degree zoom lens. Aluminum housing, fan-free design. With 50° - 60° camera lens like HD zoom lens, color temperature adjustable from 2700K - 6000K. It's an idea product for art gallery, museum, shopping mall.

Key features:

- 50W WW + 50W CW constant output LED
- 2700K - 6000K adjustable
- High CRI over 92
- Die-casting aluminum housing
- 50° - 60° zoom lens, no lens distortion
- Smooth dimming, flicker free
- DMX built in, no external box
- DMX control of dimmer, RDM support
- Built in gobo holder
- Available in black or white color
- Track version optional


Application:

- Museum
- Theatre, church
- Shopping mall
- Art gallery
- Restaurant




Photometric 50° - 60°

WW(lx)	663	178	77	46	29
CW(lx)	692	182	79	47	30
Full on (lx)	851	224	98	58	37

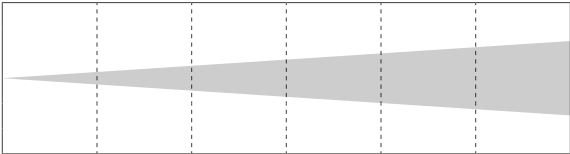

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.93	1.87	2.80	3.73	4.66


Color rendition

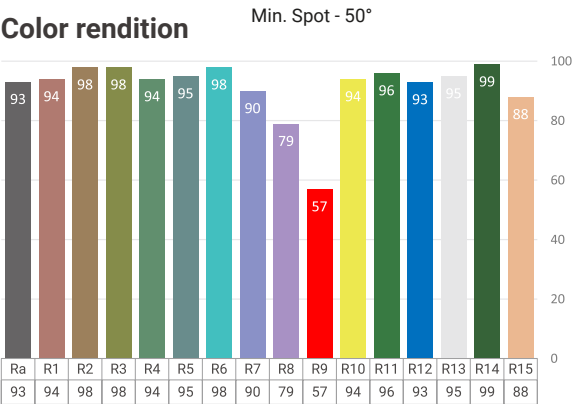

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	50W WW + 50W CW LED
Color temperature:	2700K - 6000K adjustable
Zoom range:	50° - 60° manual zoom
Color Rendition:	Avg. CRI 92
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5

WW(lx)	535	141	61	37	24
CW(lx)	534	144	62	38	24
Full on (lx)	689	180	77	46	30

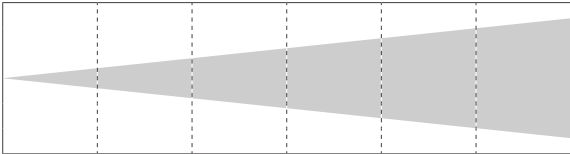

Distance(m)	1	2	3	4	5
Spot Diam(m)	1.15	2.30	3.45	4.60	5.75

Min. Spot - 50° Max. Spot - 60°

Control mode:	DMX, RDM
Housing:	Color black or white, aluminum
Size:	298 x 146 x 106mm
N.W.:	1.75 kg
Accessories(incl.):	Power cable, Y split DMX cable, Safety rope
Accessories(opt.):	Clamp
Environment:	IP20



Gallery 50C Spot 5060

40W RGBL LED profile spot 50 - 60D



Gallery 50C Spot 5060 is a 40W RGBL COB LED profile spot with 50 - 60 degree zoom lens. Aluminum housing, fan-free design. With 50° - 60° camera lens like HD zoom lens, RGBW color mixing. It's an idea product for museum, shopping mall.

Key features:

- 40W LED, 25W constant output for each LED
- RGBW color mixing
- Die-casting aluminum housing
- 50° - 60° zoom lens, no lens distortion
- Smooth dimming, flicker free
- DMX built in, no external box
- DMX control of dimmer, RDM support
- Built in gobo holder
- Available in black or white color
- Track version optional


Application:

- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant

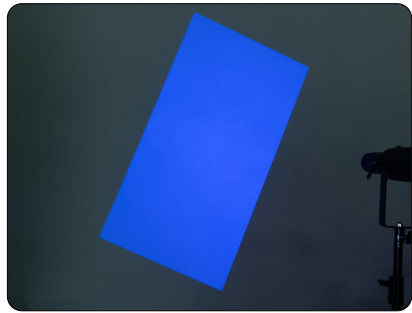


Photometric 50° - 60°

R (lx)	92	20.7	10.1	7	5.5
G (lx)	146	32.8	15.2	9	6.2
B (lx)	43.2	8.9	9.3	4	2.4
L (lx)	319	73.2	32.7	19	13.2
Full on (lx)	559	126	56	33	23.3

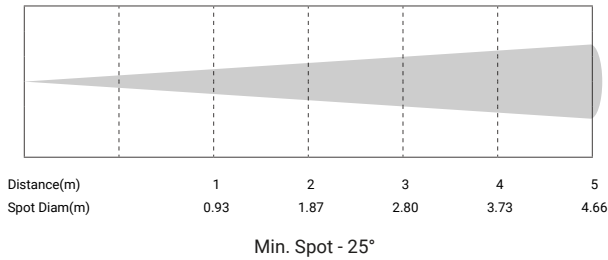


R (lx)	76.8	17	8.9	5.6	5
G (lx)	138	31.3	14.2	8.3	7
B (lx)	32	8	4.2	3	3
L (lx)	266	62	27.3	16	12
Full on (lx)	484	108	49.3	28.3	20

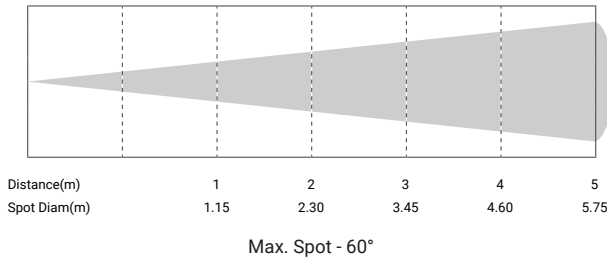

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	40W LED, 25W for each color
Zoom range:	50° - 60° manual zoom
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out
Control channels:	4/6/8
Control mode:	DMX, RDM

Housing:	Color black or white, aluminum
Size:	298 x 146 x 106mm
N.W.:	1.75 kg
Accessories(incl.):	Power cable, Y split DMX cable, Safety rope
Accessories(opt.):	Clamp
Environment:	IP20



Artisan 50T 2540 is a mini 40W COB LED profile spot light with wireless DMX function. Die-casting housing, knob control of dimmer and CCT. With 25° - 40° zoom lens, and portable, track mount version selectable. It's an idea product for art gallery, museum, shopping mall.

Key features:

- 40W COB LED
- 2700K - 6000K tunable color temperature
- 2.4G Wireless DMX, built-in Wireless Solution compatibility mode
- High CRI of 92
- Knob control of dimmer and CCT
- Die-casting aluminum housing
- 25° - 40° zoom lens
- Smooth dimming, flicker free
- Track mount version selectable

Application:

- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant


Artisan 50T 2540

40W LED profile zoom wireless DMX



Photometric


WW(lx)	8240	1360	814	469	297
CW(lx)	8150	1290	802	457	288
Full on (lx)	9700	1590	964	548	344

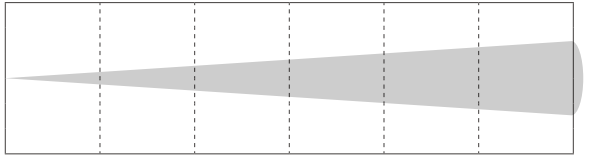

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.44	0.89	1.33	1.77	2.22

Min. Spot - 25°


Color rendition

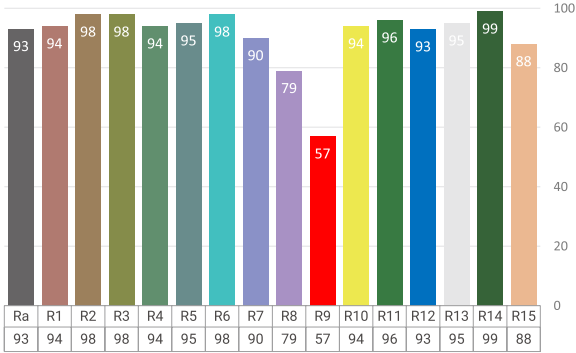

Technical Data


Power supply:	AC100 - 240V, 50/60Hz
Light source:	40W COB LED
Color temperature:	2700K - 6000K tunable
Zoom range:	25° - 40°
Color Rendition:	CRI 92
Power connection:	Dedicated power in
Signal connection:	DMX, 2.4G Wireless DMX
Control channels:	1/2/3/4

WW(lx)	4580	730	449	274	161
CW(lx)	3110	629	441	269	159
Full on (lx)	3870	1210	526	322	192

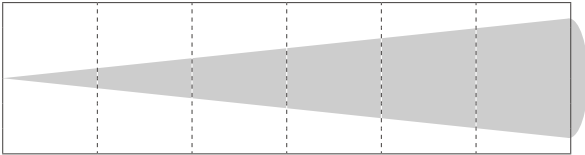


Distance(m)	1	2	3	4	5
Spot Diam(m)	0.73	1.47	2.20	2.93	3.67

Max. Spot - 40°

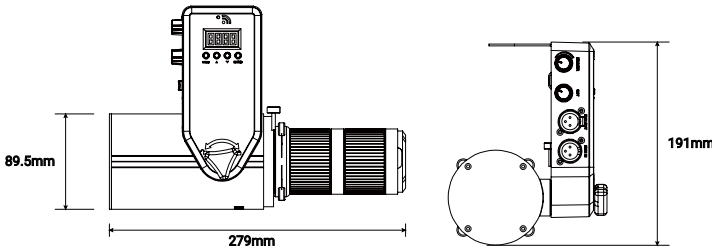

Control mode:	DMX
Housing:	Color black, die-casting aluminum
Size:	279x 90 x 191mm
N.W.:	1.85 kg
Accessories(incl.):	Power cable, Safety rope
Accessories(opt.):	Clamp
Environment:	IP20



Artisan 50T 5060 is a mini 40W COB LED profile spot light with wireless DMX function. Die-casting housing, knob control of dimmer and CCT. With 50° - 60° zoom lens, and portable, track mount version selectable. It's an idea product for art gallery, museum, shopping mall.

Key features:

- 40W COB LED
- 2700K - 6000K tunable color temperature
- 2.4G Wireless DMX, built-in Wireless Solution compatibility mode
- High CRI of 92
- Knob control of dimmer and CCT
- Die-casting aluminum housing
- 50° - 60° zoom lens
- Smooth dimming, flicker free
- Track mount version selectable

Application:


- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant

Artisan 50T 5060
40W LED profile zoom wireless DMX



Photometric


WW(lx)	663	178	77	46	29
CW(lx)	692	182	79	47	30
Full on (lx)	851	224	98	58	37

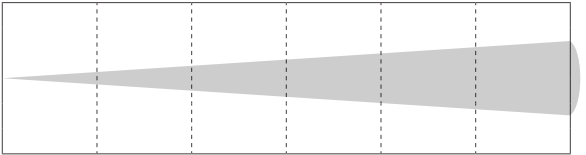

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.93	1.87	2.80	3.73	4.66

Min. Spot - 50°


Color rendition

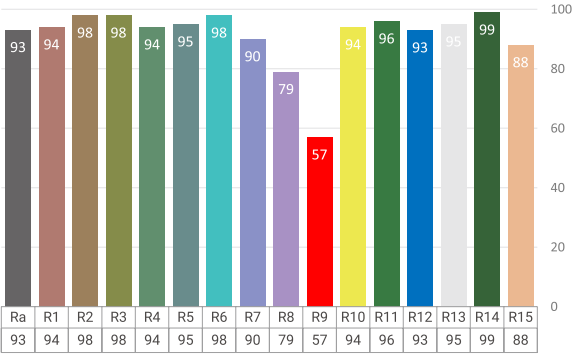

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	40W COB LED
Color temperature:	2700K - 6000K tunable
Zoom range:	50° - 60°
Color Rendition:	CRI 92
Power connection:	Dedicated power in
Signal connection:	DMX, 2.4G Wireless DMX
Control channels:	1/2/3/4

WW(lx)	535	141	61	37	24
CW(lx)	534	144	62	38	24
Full on (lx)	689	180	77	46	30

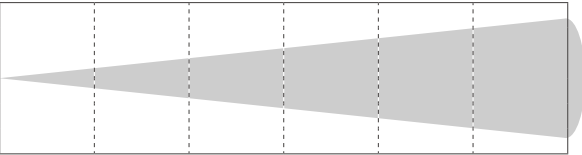

Distance(m)	1	2	3	4	5
Spot Diam(m)	1.15	2.30	3.45	4.60	5.75

Max. Spot - 60°

Control mode:	DMX
Housing:	Color black, die-casting aluminum
Size:	279x 90 x 191mm
N.W.:	1.85 kg
Accessories(incl.):	Power cable, Safety rope
Accessories(opt.):	Clamp
Environment:	IP20



Artisan 50T 2540 is a 50W RGBL source LED profile spot light with wireless DMX function. Modern design, knob control of dimmer and CCT. With 25° - 40° zoom lens, and portable, track mount version selectable. It's an idea product for art gallery, museum, shopping mall, pop-up store.

Key features:


- 50W LED, 25Watt for each color
- RGBL color mixing
- High CRI 80+
- Built in 2.4G Wireless DMX, CRMX (Lumen Radio)
- 3-pin DMX XLR in out
- Knob control of dimmer and CCT
- Die-casting aluminum body
- 25° - 40° zoom lens
- Smooth dimming, flicker free
- Track mount version selectable

Application:



- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant

Artisan 50C 2540

50W RGBL LED profile zoom wireless DMX

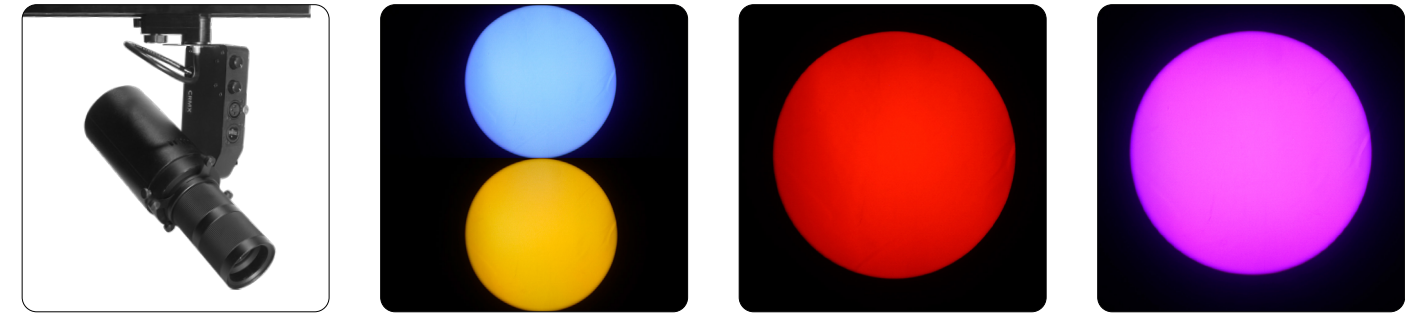


Photometric

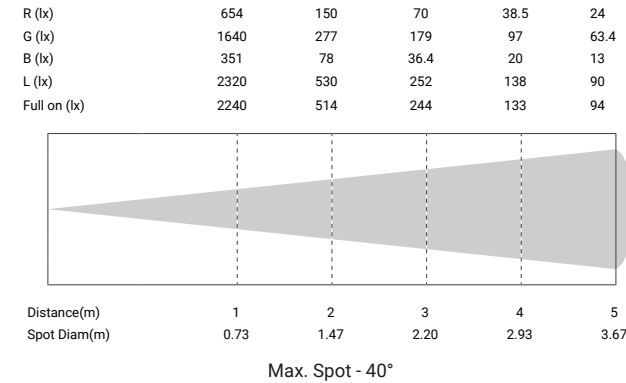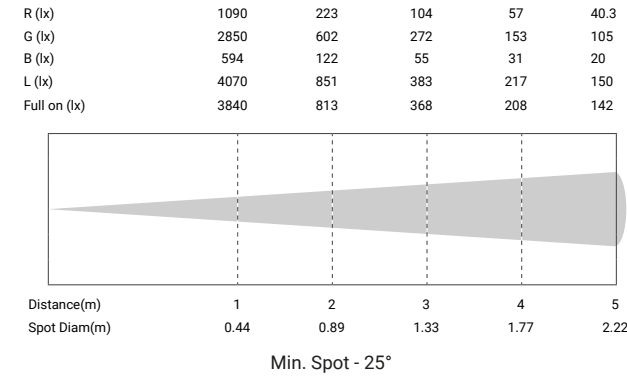

Technical Data

Power supply:	AC100 - 240V, 50/60Hz	Control mode:	DMX
Light source:	50W COB LED	Housing:	Color black, die-casting aluminum
Color temperature:	2700K - 6000K tunable	Size:	279 x 149.3 x 191mm
Zoom range:	25° - 40°	N.W.:	1.85 kg
Color Rendition:	CRI 80+	Accessories(incl.):	Power cable, Safety rope
Power connection:	Dedicated power in	Accessories(opt.):	Clamp
Signal connection:	DMX, 2.4G Wireless DMX	Environment:	IP20
Control channels:	4/6/8		

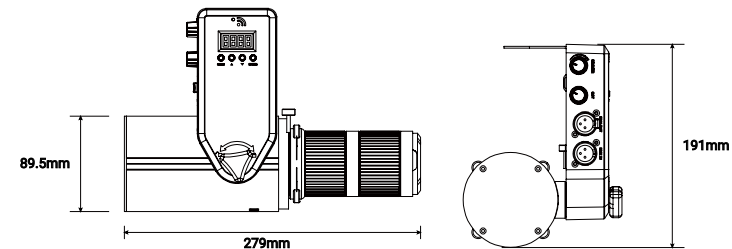



Artisan 50T 2540 is a 50W RGBL source LED profile spot light with wireless DMX function. Modern design, knob control of dimmer and CCT. With 50° - 60° zoom lens, and portable, track mount version selectable. It's an idea product for art gallery, museum, shopping mall, pop-up store.

Key features:


- 50W LED, 25Watt for each color
- RGBL color mixing
- High CRI 80+
- Built in 2.4G Wireless DMX, CRMX (Lumen Radio)
- 3-pin DMX XLR in out
- Knob control of dimmer and CCT
- Die-casting aluminum body
- 50° - 60° zoom lens
- Smooth dimming, flicker free
- Track mount version selectable

Application:



- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant

Artisan 50C 5060

50W RGBL LED profile zoom wireless DMX

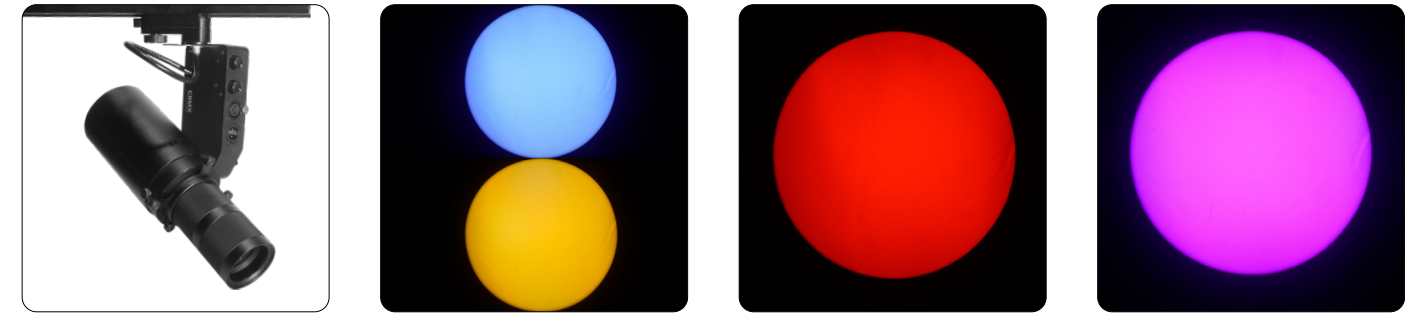


Photometric

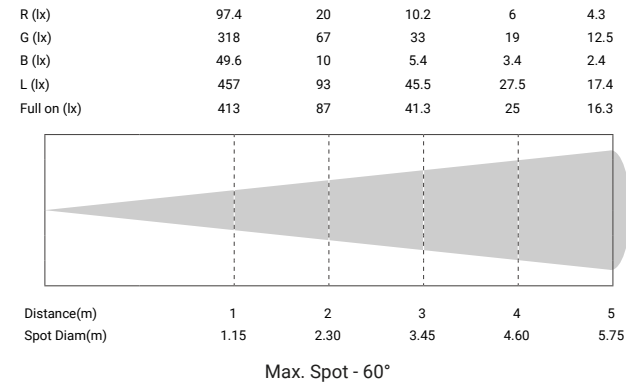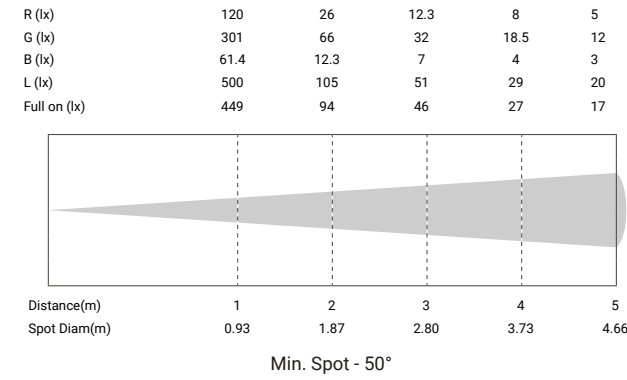

Technical Data

Power supply:	AC100 - 240V, 50/60Hz	Control mode:	DMX
Light source:	50W COB LED	Housing:	Color black, die-casting aluminum
Color temperature:	2700K - 6000K tunable	Size:	279 x 149.3 x 191mm
Zoom range:	25° - 40°	N.W.:	1.85 kg
Color Rendition:	CRI 80+	Accessories(incl.):	Power cable, Safety rope
Power connection:	Dedicated power in	Accessories(opt.):	Clamp
Signal connection:	DMX, 2.4G Wireless DMX	Environment:	IP20
Control channels:	4/6/8		

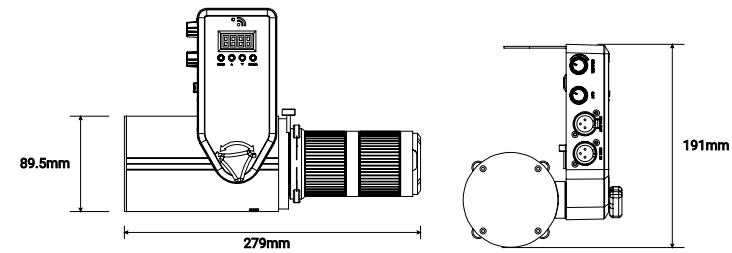


92

CRI

Panto Leko 60T (previous Panto Leko 60) is a 60W tunable COB LED profile spot. Die-casting housing, fan-free design. With 15° - 30° and 25° - 50° zoom lens optional, color temperature adjustable from 2700K - 6000K. It's an idea product for art gallery, museum, shopping mall.

Key features:

- 60W WW + 60W CW constant output LED
- 2700K - 6000K adjustable
- High CRI over 92
- Die-casting aluminum housing, fan-free
- HD optics, 15° - 30° and 25° - 50° zoom lens optional
- Smooth dimming, flicker free
- Compact body, easy to set up
- DMX control of dimmer, RDM support
- IP65, indoor or outdoor use
- Support E-sized gobo holder

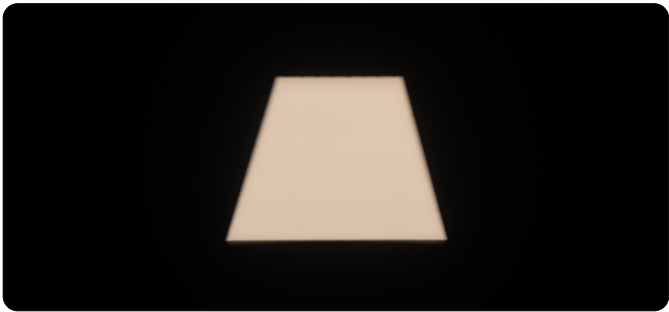

Application:

- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant

Accessories:

Gel frame

Gobo holder (opt.)

*Gobo size: E-sized, OD 37.5mm, image area 25.4mm


Panto Leko 60T

60W tunable LED profile spot IP65



Photometric 15° - 30°

WW(lx)	9820	2370	1070	630	415
CW(lx)	9910	2890	1290	752	506
Full on (lx)	11500	2730	1240	715	480

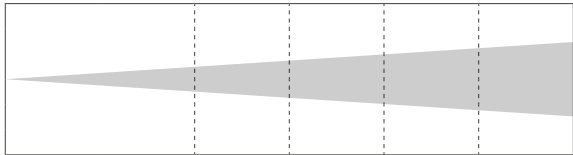


Distance(m)	1	2	3	4	5
Spot Diam(m)	0.26	0.67	1.00	1.34	1.67

Min. Spot - 15°

Photometric 25° - 40°


WW(lx)	7360	1440	623	341	224
CW(lx)	9920	1910	862	463	300
Full on (lx)	8550	1700	733	404	257

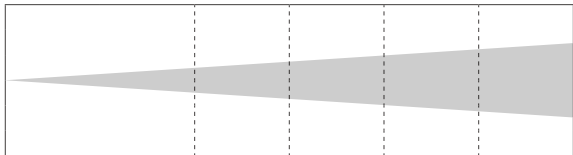

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.44	0.89	1.33	1.77	2.22

Min. Spot - 25°


WW(lx)	5220	1210	543	314	205
CW(lx)	6444	1470	648	384	251
Full on (lx)	6130	1390	629	364	237

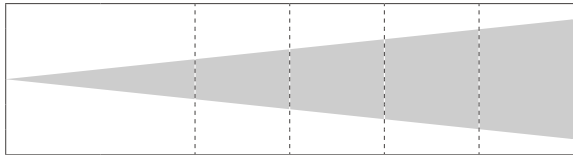

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.54	1.11	1.66	2.21	2.77

Max. Spot - 30°

WW(lx)	2720	699	315	180	125
CW(lx)	3430	860	392	233	157
Full on (lx)	3210	8819	370	212	148

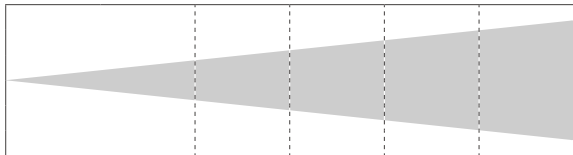

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.73	1.45	2.18	2.90	3.63

Max. Spot - 50°

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	60W WW + 60W CW LED
Color temperature:	2700K - 6000K adjustable
Zoom range:	15° - 30°, 25° - 50° optional
Color Rendition:	Avg. CRI 92
Power connection:	IP rated power in
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5

Control mode:	DMX, RDM
Housing:	Color black, die-casting aluminum
Size:	340 x 164 x 288mm
N.W.:	3 kg
G.W.:	4 kg
Accessories(incl.):	Power cable, Gel frame, Y split DMX cable, Safety rope
Accessories(opt.):	Gobo holder(E-sized), Clamp
Environment:	IP65



Panto Leko 60C is a 60W RGBL COB LED profile spot. Die-casting housing, fan-free design. With 15° - 30° and 25° - 50° zoom lens optional, flat and even color mixing. It's an idea product for art gallery, museum, shopping mall.


Key features:

- 60W RGBL LED(25W for each color)
- RGBL color mixing
- High CRI over 85+
- Die-casting aluminum housing, fan-free
- HD optics, 15° - 30° and 25° - 50° zoom lens optional
- Smooth dimming, flicker free
- Compact body, easy to set up
- DMX control of dimmer, RDM support
- IP65, indoor or outdoor use
- Support E-sized gobo holder

Application:


- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant

Accessories:



Gel frame Gobo holder (opt.)

*Gobo size: E-sized, OD 37.5mm, image area 25.4mm

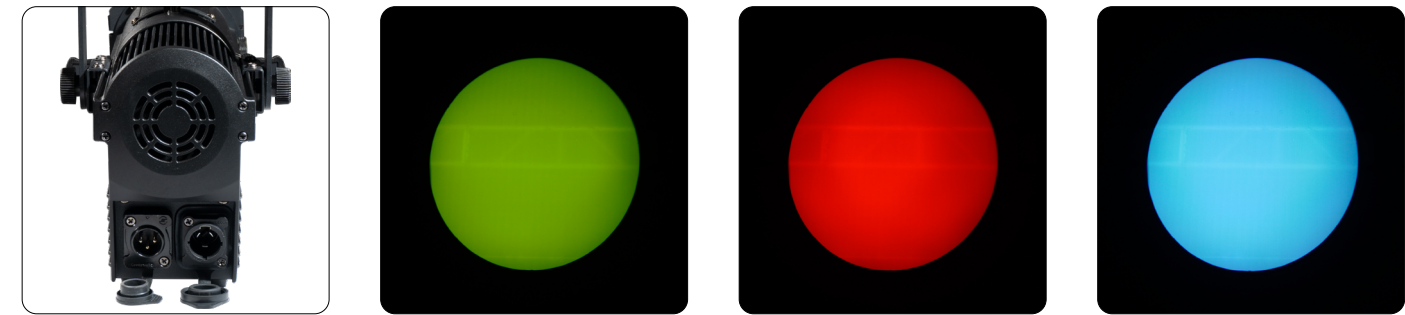

Panto Leko 60C

60W RGBL LED profile spot IP65



Technical Data

Power supply:	AC100 - 240V, 50/60Hz	Control mode:	DMX, RDM
Light source:	60W LED	Housing:	Color black, die-casting aluminum
Color mixing:	RGBL	Size:	340 x 164 x 288mm
Zoom range:	15° - 30°, 25° - 50° optional	N.W.:	3 kg
Color Rendition:	CRI 85+	G.W.:	4 kg
Power connection:	IP rated power in	Accessories(incl.):	Power cable, Gel frame, Y split DMX cable, Safety rope
Signal connection:	3-pin XLR in & out	Accessories(opt.):	Gobo holder(E-sized), Clamp
Control channels:	4/6/8	Environment:	IP65

92

CRI

Panto Fresnel 60T Zoom

60W tunable LED fresnel IP65

Panto Fresnel 60T Zoom is a IP65 60W tunable white LED fresnel spotlight. Die-casting housing, manual zoom 10° - 60°, fan-free design. Color temperature adjustable from 2700K - 6000K. It's an idea product for outdoor events, exhibitions, museum, shopping mall.


Key features:

- 60W WW + 60W CW constant output LED
- 2700K - 6000K adjustable
- High CRI over 92
- Die-casting aluminum housing, fan-free
- Rorate manual zoom 10° - 60°
- Smooth dimming, flicker free
- Compact body, easy to set up
- DMX control of dimmer, RDM support
- IP65, indoor or outdoor use
- Y split DMX cable for DMX connection


Application:

- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant

Accessories:




Barn door

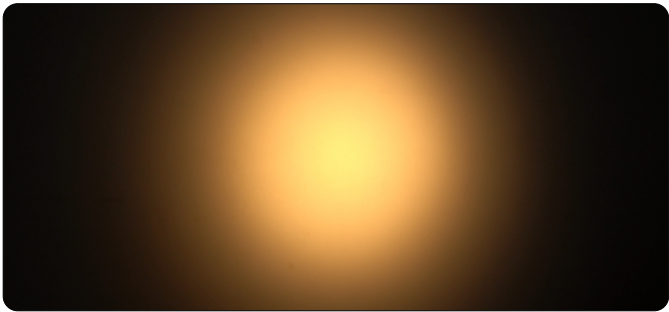

Photometric


WW(lx)	11800	3640	1550	862	542
CW(lx)	14400	4360	1890	1060	628
Full on (lx)	13500	3890	1760	976	594

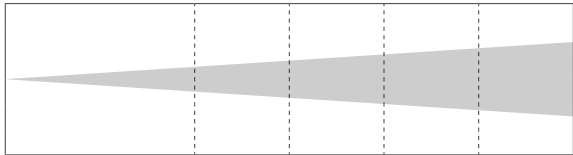

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.17	0.35	0.52	0.70	0.87

Min. Spot - 10°


Color Rendition - 4000K

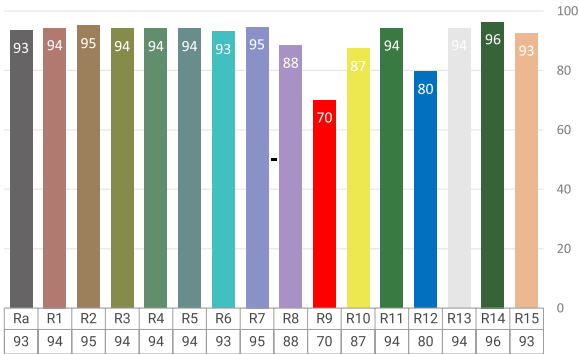

Technical Data



Power supply:	AC100 - 240V, 50/60Hz
Light source:	60W WW + 60W CW LED
Color temperature:	2700K - 6000K adjustable
Zoom range:	10° - 60° manual zoom
Color Rendition:	Avg. CRI 92
Power connection:	IP rated power in
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	1/2/3/5

WW(lx)	2550	806	341	201	132
CW(lx)	3060	965	415	241	158
Full on (lx)	2860	905	389	277	158

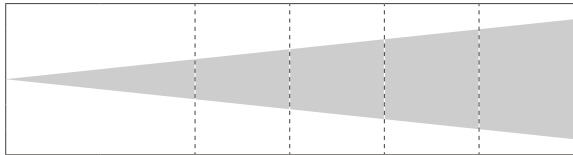

Distance(m)	1	2	3	4	5
Spot Diam(m)	1.15	2.30	3.45	4.60	5.75

Max. Spot - 60°

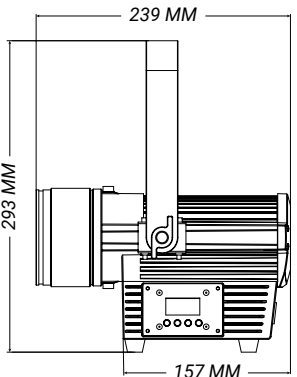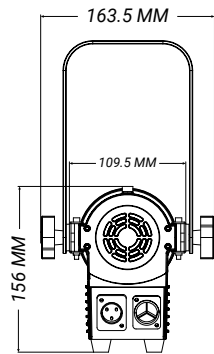

Control mode:	DMX, RDM
Housing:	Color black, die-casting aluminum
Size:	239 x 163.5 x 293mm
N.W.:	2.7 kg
G.W.:	3.5 kg
Accessories(incl.):	Power cable, Y split DMX cable, Safety rope
Accessories(opt.):	Barndoor, Clamp
Environment:	IP65



Panto Fresnel 60C Zoom

60W RGBL LED fresnel IP65

Panto Fresnel 60C Zoom is a IP65 60W RGBL LED fresnel spotlight. Die-casting housing, manual zoom 10° - 60°, fan-free design. Color mixing of RGBL mixing. It's an idea product for outdoor events, exhibitions, museum, shopping mall.


Key features:

- 60W RGBL LED(25W output each color)
- RGBL color mixing
- High CRI 80+
- Die-casting aluminum housing, fan-free
- Rorate manual zoom 10° - 60°
- Smooth dimming, flicker free
- Compact body, easy to set up
- DMX control of dimmer, RDM support
- IP65, indoor or outdoor use
- Y split DMX cable for DMX connection

Application:

- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant

Accessories:





Barn door



Technical Data

Power supply:	AC100 - 240V, 50/60Hz	Control mode:	DMX, RDM
Light source:	60W RGBL LED(each color 25W)	Housing:	Color black, die-casting aluminum
Color mixing:	RGBL	Size:	239 x 163.5 x 293mm
Zoom range:	10° - 60° manual zoom	N.W.:	2.7 kg
Color Rendition:	CRI 85+	G.W.:	3.5 kg
Power connection:	IP rated power in	Accessories(incl.):	Power cable, Y split DMX cable, Safety rope
Signal connection:	3-pin XLR in & out(5-pin optional)	Accessories(opt.):	Barndoor, Clamp
Control channels:	4/6/8	Environment:	IP65

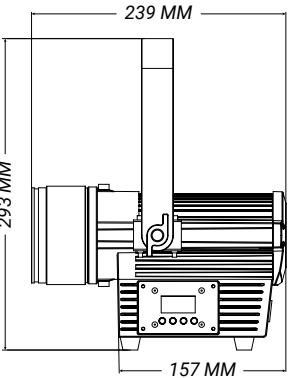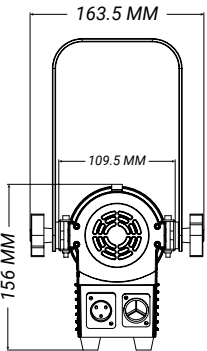

RDM

Control

COB

100W LED

ZOOM

Flicker Free

90+

CRI

CTC 100 Profile

100W tunable white LED profile zoom

CTC 100 Profile is a new member of the CTC profile family. It’s powered by an 100W 2700K - 6000K tunable white LED source with HD optics, bright and constant 100W output. Zoom lens available in 15° - 30° or 25° - 50°. The fixture comes with average high CRI over 90.

Key features:

- 100W COB white LED, constant output
- 2700K - 6000K color temperature
- Average CRI over 90
- HD optical system, clean shutter cuts beam
- 15° - 30° or 25° - 50° zoom lens, single side zoom
- Flicker free with selectable PWM
- Rotary, key, DMX control of dimmer
- Intelligent fan, silent operation for studio and theatre use
- Super compact body, only 3.5 kg, easy to install and setup
- IP rated powercon in, DMX in & out


Application:

- Broadcast, HD studio
- Theatre, chruch
- Fashion show
- Museum
- Exhibition


Accessories:

Gel frame


Gobo holder (opt.)

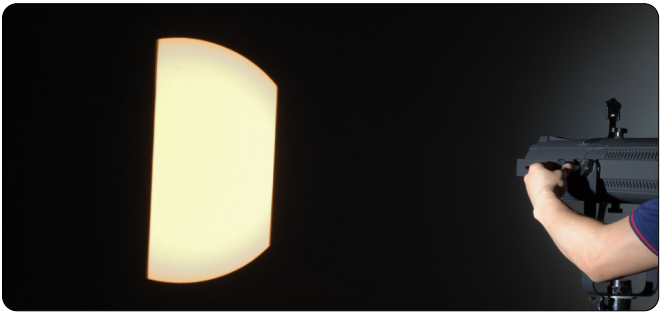

Photometric


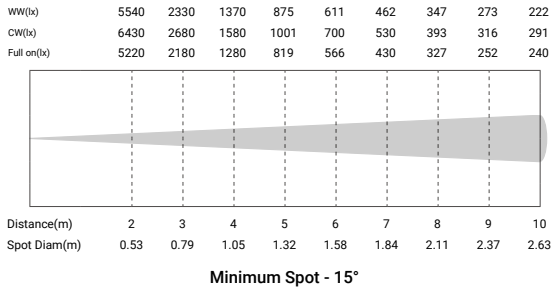


Color Rendition 5600K

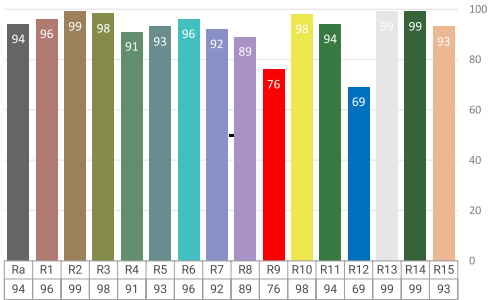

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	100W tunable white COB LED
Color temperature:	2700K - 6000K
Zoom range:	15° - 30° or 25° - 50° manual zoom
Color Rendition:	CRI over 90, CQS 90(5600K)
Power connection:	IP rated powercon in
Signal connection:	3-pin XLR in & out
Control channels:	2/5
Control mode:	Rotary, DMX, RDM
Housing:	Color black, engineering plastic

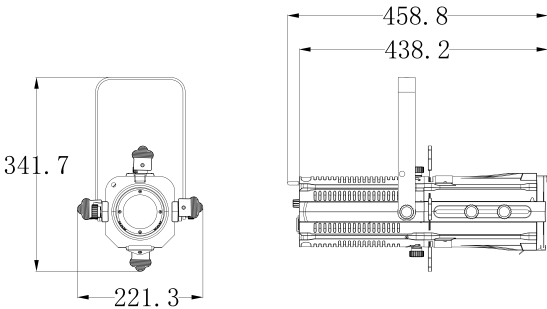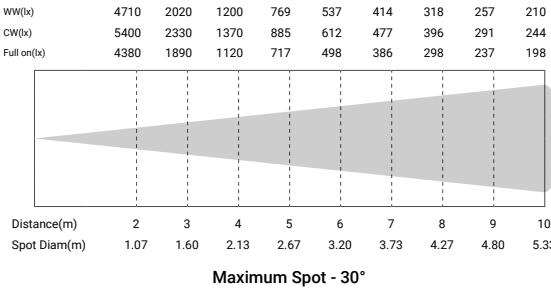

Size:	459 x 221 x 342mm
Package(carton):	560 x 280 x 330mm
N.W.:	3.5 kg
G.W.:	5 kg
Accessories(incl.):	Power cable, gel frame, Safety rope
Accessories(opt.):	Gobo holder, Clamp, Y split powerr cable
GOBO Size:	OD 38mm
Compliance:	Pending
Environment:	IP20

RGBL LED

RDM

Control

C08

100W LED

ZOOM

Flicker Free

85+



CRI

Honor 100C is a 100W RGBL LED profile spot. The fixture is super compact in size and weight as well as even and flat color mixing. Zoom lens available in 15° - 30° or 25° - 50°. With RGBL mixing, the CRI can reach over 85.

- Key features:
- 100W RGBL LED, each color 65 - 80Watt
 - CRI over 85 in CT channel
 - HD optical system, clean shutter cuts beam
 - 15° - 30° or 25° - 50° zoom lens, single side zoom
 - Flicker free with selectable PWM
 - Rotary, key, DMX control of dimmer
 - Intelligent fan, silent operation for studio and theatre use
 - Super compact body, only 3.5 kg, easy to install and setup
 - IP rated powercon in, DMX in & out

- Application:
- Theatre, chruch
 - Exhibition

Accessories:

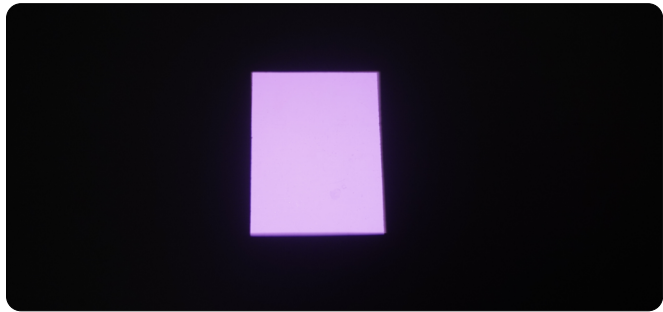


Honor 100C Zoom

100W RGBL white LED profile zoom




Photometric

R (lx)	1290	553	315	208	137	105	79	67	64
G (lx)	2970	1280	741	480	319	247	186	145	142
B (lx)	595	255	146	93	63	48	26	29	26
L (lx)	3650	1580	881	580	398	294	224	176	167
Full on(lx)	2800	1210	691	443	303	297	174	139	118

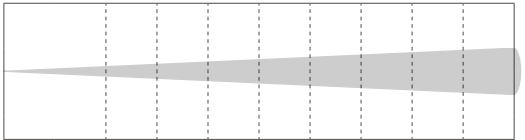

Distance(m)	2	3	4	5	6	7	8	9	10
Spot Diam(m)	0.53	0.79	1.05	1.32	1.58	1.84	2.11	2.37	2.63

Minimum Spot - 15°									
R (lx)	983	424	243	142	101	79	63	51	43
G (lx)	2430	1030	599	346	247	197	155	126	103
B (lx)	451	193	109	64	45	34	27	22	19
L (lx)	3650	1580	881	580	398	294	224	176	167
Full on(lx)	2060	872	509	295	211	162	128	105	89

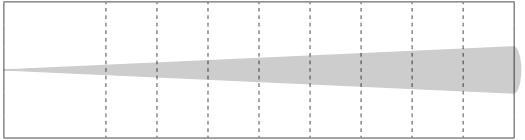


Distance(m)	2	3	4	5	6	7	8	9	10
Spot Diam(m)	0.89	1.33	1.77	2.22	2.66	3.10	3.55	3.99	4.43

Minimum Spot - 25°									
--------------------	--	--	--	--	--	--	--	--	--

Technical Data


Power supply:	AC100 - 240V, 50/60Hz
Light source:	100W RGBL LED, each color 65W - 80W
Zoom range:	15° - 30° or 25° - 50° manual zoom
Color Rendition:	CRI over 85 in CT channel
Power connection:	IP rated powercon in
Signal connection:	3-pin XLR in & out
Control channels:	1/4/6/10
Control mode:	Rotary, DMX, RDM
Housing:	Color black, engineering plastic

R (lx)	828	368	222	145	103	77	63	56	51
G (lx)	2000	937	559	378	242	196	148	126	122
B (lx)	402	183	108	69	47	36	29	23	21
L (lx)	2220	957	598	368	257	198	161	133	128
Full on(lx)	1750	789	486	298	216	164	136	101	87

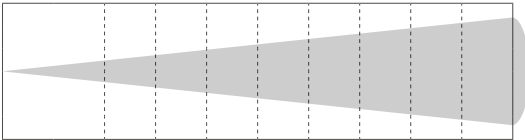

Distance(m)	2	3	4	5	6	7	8	9	10
Spot Diam(m)	1.07	1.60	2.13	2.67	3.20	3.73	4.27	4.80	5.33

Maximum Spot - 30°									
R (lx)	370	159	97	62	48	46	46	28	17
G (lx)	894	388	235	151	120	103	103	68	44
B (lx)	169	72	43	27	22	18	18	13	8
L (lx)	868	377	231	149	97	93	93	67	42
Full on(lx)	749	324	199	128	103	84	84	58	37

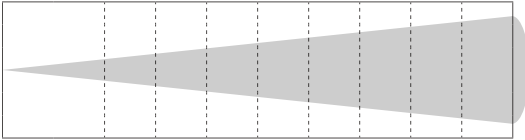

Distance(m)	2	3	4	5	6	7	8	9	10
Spot Diam(m)	1.87	2.80	3.73	4.67	5.60	6.53	7.47	8.40	9.33

Maximum Spot - 50°									
--------------------	--	--	--	--	--	--	--	--	--

Size:	459 x 221 x 342mm
Package(carton):	560 x 280 x 330mm
N.W.:	3.5 kg
G.W.:	5 kg
Accessories(incl.):	Power cable, gel frame, Safety rope
Accessories(opt.):	Gobo holder, Clamp, Y split powerr cable
GOBO Size:	OD 38mm
Compliance:	CE
Environment:	IP20

2700K - 6000K

RDM
Control

COB
100W LED

ZOOM

Flicker Free

90+
CRI

Event 100 Profile is a economic version of the CTC 100 Profile with digital display. It's powered by an 100W 2700K - 6000K tunable white LED source with HD optics, bright and constant 100W output. Zoom lens available in 15° - 30° or 25° - 50°. The fixture comes with average high CRI over 90.


Key features:

- 100W COB white LED, constant output
- 2700K - 6000K color temperature
- Average CRI over 90
- HD optical system, clean shutter cuts beam
- 15° - 30° or 25° - 50° zoom lens, single side zoom
- Flicker free with selectable PWM
- Rotary, key, DMX control of dimmer
- Digital display, silent operation
- Super compact body, only 3.5 kg, easy to install and setup
- IP rated powercon in, DMX in & out


Application:

- Broadcast, HD studio
- Theatre, chruch
- Fashion show
- Museum
- Exhibition


Accessories:



Gel frame



Gobo holder (opt.)

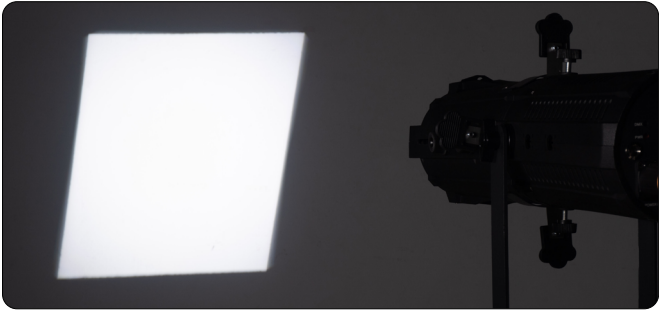


Event 100 Profile

100W tunable white LED profile zoom



Photometric


WW(lx)	5540	2330	1370	875	611	462	347	273	222
CW(lx)	6430	2680	1580	1001	700	530	393	316	291
Full on(lx)	5220	2180	1280	819	566	430	327	252	240

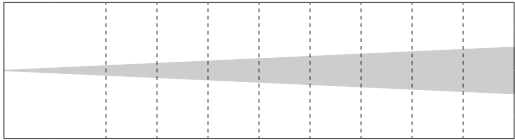

Distance(m)	2	3	4	5	6	7	8	9	10
Spot Diam(m)	0.53	0.79	1.05	1.32	1.58	1.84	2.11	2.37	2.63

Minimum Spot - 15°


Color Rendition 5600K

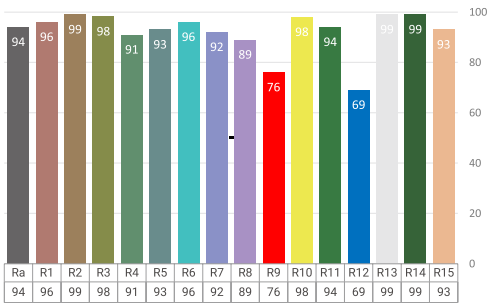

Technical Data


Power supply:	AC100 - 240V, 50/60Hz
Light source:	100W tunable white COB LED
Color temperature:	2700K - 6000K
Zoom range:	15° - 30° or 25° - 50° manual zoom
Color Rendition:	CRI over 90, CQS 90(5600K)
Power connection:	IP rated powercon in
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5
Control mode:	Rotary, DMX, RDM

WW(lx)	4710	2020	1200	769	537	414	318	257	210
CW(lx)	5400	2330	1370	885	612	477	396	291	244
Full on(lx)	4380	1890	1120	717	498	386	298	237	198

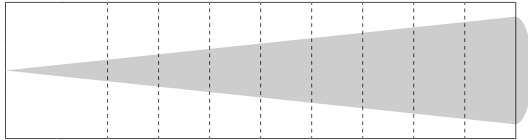

Distance(m)	2	3	4	5	6	7	8	9	10
Spot Diam(m)	1.07	1.60	2.13	2.67	3.20	3.73	4.27	4.80	5.33

Maximum Spot - 30°

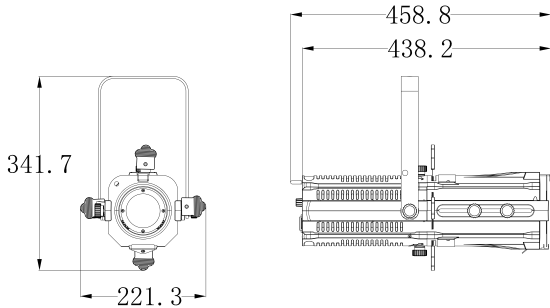

Housing:	Color black, engineering plastic
Size:	459 x 221 x 342mm
Package(carton):	560 x 280 x 330mm
N.W.:	3.5 kg
G.W.:	5 kg
Accessories(incl.):	Power cable, gel frame, Safety rope
Accessories(opt.):	Gobo holder, Clamp, Y split powerr cable
GOBO Size:	OD 38mm
Environment:	IP20

RGBL LED

RDM

Control

COB

100W LED

ZOOM

Flicker Free

85+


CRI

Event 100C Profile is a economic version of the Honor 100C Zoom but with digital display. The fixture is super compact in size and weight as well as even and flat color mixing. Zoom lens available in 15° - 30° or 25° - 50°. With RGBL mixing, the CRI can reach over 85.


- Key features:
- 100W RGBL LED(55W R + 65W G + 65W B + 65W L)
 - CRI over 85 in CT channel
 - HD optical system, clean shutter cuts beam
 - 15° - 30° or 25° - 50° zoom lens, single side zoom
 - Flicker free with selectable PWM
 - Rotary, key, DMX control of dimmer
 - Digital display, silent operation, silent operation for studio and theatre use
 - Super compact body, only 3.5 kg, easy to install and setup
 - IP rated powercon in, DMX in & out

- Application:
- Theatre, chruch
 - Exhibition

Accessories:



Gel frame




Gobo holder (opt.)

Event 100C Profile

100W RGBL white LED profile zoom




Photometric

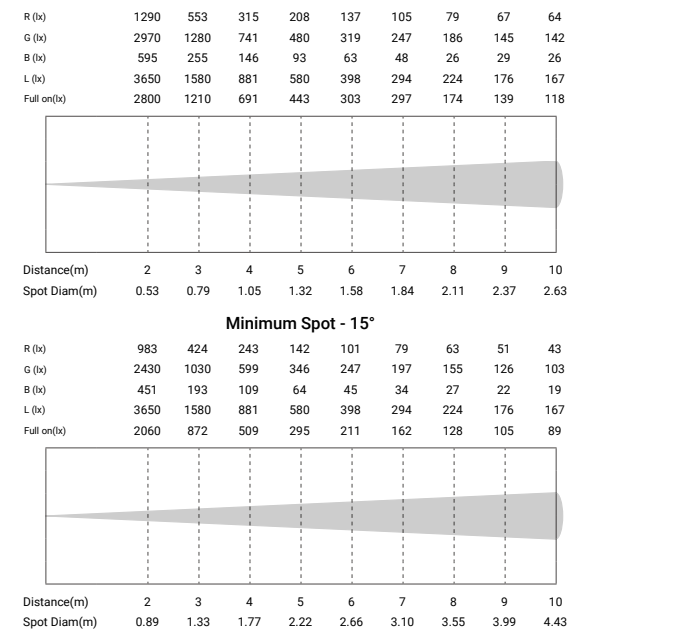

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	100W RGBL LED(55W R + 65W G + 65W B + 65W L)
Zoom range:	15° - 30° or 25° - 50° manual zoom
Color Rendition:	CRI over 85 in CT channel
Power connection:	IP rated powercon in
Signal connection:	3-pin XLR in & out
Control channels:	3/4/5/6/11
Control mode:	Rotary, DMX, RDM
Housing:	Color black, engineering plastic

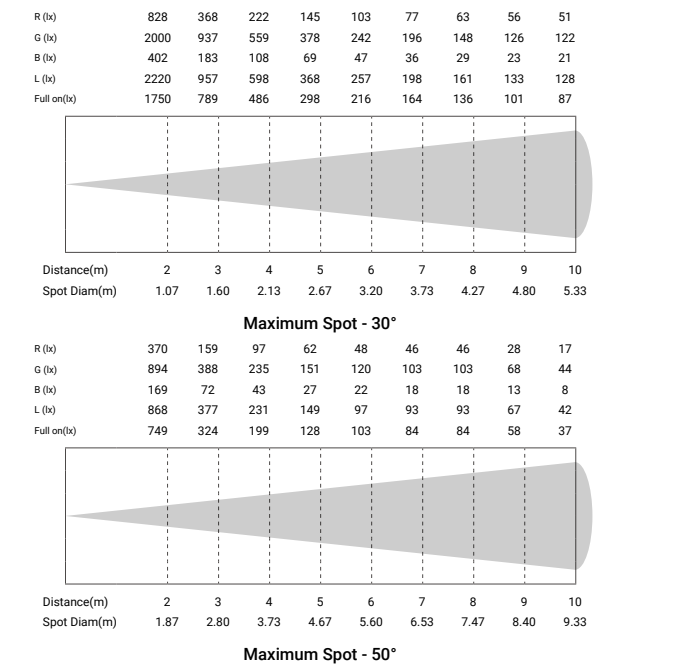

Size:	459 x 221 x 342mm
Package(carton):	560 x 280 x 330mm
N.W.:	3.5 kg
G.W.:	5 kg
Accessories(incl.):	Power cable, gel frame, Safety rope
Accessories(opt.):	Gobo holder, Clamp, Y split powerr cable
GOBO Size:	OD 38mm
Compliance:	CE
Environment:	IP20



The Honor 250C Zoom is a 250W LED profile spot with RGBL color mixing. A good replacement of the tungsten source. The 18-38° all-in-one zoom range covers the most regular 19°, 26°, 36° lens.


Key features:

- 250W RGBL LED
- 3000K ~ 8000K color temp
- HQ optical system, clean shutter cuts beam
- 18-38° “all-in-one” zoom range
- Smooth dimming, flicker free
- Rotary, Key, DMX control of dmmer
- Intelligent temperature control
- Engine and lens compatible with industry standard

Application:


- Theatre, chruch
- Museum
- Exhibition lighting

Accessories:

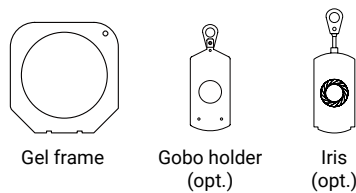


Honor 250C Zoom

250W RGBL profile zoom



Photometric


R(lx)	680	365	263	222	176	135	63
G(lx)	119	654	489	422	337	254	117
B(lx)	282	162	118	95	78	54	29
W(lx)	1940	1060	817	695	562	425	197
Full on(lx)	3840	2100	1580	1380	1100	839	390

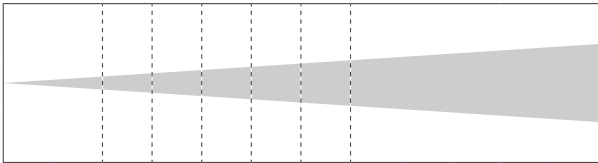

Distance(m)	5	6	7	8	9	10	15
Spot Diam(m)	1.49	1.79	2.09	2.39	2.69	2.99	4.48


Min. Spot - 18°

R(lx)	234	164	112	85	68	56	27
G(lx)	414	281	207	160	126	102	52
B(lx)	101	64	53	42	30	24	13
w(lx)	682	450	345	263	213	125	89
Full on(lx)	1330	879	672	513	411	350	65

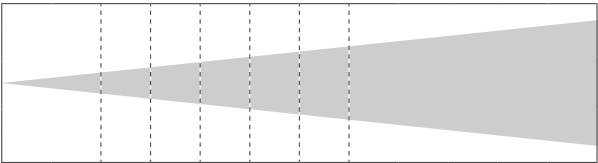

Distance(m)	5	6	7	8	9	10	15
Spot Diam(m)	2.85	3.42	3.99	4.56	5.13	5.7	8.55

Max. Spot - 38°

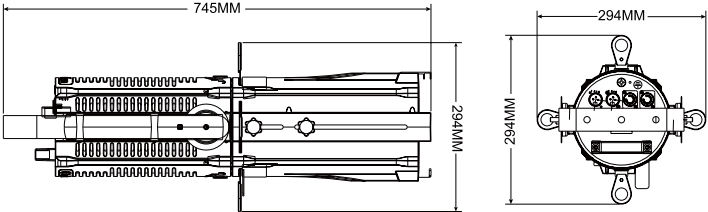

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	250W LED
Color mixing:	RGBL
Color temperature:	3000K ~ 8000K tunable
Zoom range:	18°-38°, 25°-50° optional
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	1/4/6/10
Control mode:	Rotary, DMX, RDM
Housing:	Color black, engineering plastic

Size:	745 x 294 x 294mm
Package(carton):	790 x 350 x 360mm
N.W.:	8.7 kg
G.W.:	11.5 kg
Accessories(incl.):	Power cable, Gel frame, Safety rope
Accessories(opt.):	Gobo holder, Clamp
GOBOSize:	OD 58mm, image area 50mm
Compliance:	CE
Environment:	IP20

RDM

Control

COB

300W LED

ZOOM

Flicker Free

98

TLCI

97

CRI

Powered by 300W 3200K or 5600K LED, the Honor 300 Zoom is designed to replace the 1K Tungsten Halogen profile light. The 18-38° “all-in-one” zoom range covers the most regular 19°, 26°, 36° lens. It creates a flat and even field of light and crisp pattern projection.

Key features:

- 300W COB white LED
- CRI 97, R9≥90, TLCI up to 98
- HD optical system, clean shutter cuts beam
- 18-38° "all-in-one" zoom range
- 16 bit dimming via DMX
- Flicker free with selectable PWM
- Rotary, key, DMX control of dimmer
- Silent operation for studio and theatre use
- Engine and lens compatible with industry standard

Application:

- Broadcast, HD studio
- Theatre, chruch
- Fashion show
- Museum
- Exhibition lighting

Accessories:

Gel frame

Gobo holder (opt.)

Iris (opt.)



Honor 300 Zoom

WW or CW


300W LED profile zoom



Photometric

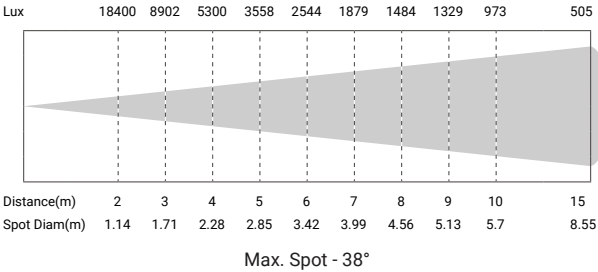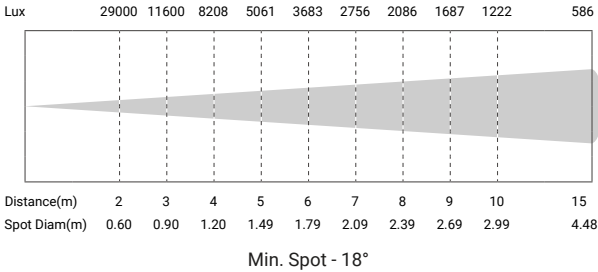

Color Rendition

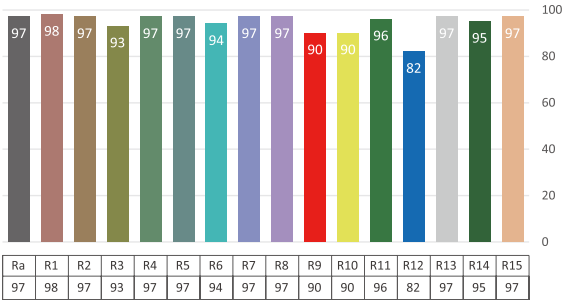

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	300W COB LED
Color temperature:	3200K or 5600K
Zoom range:	18°-38°, 25°-50° optional
Color Rendition:	CRI 97, R9≥90, TLCI 98, CQS 94
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out, 5-pin in & out
Control channels:	1/2/3
Control mode:	Rotary, DMX, RDM
Housing:	Color black, engineering plastic

Size:	745 x 294 x 294mm
Package(carton):	790 x 350 x 360mm
N.W.:	8.7 kg
G.W.:	11.5 kg
Accessories(incl.):	Power cable, gel frame, Safety rope
Accessories(opt.):	Gobo holder, Clamp
GOBOSize:	OD 58mm, image area 48mm
Compliance:	CE
Environment:	IP20

300W
tunable

RDM
Control

98
TLCI

97
CRI

CTC 300 Profile equipped with a 600W LED (300W WW+300W CW constant output). 2800K - 6500K color temperature adjustable. A good replacement of the tungsten source. The 18-38° all-in-one zoom range covers the most regular 19°, 26°, 36° lens.

Key features:

- 300W tunable white LED
- 300W WW+300W CW, 2800K - 6500K adjustable
- High CRI of 97, R9≥97
- HD optical system, clean shutter cuts beam
- 18° - 38° "all-in-one" zoom range
- Smooth dimming
- Video flicker free
- Rotary, key, DMX, RDM control of dimmer
- Intelligent temperature control, silent operation for studio and theater use


Application:

- Broadcast, HD studio
- Theatre, church
- Fashion show
- Museum
- Exhibition lighting

Accessories:




Gel frame



Gobo holder (opt.)



Iris (opt.)

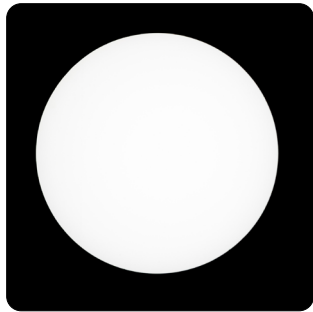


CTC 300 Profile


300W + 300W tunable LED profile zoom



Photometric


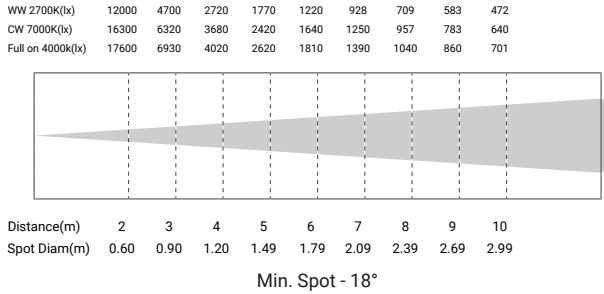


Color Rendition

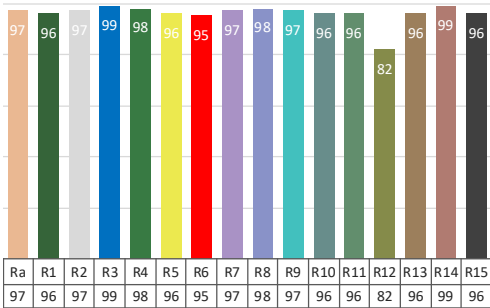


Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	300W tunable LED
Color temperature:	2800K - 6500K
Zoom range:	18°-38°, 25°-50° optional
Color Rendition:	CRI 97, R9≥97, TLCI 98
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out(5-pin opt.)
Control channels:	2/3
Control mode:	Rotary, DMX, RDM
Housing:	Color black, engineering plastic

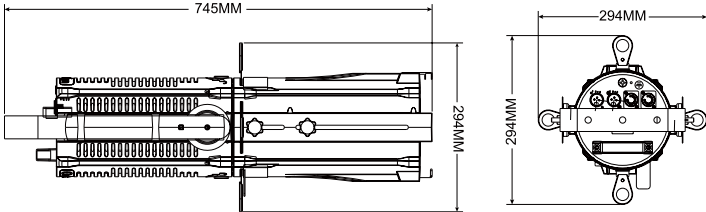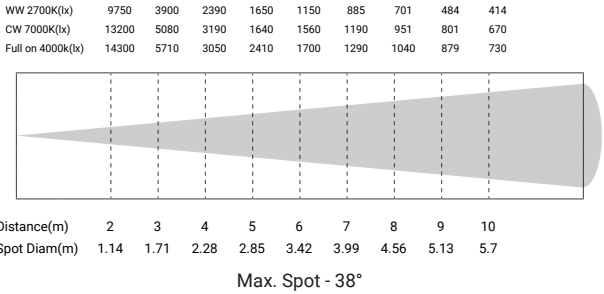

Size:	745 x 294 x 294mm
Package(carton):	790 x 350 x 360mm
N.W.:	8.7 kg
G.W.:	11.5 kg
Accessories(incl.):	Power cable, gel frame, Safety rope
Accessories(opt.):	Iris, Gobo holder, Clamp
GOBOSize:	OD 58mm, image area 50mm
Compliance:	CE
Environment:	IP20



Honor 350C Zoom

350W 6 color profile zoom

The Honor 350C Zoom is a 350W LED profile spot with RGBALC color mixing. A good replacement of the tungsten source. It creates a flat and even color mixing.



Key features:

- 350W RGBALC six color LED
- Super flat and even color mixing
- 3000K - 8000K color temperature
- 18 - 38° "all-in-one" zoom range
- Smooth dimming, flicker free
- High CRI of 95, TLCI 95(CT channel)
- Rotary, key, DMX control of dimmer
- Intelligent temperature control
- Engine and lens compatible with industry standard

Application:


- Theatre, chruch
- Museum
- Exhibition lighting

Accessories:

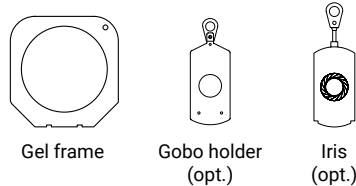

Photometric


R(lx)	405	95	51
G(lx)	680	160	85
B(lx)	79	31	22
A(lx)	1440	340	181
L(lx)	2260	510	281
C(lx)	430	102	54
Full on(lx)	4850	1120	618

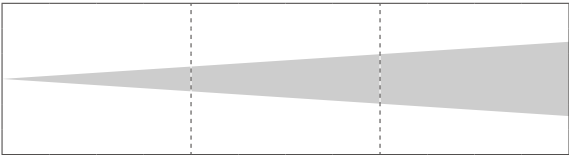

Distance(m)	5	10	15
Spot Diam(m)	1.49	2.99	4.48

Min. Spot - 18°


Color Temperature Channel-CRI

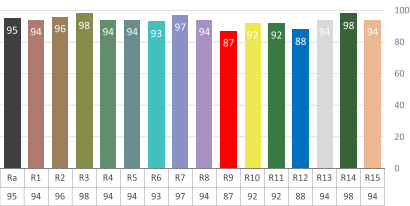

Technical Data


Power supply:	AC100 - 240V, 50/60Hz
Light source:	350W RGBALC LED
Color mixing:	RGBALC(amber, lime, cyan)
Color temperature:	3000K - 8000K tunable
Zoom range:	18°-38°, 25°-50° optional
Color Rendition:	CRI, TLCI≥95(CT channel), CRI 85(full on)
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out, 5-pin XLR in & out
Control channels:	2/8/12
Control mode:	Rotary, DMX and RDM

R(lx)	128	36	51
G(lx)	229	57	30
B(lx)	62	15	8
A(lx)	496	125	68
L(lx)	749	196	104
C(lx)	146	36	20
Full on(lx)	1550	420	220

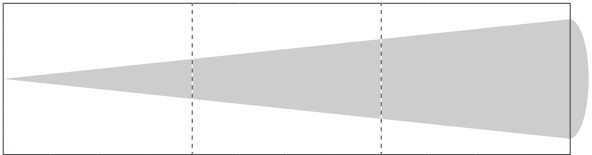

Distance(m)	5	10	15
Spot Diam(m)	2.85	5.7	8.55

Max. Spot - 38°

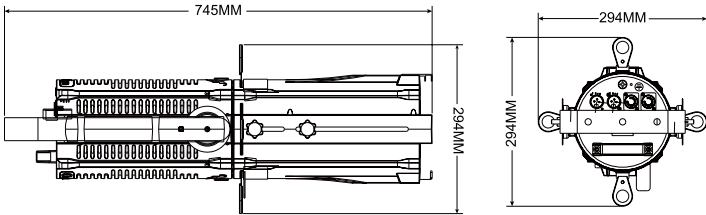

Housing:	Color black, engineering plastic
Size:	745 x 294 x 294mm
Package(carton):	790 x 350 x 360mm
N.W.:	8.7 kg
G.W.:	11.5 kg
Accessories(incl.):	Power cable, Gel frame, Safety rope
Accessories(opt.):	Gobo holder, Clamp
GOBOSize:	OD 58mm, image area 50mm
Compliance:	CE
Environment:	IP20



300W
tunable

RDM
Control

ZOOM



98
TLCI

97
CRI

EVENT 300T Profile

300W + 300W tunable LED profile zoom

Event 300 Profile equipped with a viration of CTC 300 Profile. It comes with the same display and dual knob design as the Event 200T. 2800K - 6500K color temperature adjustable. A good replacement of the tungsten source. The 18-38° all-in-one zoom range covers the most regular 19°, 26°, 36° lens.

Key features:

- 300W tunable white LED
- 300W WW+300W CW, 2800K - 6500K adjustable
- High CRI of 97, R9≥97
- Designed for events, exhibitions
- Two knob design, one for CCT, one for dimmer
- HD optical system, clean shutter cuts beam
- 18° - 38° "all-in-one" zoom range
- Digital display, dual knob control
- Video flicker free
- Rotary, key, DMX, RDM control of dimmer
- Intelligent temperature control, silent operation for studio and theater use


Application:

- Broadcast, HD studio
- Theatre, chruch
- Fashion show
- Museum
- Exhibition lighting

Accessories:





Gel frame



Gobo holder (opt.)




Iris (opt.)



Photometric


WW 2700K(lx)	12000	4700	2720	1770	1220	928	709	583	472
CW 7000K(lx)	16300	6320	3680	2420	1640	1250	957	783	640
Full on 4000K(lx)	17600	6930	4020	2620	1810	1390	1040	860	701

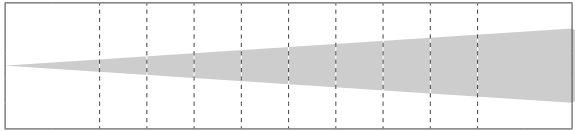

Distance(m)	2	3	4	5	6	7	8	9	10
Spot Diam(m)	0.60	0.90	1.20	1.49	1.79	2.09	2.39	2.69	2.99

Min. Spot - 18°

Color Rendition

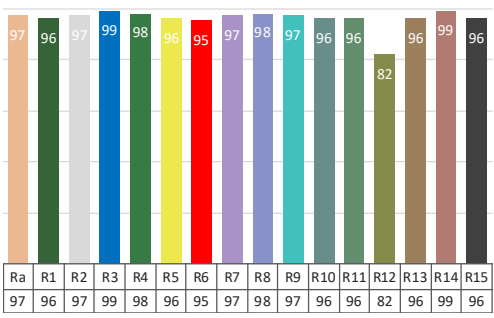


Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97	96	97	99	98	96	95	97	98	97	96	96	82	96	99	96

Technical Data


Power supply:	AC100-240V, 50/60Hz
Light source:	300W tunable LED
Color temperature:	2800K - 6500K
Zoom range:	18°-38°, 25°-50° optional
Color Rendition:	CRI 97, R9≥97, TLCI 98
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out(5-pin opt.)
Control channels:	1/2/3/5
Control mode:	Rotary, DMX, RDM

WW 2700K(lx)	9750	3900	2390	1650	1150	885	701	484	414
CW 7000K(lx)	13200	5080	3190	1640	1560	1190	951	801	670
Full on 4000K(lx)	14300	5710	3050	2410	1700	1290	1040	879	730

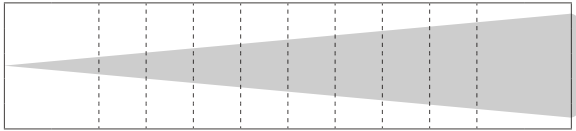

Distance(m)	2	3	4	5	6	7	8	9	10
Spot Diam(m)	1.14	1.71	2.28	2.85	3.42	3.99	4.56	5.13	5.7

Max. Spot - 38°

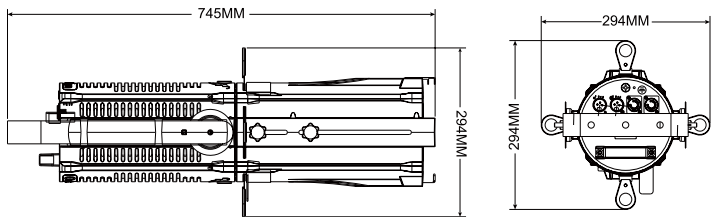

Housing:	Color black, engineering plastic
Size:	745 x 294 x 294mm
Package(carton):	790 x 350 x 360mm
N.W.:	8.7 kg
G.W.:	11.5 kg
Accessories(incl.):	Power cable, gel frame, Safety rope
Accessories(opt.):	Iris, Gobo holder, Clamp
GOBOSize:	OD 58mm, image area 50mm
Environment:	IP20



Event 300C Profile

300W RGBL LED profile zoom

Event 300C Profile is a high power profile spot light with RGBL color mixing. 300Watt max output and each color with 100W power. A good replacement of the tungsten source. Zoom lens option of 18° - 38° or 25°-50° . RGBL color mixing makes high CRI possible.



Key features:

- 300W max power, each color 100W output
- High CRI over 85 in CT channel
- HQ optical system, clean shutter cuts beam
- Zoom lens 18° - 38° and 25° - 50° optional
- Upgraded single side zoom operation, smoother and user
- Smooth dimming, flicker free
- Rotary, Key, DMX control of dmmer
- Intelligent temperature control
- Engine and lens compatible with industry standard

Application:


- Theatre, chruch
- Museum
- Exhibition lighting

Accessories:

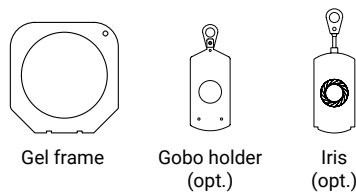

Technical Data

Power supply:	AC100 - 240V, 50/60Hz	Size:	745 x 294 x 294mm
Light source:	400W LED with 300W max output (100W R + 100W G + 100W B + 100W L)	Package(carton):	790 x 350 x 360mm
Color mixing:	RGBL	N.W.:	8.7 kg
Zoom range:	18°-38°, 25°-50° optional	G.W.:	11.5 kg
Power connection:	PowerCON in & out	Accessories(incl.):	Power cable, Gel frame, Safety rope
Signal connection:	3-pin XLR in & out(5-pin optional)	Accessories(opt.):	Gobo holder, Clamp
Control channels:	3/4/5/6/11CH	GOBOSize:	OD 58mm, image area 50mm
Control mode:	Rotary, DMX, RDM	Compliance:	CE
Housing:	Color black, engineering plastic	Environment:	IP20

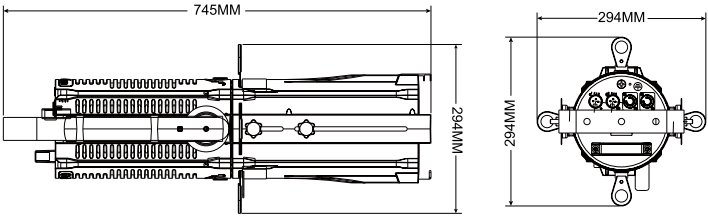



Profile S250C is a 250W RGBL powered LED ellipsoidal light fixture. Lens available at 19°, 26°, 36°, 50°. HD optics and four shutters to control the shape of the light. Even and flat color mixing. Fixture also equipped with powercon in & out connector.


Key features:

- 250W LED source
- RGBL color mixing
- HD optical system, clean shutter cuts beam
- 19°, 26°, 36°, 50° lens optional
- Smooth dimming, flicker free operation
- Flicker free with selectable PWM
- Rotary, key, DMX control of dimmer
- Silent operation for studio and theatre use
- Aluminum housing, robust construction


Application:

- Broadcast, HD studio
- Theatre, church
- Fashion show
- Museum
- Exhibition lighting

Accessories:




Gel frame



Gobo holder (opt.)

Profile S250C

300W LED profile with fixed lens

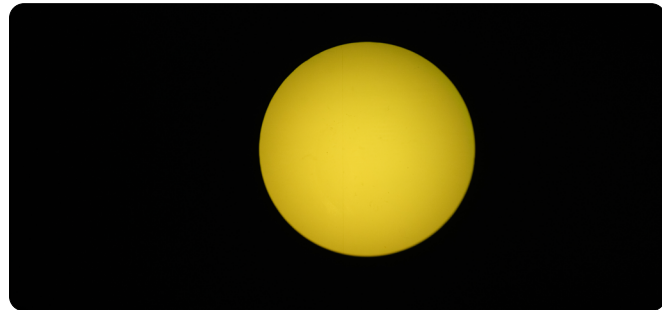

Technical Data

Power supply:	AC100 - 240V, 50/60Hz	Housing:	Color black, aluminum
Light source:	250W LED	Size:	700 x 270 x 263mm
Color:	RGBL	Package(carton):	740 x 340 x 320mm
Fixed lens:	19°, 26°, 36°, 50°	N.W.:	8.6 kg
Power connection:	PowerCON in & out	G.W.:	10 kg
Signal connection:	3-pin XLR in & out(5-pin opt.)	Accessories(incl.):	Power cable, Gel frame, Safety rope
Control channels:	1/4/6/10	Accessories(opt.):	Gobo holder, Clamp
Control mode:	Rotary, DMX, RDM	Environment:	IP20



3200K or 5600K



RDM
Control



COB
300W LED



ZOOM



Flicker Free

98
TLCI

97
CRI

Profile S300 is a 300W 3200K or 5600K powered LED ellipsoidal light fixture. Lens available at 19°, 26°, 36°, 50°. HD optics and four shutters to control the shape of the light. Fixture also equipped with powercon in & out connector.


Key features:

- 300W COB white LED
- CRI 97, R9≥90, TLCI up to 98
- HD optical system, clean shutter cuts beam
- 19°, 26°, 36°, 50° lens optional
- Smooth dimming, flicker free operation
- Flicker free with selectable PWM
- Rotary, key, DMX control of dimmer
- Silent operation for studio and theatre use
- Aluminum housing, robust construction


Application:

- Broadcast, HD studio
- Theatre, chruch
- Fashion show
- Museum
- Exhibition lighting


Accessories:



Gel frame



Gobo holder (opt.)

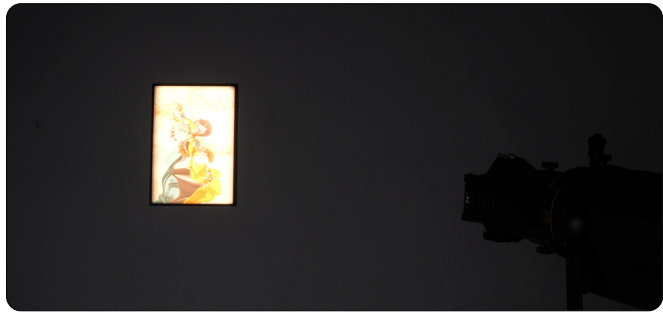


Profile S300

WW or CW

300W LED profile with fixed lens



Photometric

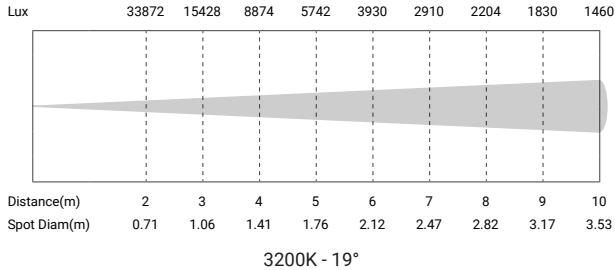

Color Rendition



Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	300W COB LED
Color temperature:	3200K or 5600K
Fixed lens:	19°, 26°, 36°, 50°
Color Rendition:	CRI 97, R9≥90, TLCI 98, CQS 94
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out(5-pin opt.)
Control channels:	1/2/3
Control mode:	Rotary, DMX, RDM

Housing:	Color black, aluminum
Size:	700 x 270 x 263mm
Package(carton):	740 x 340 x 320mm
N.W.:	8.6 kg
G.W.:	10 kg
Accessories(incl.):	Power cable, Gel frame, Safety rope
Accessories(opt.):	Gobo holder, Clamp
Environment:	IP20



2800K - 6500K



RDM
Control



300W
tunable



ZOOM



Flicker Free



98
TLCI



97
CRI

Profile S300T is a 300W tunable white powered LED ellipsoidal light fixture. Lens available at 19°, 26°, 36°, 50°. HD optics and four shutters to control the shape of the light. Fixture also equipped with powercon in & out connector.


Key features:

- 300W tunable white LED
- 300W WW+300W CW, 2800K-6500K adjustable
- HD optical system, clean shutter cuts beam
- 19°, 26°, 36°, 50° lens optional
- Smooth dimming, flicker free operation
- Flicker free with selectable PWM
- Rotary, key, DMX control of dimmer
- Silent operation for studio and theatre use
- Aluminum housing, robust construction
- Intelligent temperature control, silent operation for studio and theater use


Application:

- Broadcast, HD studio
- Theatre, chruch
- Fashion show
- Museum
- Exhibition lighting

Accessories:




Gel frame




Gobo holder (opt.)

Profile S300T


300W LED profile with fixed lens

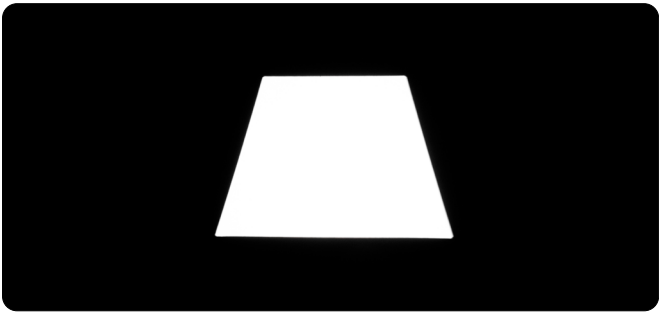

Color Rendition

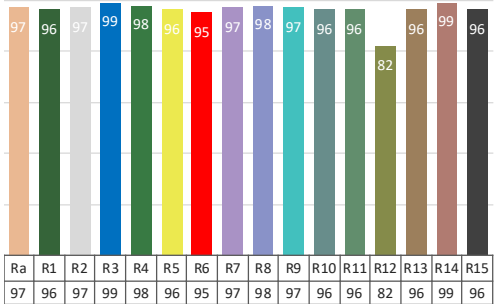

Drawing

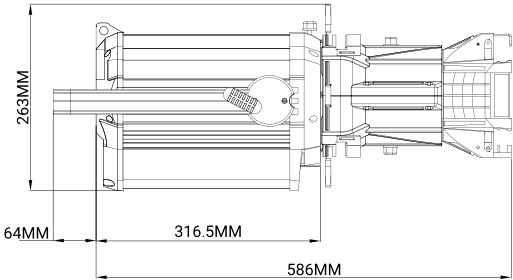

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	300W tunable white COB LED
Color temperature:	2800K - 6500K
Fixed lens:	19°, 26°, 36°, 50° optional
Color Rendition:	CRI 97, R9≥90, TLCI 98, CQS 94
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out(5-pin opt.)
Control channels:	2/3
Control mode:	Rotary, DMX, RDM

Housing:	Color black, aluminum
Size:	700 x 270 x 263mm
Package(carton):	740 x 340 x 320mm
N.W.:	8.6 kg
G.W.:	10 kg
Accessories(incl.):	Power cable, Gel frame, Safety rope
Accessories(opt.):	Gobo holder, Clamp
Environment:	IP20

RDM

Control

95

CRI

Flicker Free

RGBALC

Profile S350C

350W RGBALC LED profile with fixed lens

Profile S350C is a 350W RGBALC powered LED ellipsoidal light fixture. Lens available at 19°, 26°, 36°, 50°. HD optics and four shutters to control the shape of the light. Even and flat color mixing. CRI over 95. Fixture also equipped with powercon in & out connector.


Key features:

- 350W LED
- RGBALC even and flat color mixing
- HD optical system, clean shutter cuts beam
- 19°, 26°, 36°, 50° lens optional
- High CRI of 95, TLCI 95(CT channel)
- Smooth dimming, flicker free operation
- Flicker free with selectable PWM
- Rotary, key, DMX control of dimmer
- Silent operation for studio and theatre use
- Aluminum housing, robust construction


Application:

- Broadcast, HD studio
- Theatre, chruch
- Fashion show
- Museum
- Exhibition lighting



Accessories:




Gel frame



Gobo holder (opt.)

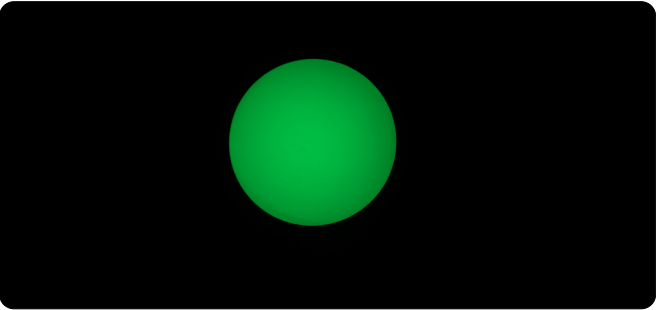

Color Temperature Channel-CRI

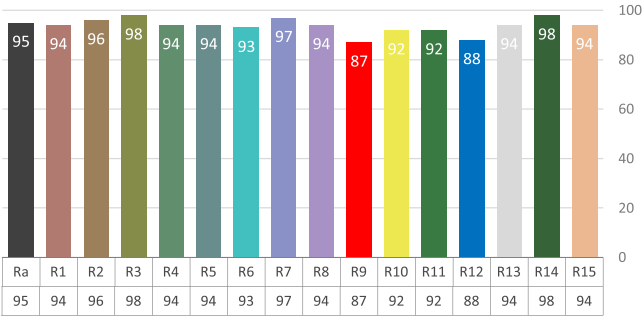

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	350W LED
Color:	RGBALC(amber, lime, cyan)
Fixed lens:	19°, 26°, 36°, 50°
Color Rendition:	CRI, TLCI≥95(CT channel), CRI 85(full on)
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out(5-pin opt.)
Control channels:	2/8/12
Control mode:	Rotary, DMX, RDM

Housing:	Color black, aluminum
Size:	700 x 270 x 263mm
Package(carton):	740 x 340 x 320mm
N.W.:	8.6 kg
G.W.:	10 kg
Accessories(incl.):	Power cable, Gel frame, Safety rope
Accessories(opt.):	Gobo holder, Clamp
Environment:	IP20



Reborn 200 is a LED retrofit for Source 4 profile. Upgrade your source 4 profile in just seconds. Features high CRI, bright output and low heat, energy save, clean and even light field, RDM function, long life LED, LCD display, XLR in & out, 100-240V worldwide voltage.

Key features:


- 200W LED light source, equivalent of 575W lamp
- Color temperature 3200K, 4000K, 5600K optional
- CRI≥98, R9≥93, TLCI 98 (3200K), CRI 90+ (4000K, 5600K)
- 3-pin XLR in & out signal connection(5-pin optional)
- Dimmer curves selectable
- Studio mode for super silent operation
- Wide voltage range 100-240V
- Dimmer frequency 1.2 - 20.0KHz
- Smooth dimming, video flicker free
- LCD display, user friendly interface
- Easy to setup, seconds to upgrade
- Intelligent temperature control, silent operation

Application:

- Broadcast, HD studio
- Theatre, church
- Fashion show
- Museum




Scan for video

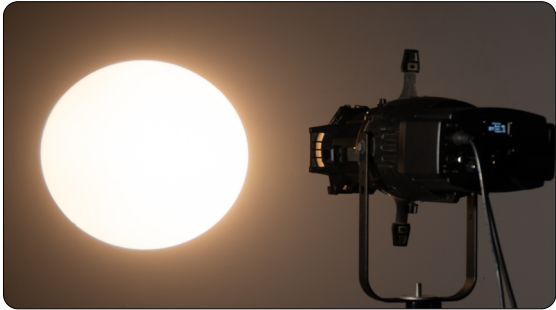


Reborn 200

Source 4 LED retrofits


Photometric

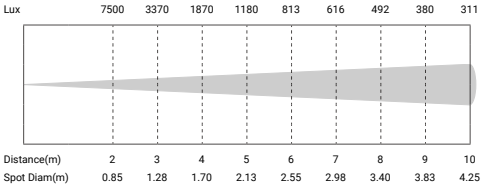

26° - 3200K

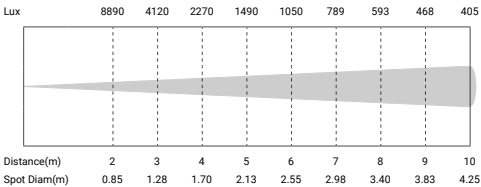


26° - 4000K

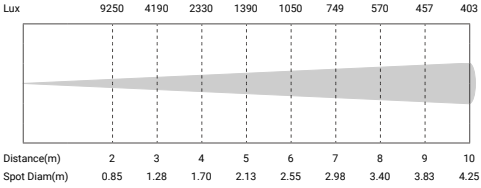

26° - 5600K


Color Rendition

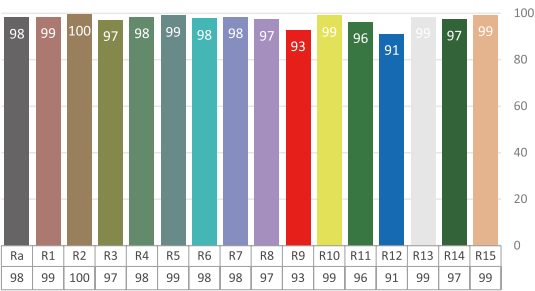


3200K

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	200W COB LED
Color temperature:	3200K, 4000K, 5600K optional
Color Rendition:	CRI 98, R9≥93, TLCI 98(3200K), CRI 90+ (4000K, 5600K)
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	1
Dimmer frequency:	1.2 KHz, 1.6 KHz, 2.4 KHz, 4.0 KHz, 6.0 KHz, 20.0 KHz
Dimmer curves:	Standard, Stage, TV, Architecture, Theatre, Studio(fan mode), Custom
Control mode:	DMX, RDM
Housing:	Color black, Die-cast aluminum
Size:	195 x 141 x186 mm
N.W.:	3 kg
Accessories(incl.):	Power cable, fix bolt
Environment:	IP20

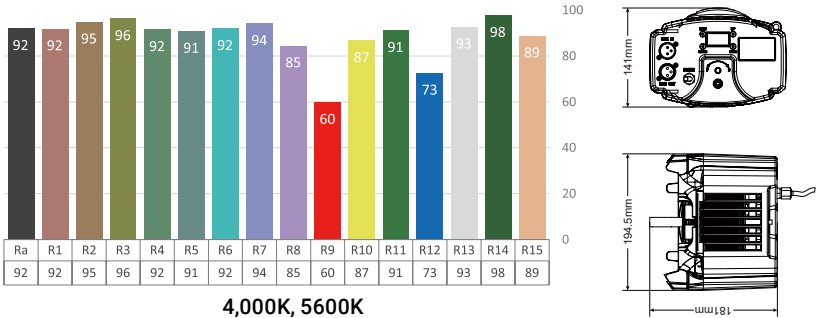

4,000K, 5600K






Reborn 200T is a tunable white LED retrofit for Source 4 profile. Upgrade your source 4 profile in just seconds. Features high CRI, bright output and low heat, energy save, clean and even light field, RDM function, long life LED, LCD display, XLR in & out, 100-240V worldwide voltage.

Key features:

- 200W tunable LED
- Source 4 LED retrofits tunable white
- Color temperature 2200K-7000K adjustable
- 3-pin XLR in & out signal connection(5 pin optional)
- Dimmer curves selectable
- Studio mode for super silent operation
- Wide voltage range 100-240V
- Dimmer frequency 1.20-24.00KHz adjustable
- Smooth dimming, video flicker free
- LCD display, user friendly interface
- Easy to setup, seconds to upgrade
- Intelligent temperature control, silent operation

Application:




- Broadcast, HD studio
- Theatre, chrucl
- Fashion show
- Museum

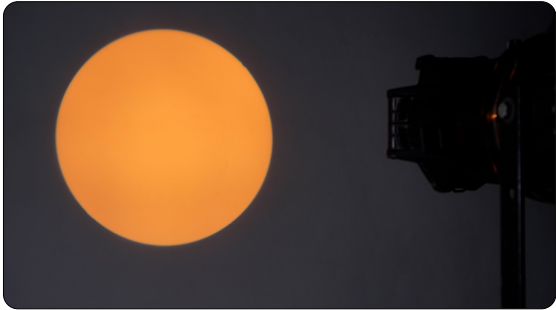



Reborn 200T

Source 4 LED retrofits

Photometric

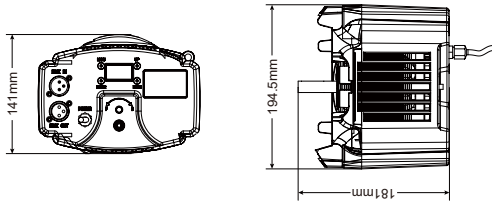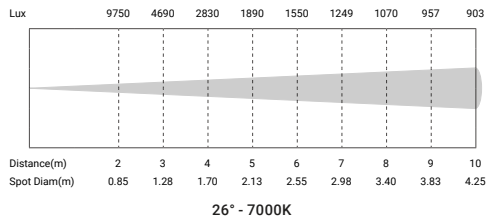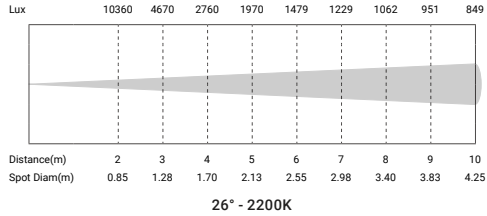

Color Rendition

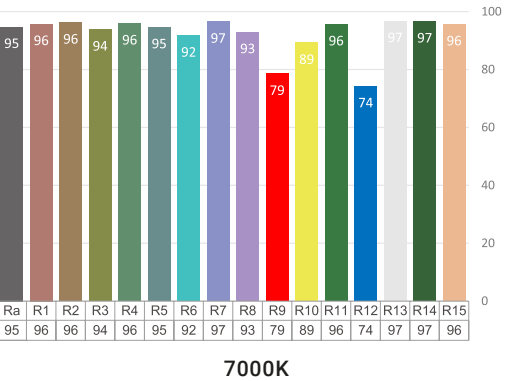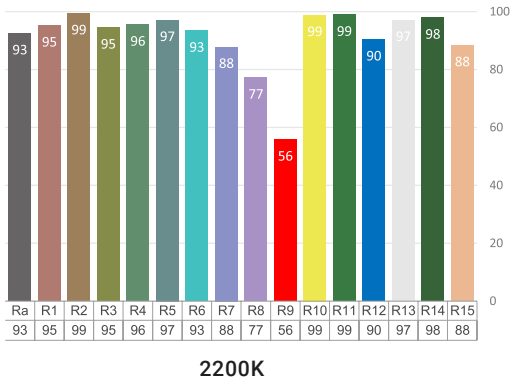

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	200W tunable LED
Color temperature:	2200K-7000K
Color Rendition:	CRI 94,TLCI 96
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	2/5
Dimmer frequency:	1.20-24.00KHz adjustable
Dimmer curves:	Standard, Stage, TV, Architecture, Theatre, Studio(fan mode), Custom
Control mode:	DMX, RDM
Housing:	Color black, Die-cast aluminum
Size:	195 x 141 x186 mm
N.W.:	3 kg
Accessories(incl.):	Power cable, fix bolt
Environment:	IP20



Reborn 1000C is a RGBV LED retrofit for Source 4 profile spot. Upgrade your source 4 profile in just seconds. Featuring 1000W RGBV four color LED source, each color with 250Watt, even and flat color mixing, high CRI, low power consumption. RDM function, long life LED, LCD display, XLR in & out, 100-240V worldwide voltage.


Key features:

- 1000W RGBV LED(V=WW), each color 250Watt
- High power LED, bright output
- Even and flat color mixing
- Color temperature 3200K - 5600K adjustable
- 3-pin XLR in & out signal connection
- High CRI, TLCI
- Studio mode for super silent operation
- Wide voltage range 100-240V
- Dimmer frequency 1.20-24.00KHz adjustable
- Smooth dimming, video flicker free
- LCD display, user friendly interface
- Easy to setup, seconds to upgrade
- Intelligent temperature control, silent operation

Application:


- Broadcast, HD studio
- Theatre, chruch
- Museum

Reborn 1000C
Source 4 LED retrofits RGBV

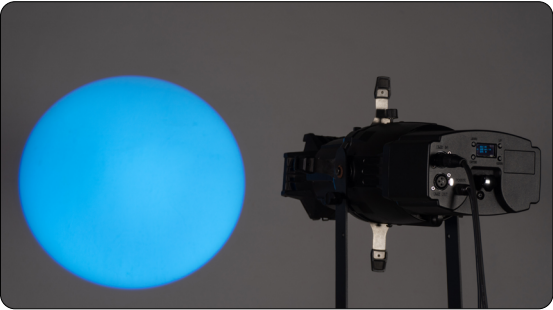


Photometric

R(lx)	4990	1400	372	179	82	50	32	21	18	13
G(lx)	6630	1930	789	445	294	192	138	105	83	72
B(lx)	1180	307	126	73	46	32	24	18	14	12
V(lx)	9830	2510	1040	532	353	228	172	122	95	83
Full on(lx)	5300	1470	602	309	205	136	98	71	57	48

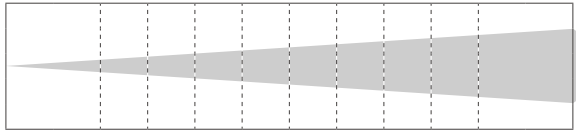

Distance(m)	1	2	3	4	5	6	7	8	9	10
Spot Diam(m)	0.87	1.31	1.74	2.18	2.61	3.05	3.48	3.92	4.35	

26°

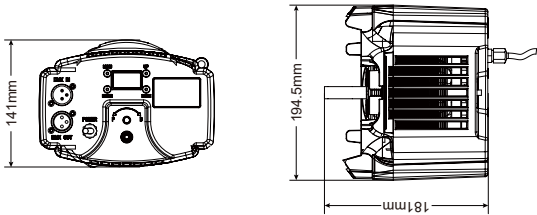

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	1000W RGBV LED
Color temperature:	3200K- 5600K tunable
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	1/4/6/10
Dimmer frequency:	1.20-24.00KHz adjustable
Dimmer curves:	Standard, Stage, TV, Architecture, Theatre, Studio(fan mode), Custom
Control mode:	DMX, RDM
Housing:	Color black, Die-cast aluminum
Size:	195 x 141 x186 mm
N.W.:	3 kg
Accessories(incl.):	Power cable, Safety cable, fix bolt
Environment:	IP20



3200K or 5600K

RDM

Control

COB

40W LED



ZOOM



Flicker Free

98

TLCI

95

CRI

Designed for short distance wash. The mini Fresnel 40Z is a compact LED fresnel and powered by 40W 3200K tungsten or 5600K daylight LED. Featuring 25-80° zoom, 95CRI, 90 R9, rotary control of dimmer. It deliver a smooth, soft flat field of light. Barn door included for the shape of the light.


Key features:

- 40W COB white LED
- CRI 95, R9≥90, TLCI 98, CQS 94
- 25° - 80° manual zoom
- Smooth dimming, flicker free
- Super compact, easy for set up
- Rotary, key, DMX control of dimmer
- DMX-RDM compliant
- 4-leaf rotatable barndoor included
- Track mount version selectable

Application:

- News interview
- Micro film shooting
- Small event
- Wedding shooting
- Exhibition lighting


Accessories:




Mini Fresnel 40Z

WW or CW


40W LED fresnel zoom



Photometric


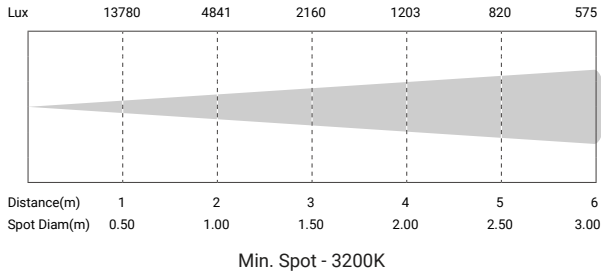


Color Rendition

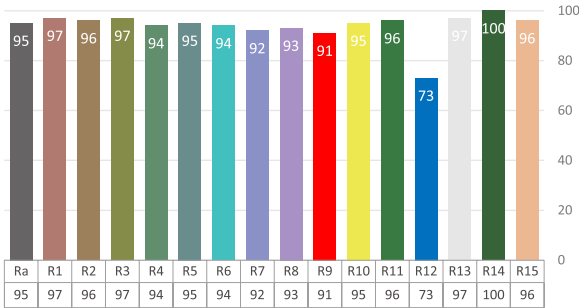

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	40W COB LED
Color temperature:	3200K or 5600K
Zoom range:	25° - 80° manual zoom
Color Rendition:	CRI 95, R9≥90, TLCI 98, CQS 94
Power connection:	PowerCON in
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	1/2/3/4
Control mode:	DMX, RDM, Rotary
Dimmer speed:	4 grade

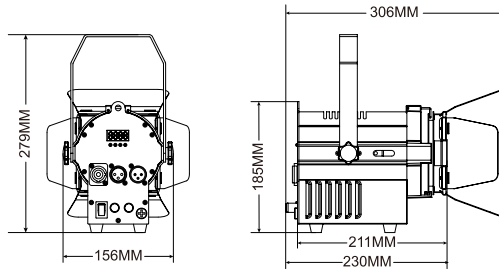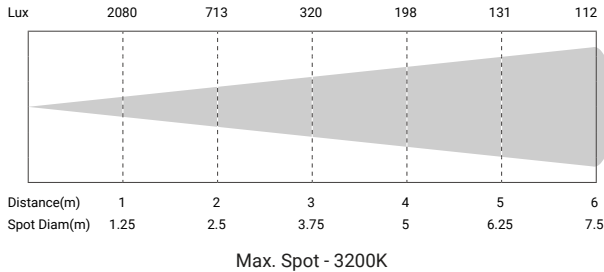

Housing:	Colour black, Aluminum
Size:	230 x 156 x 279mm
Package(carton):	335 x 218 x 220mm
N.W.:	2.2 kg(barn door incl.)
G.W.:	2.8 kg
Accessories(incl.):	Power cable, barn door, Gel frame
Accessories(opt.):	Clamp, Safety rope
Compliance:	CE
Environment:	IP20

2700K - 6500K

RDM
Control

COB
50W+50W

ZOOM

Flicker Free

98
TLCI

95
CRI

The Mini Fresnel 50TZ is a compact LED fresnel and powered by 50W warm white and 50W cold white tunable LED. 25° ~ 80° zoom, 95CRI, 90 R9, rotary control of dimmer. It deliver a smooth, soft flat field of light. Barn door included for the shape of the light.


Key features:

- 50W warm white + 50W cool white
- 2700K ~ 6500K tunable
- CRI 95, R9≥90, TLCI 98, CQS 96
- 25° - 80° manual zoom
- Smooth dimming, flicker free
- Super compact, easy for set up
- Rotary, key, DMX control of dimmer
- DMX-RDM compliant
- 4-leaf rotatable barndoor included
- Track mount version selectable

Application:


- News interview
- Micro film shooting
- Small event
- Wedding shooting
- Exhibition lighting

Accessories:




Mini Fresnel 50TZ


50W tunable fresnel zoom



Photometric

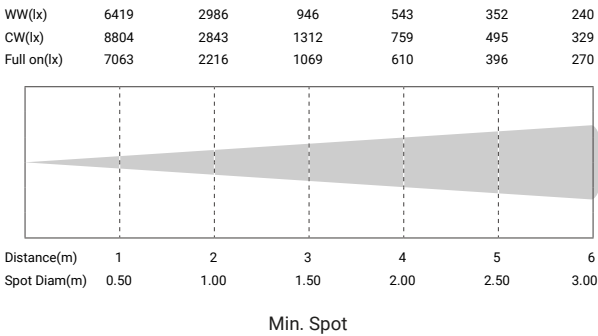


Color Rendition

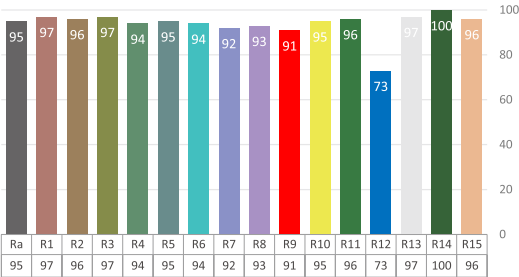


Technical Data


Power supply:	AC100 - 240V, 50/60Hz
Light source:	50W WW + 50W CW
Color temperature:	2700K ~ 6500K tunable
Zoom range:	25° - 80° manual zoom
Color Rendition:	CRI 95, R9≥90, TLCI 98, CQS 96
Power connection:	PowerCON in
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	1/2/3/5
Control mode:	DMX, RDM, Rotary

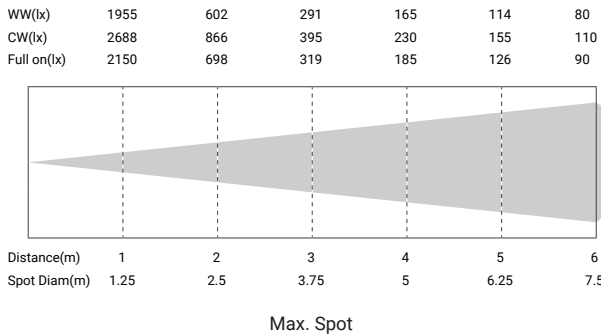

Spectrum

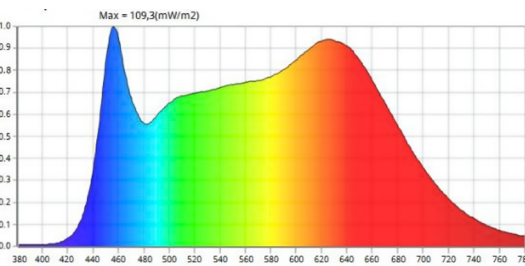

Housing:	Colour black, Aluminum
Size:	230 x 156 x 279mm
Package(carton):	335 x 218 x 220mm
N.W.:	2.2 kg(barn door incl.)
G.W.:	2.8 kg
Accessories(incl.):	Power cable, barn door, Gel frame
Accessories(opt.):	Clamp, Safety rope
Compliance:	CE
Environment:	IP20



Mini Fresnel 40CZ

40W RGBL LED fresnel zoom

Mini Fresnel 40CZ is a portable LED fresnel and powered by 40W RGBL LED. Featuring 25-80° zoom, even color mixing, 3000K ~ 8000 color temp. It deliver a smooth, soft flat field of light. Barn door included for the shape of the light.


Key features:

- 40W LED(40W R+40W G+40W B+40W L)
- RGBW flat and even color mixing
- 25° - 80° manual zoom
- Smooth dimming, flicker free
- Super compact, easy for set up
- Rotary, key, DMX control of dimmer
- DMX-RDM compliant, 4 dimmer modes
- 4-leaf rotatable barndoor included
- Track mount version selectable

Application:



- Small event
- Small theatre
- Stage wash

Accessories:



Photometric


R(lx)	273	125	72	43	36	26	23	17	13
G(lx)	620	295	170	108	83	63	58	41	33
B(lx)	151	82	52	33	27	17	15	11	9
W(lx)	740	328	199	132	95	75	69	53	37
Full on(lx)	438	207	120	75	60	43	37	29	25

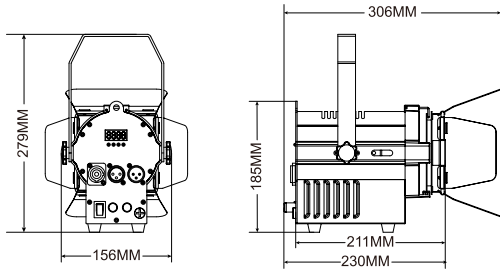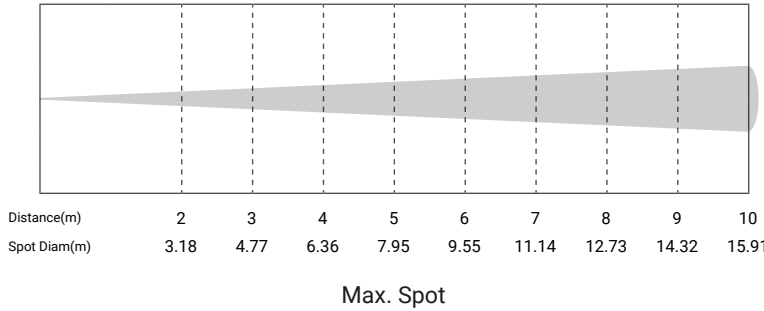

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	40W LED
LED color:	RGBL (RGBW version optional)
Color temperature:	3000K - 8000K
Zoom range:	25° - 80° manual zoom
Power connection:	PowerCON in
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	ARC.1(3CH), AR1.D(4CH), ARC.2(4CH), AR2.D(5CH), AR2.S(6CH), HSV(3CH), STAG(11CH)
Control mode:	DMX, RDM

Dimmer speed:	4 grade
Housing:	Colour black, Aluminum
Size:	230 x 156 x 279mm
Package(carton):	335 x 218 x 220mm
N.W.:	2.2 kg(barn door incl.)
G.W.:	2.8 kg
Accessories(incl.):	Power cable, barn door, Gel frame
Accessories(opt.):	Clamp, Safety rope
Compliance:	CE
Environment:	IP20





Event 120T is a successor for the popular Mini Fresnel 50T, the fixture keeps the same body size as Mini Fresnel 50T, and with 2 x power output. It is a 100 watt constant output LED source with tunable white color. Weight only 2.3kgs. It is a perfect product for places where the space is limited but powerful output is needed. Barndoor can be used for shape of light.


Key features:

- 100Watt WW + 100W CW COB white LED
- 2700K - 6000K tunable color temperature
- Average CRI≥95, R9 90+
- Soft and even wash effect
- 25° - 60° manual zoom
- Smooth dimming, flicker free
- Knob, DMX and RDM controls
- Light weight, super compact size
- Powercon in and out connection


Application:

- Broadcast, HD studio
- Theatre, chruch
- Film shooting
- Museum
- Exhibition lighting

Accessories:



Barn door



Gel frame




Event 120T

100W tunable LED fresnel manual zoom

Photometric


WW(lx)	11500	3160	1370	764	494	336	247	194	152	135
CW(lx)	17400	4730	2070	1160	742	512	368	285	222	189
Full on(lx)	12800	3490	1530	863	556	383	278	216	169	146

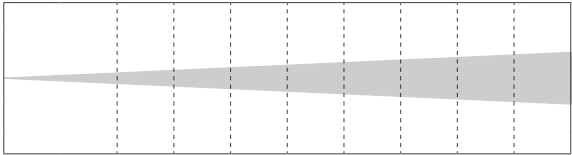

Distance(m)	1	2	3	4	5	6	7	8	9	10
Spot Diam(m)		0.89	1.33	1.77	2.22	2.66	3.10	3.55	3.99	4.43

Minimum Spot - 25°


Color Rendition - 4000K

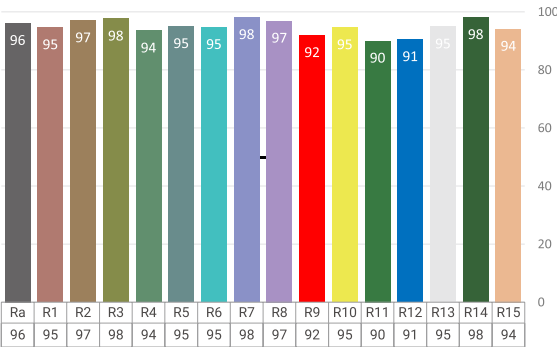

Technical Data


Power supply:	AC100-240V, 50/60Hz
Light source:	100Watt WW + 100W CW LED
Color temperature:	2700K - 6000K
Zoom range:	25° - 60° manual zoom
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5
Control mode:	Knob, DMX and RDM controls

WW(lx)	2150	580	261	152	101	74	56	44	35	29
CW(lx)	2860	788	351	205	136	100	76	59	46	38
Full on(lx)	2200	613	274	160	156	79	60	46	37	30

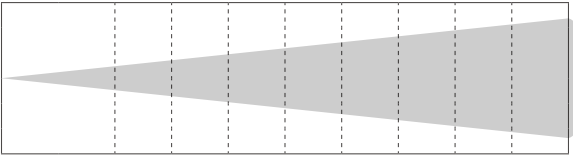

Distance(m)	1	2	3	4	5	6	7	8	9	10
Spot Diam(m)		3.13	4.70	6.27	7.83	9.40	10.97	12.53	14.10	15.67

Maximum Spot - 60°

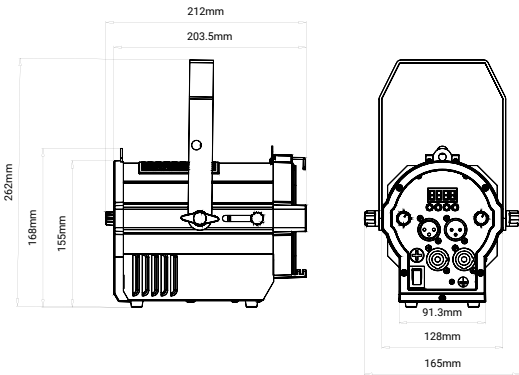

Dimmer speed:	4 grade
Housing:	Colour black, Aluminum
Size:	230 x 156 x 279mm
N.W.:	2.3kg(barn door included)
G.W.:	2.8kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Accessories(opt.):	Clamp
Environment:	IP20



Event 120C is a successor for the popular Mini Fresnel 40C, the fixture keeps the same body size as Mini Fresnel 40C, and with 2 x power output. It is a 250Watt LED source with RGBL color source. Weight only 2.3kgs. It is a perfect product for places where the space is limited but powerful output is needed. Barndoor can be used for shape of light.


Key features:

- 250Watt LED source, limit to 100W max output
- RGBL color mixing, each color 60 - 80W
- Soft and even wash effect
- 25° - 60° manual zoom
- Smooth dimming, flicker free
- Knob, DMX and RDM controls
- Light weight, super compact size
- Powercon in and out connection

Application:

- Broadcast, HD studio
- Theatre, chruch
- Film shooting
- Museum
- Exhibition lighting

Accessories:




Event 120C

100W RGBL LED fresnel manual zoom




Photometric

R (lx)	1360	598	362	229	148
G (lx)	3310	1470	878	565	368
B (lx)	500	222	131	83.8	53.8
L (lx)	2690	1180	676	427	277
Full on (lx)	1800	797	477	304	197

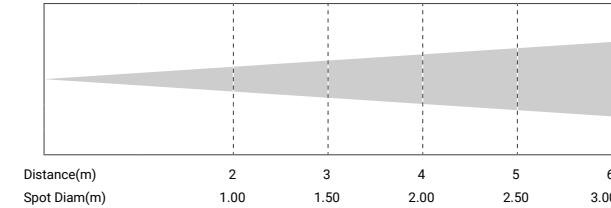


Min. Spot

R (lx)	223	98.8	60.9	39.9	25.9
G (lx)	541	246	154	101	68.7
B (lx)	81.4	36.5	22.8	15.8	9.9
L (lx)	406	183	115	75.8	50.7
Full on (lx)	285	129	80.6	53	36.1

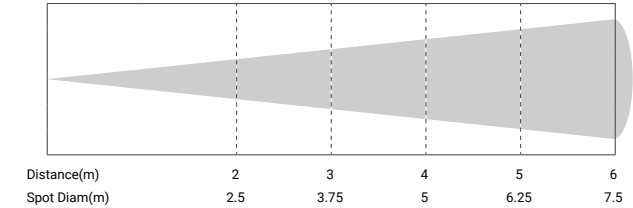

Max. Spot

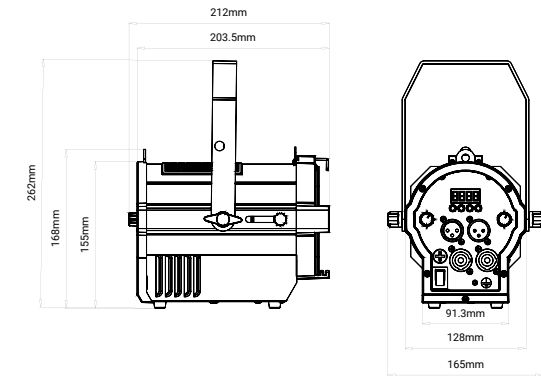

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	250Watt LED, 100W max power
Color:	RGBL
Zoom range:	25° - 60° manual zoom
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out
Control channels:	ARC.1(3CH), AR1.D(4CH), ARC.2(4CH), AR2.D(5CH), AR2.S(6CH), HSV(3CH), STAG(11CH)
Control mode:	Knob, DMX and RDM controls

Dimmer speed:	4 grade
Housing:	Colour black, Aluminum
Size:	230 x 156 x 279mm
N.W.:	2.3kg(barn door included)
G.W.:	2.8kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Accessories(opt.):	Clamp
Environment:	IP20



2700K - 6000K



40W LED



Flicker Free

92

CRI

88

TLCI

Art 50T Wash is a compact LED fresnel,10°-60° zoom, suitable for projection from different distances. Full aluminum housing. Color temperature adjustable from 2700K - 6000K. It's an idea product for art gallery, museum, shopping mall.

Key features:

- 40W WW + 40W CW constant output LED
- 2700K - 6000K adjustable
- High CRI over 92
- 10° - 60° manual zoom
- Full aluminum housing
- Smooth dimming, flicker free
- Compact body, easy to set up
- DMX control of dimmer
- RDM function available
- Front barrel innovative focusing
- Barndoor optional

Application:


- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant




Art 50T Wash

40W tunable LED fresnel

Photometric

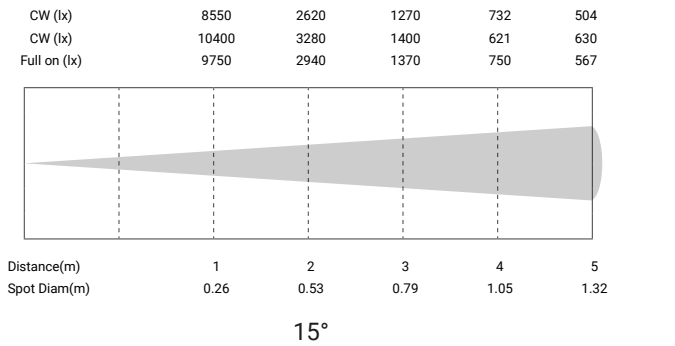


Color Rendition - 2700K

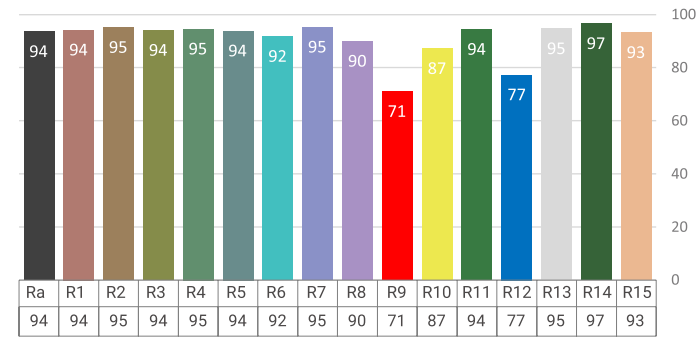

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	40W WW + 40W CW LED
Color temperature:	2700K - 6000K adjustable
Zoom range:	10° - 60°manual zoom
Color Rendition:	Avg. CRI 92
Power connection:	Power in
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5

Control mode:	DMX, RDM
Housing:	Color black, die-casting aluminum
Size:	258x140x90mm
G.W.:	1.3 kg
Accessories(incl.):	Power cable, safety rope
Accessories(opt.):	Barn door, Clamp
Environment:	IP20

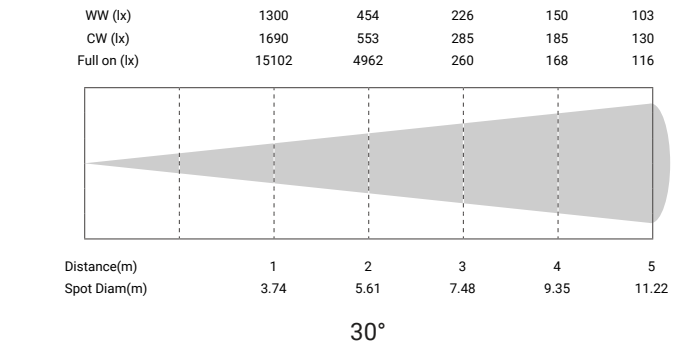



Art 50C Wash

50W RGBL LED fresnel zoom


Art 50C Wash is a RGBL LED fresnel light with 10°-60° zoom, suitable for projection for small exhibitions. Even and flat color mixing, full aluminum housing, super compact size, DMX function built in. It's an idea product for exhibitions, museum, shopping mall etc.

Key features:

- 50W max output, each color 25Watt
- RGBL color mixing
- 10° - 60° manual zoom
- Aluminum housing
- Smooth dimming, flicker free
- Compact body, easy to set up
- DMX control of dimmer
- RDM function available
- Front barrel innovative zoom
- Barndoor optional

Application:

- Museum
- Theatre, chruch
- Shopping mall
- Art gallery
- Restaurant

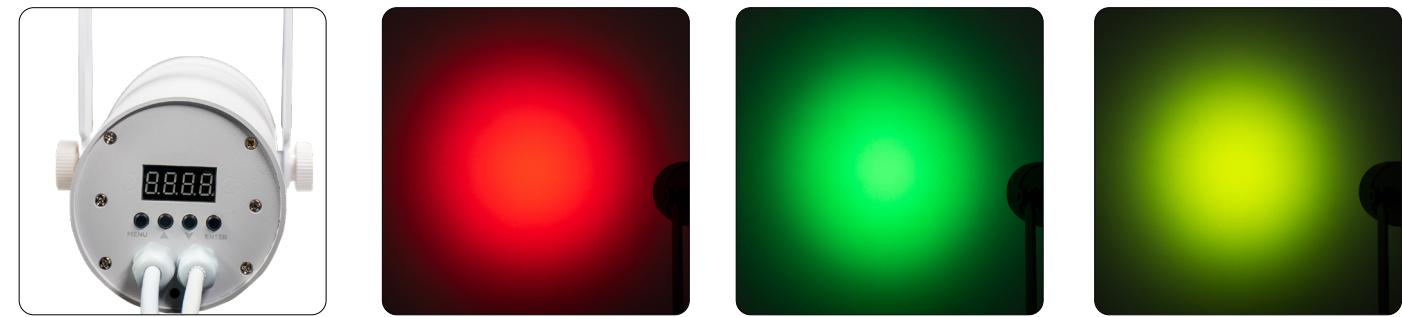

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	100W LED with 50W max output, each color 25Watt
Color mixing:	RGBL
Zoom range:	10° - 60°manual zoom
Power connection:	Power in
Signal connection:	3-pin XLR in & out
Control channels:	4/6/8

Control mode:	DMX, RDM
Housing:	Color black, aluminum
Size:	258 x 140 x 90mm
G.W.:	1.3 kg
Accessories(incl.):	Power cable, safety rope
Accessories(opt.):	Barn door, Clamp
Environment:	IP20

2700K - 6000K

RDM
Control

COB
100W LED

ZOOM

Flicker Free

96
TLCI

95
CRI

Event 100T

100W tunable white LED fresnel zoom

Event 100 Fresnel is a tunable white LED fresnel light with zoom. And a eco-nomic version of the CTC 100 Fresnel. The fixture comes with average high CRI over 95, TLCI over 96. Barndoor and color frame is included in delivery. The fixture is super compact for small exhibitions.


Key features:

- 100W COB white LED
- 2700K - 6000K color temperature
- Average CRI 95, TLCI 96
- 25° - 60° zoom lens, single side zoom
- Digital display with dual knob control
- Rotary, key, DMX control of dimmer
- Intelligent fan, silent operation for studio and theatre use
- Super compact body, only 2.5 kg, easy to install and setup
- Powercon TR1 in, DMX in & out

Application:

- Broadcast, HD studio
- Theatre, chruch
- Fashion show
- Museum
- Exhibition

Accessories:



barn door




Gel frame



Photometric


WW(lx)	3520	1500	906	610	428	334	270	227	181
CW(lx)	4930	2350	1260	860	603	465	380	313	269
Full on(lx)	3170	1660	816	552	388	300	247	199	171

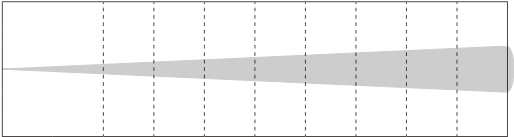

Distance(m)	2	3	4	5	6	7	8	9	10
Spot Diam(m)	0.60	0.90	1.20	1.49	1.79	2.09	2.39	2.69	2.99

Minimum Spot - 25°



WW(lx)	846	357	233	162	119	93	74	59	48
CW(lx)	1070	525	294	206	151	118	93	73	62
Full on(lx)	722	415	199	138	102	80	63	49	41

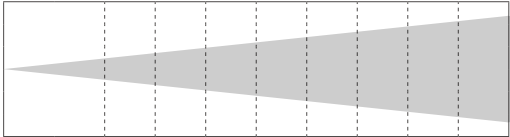

Distance(m)	2	3	4	5	6	7	8	9	10
Spot Diam(m)	2.53	3.80	5.07	6.33	7.60	8.87	10.13	11.40	12.67

Maximum Spot - 60°

Color Rendition 4000K

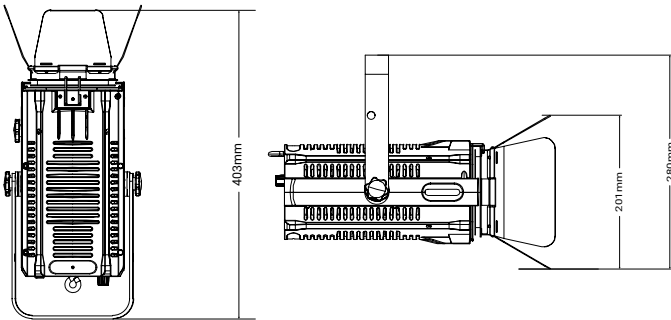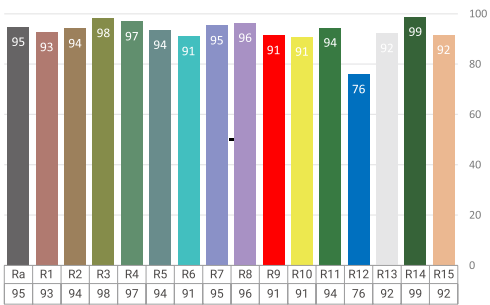

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	100W COB LED
Color temperature:	2700K - 6000K tunable
Zoom range:	25° - 60° manual zoom
Color Rendition:	CRI 95, TLCI 96(2900K)
Power connection:	PowerCON TR1 in
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5
Control mode:	Rotary, DMX, RDM

Housing:	Color black, engineering plastic
Size:	403 x 180 x 124mm
N.W.:	2.5 kg
G.W.:	4 kg
Accessories(incl.):	Power cable, barndoor, gel frame, Safety rope
Accessories(opt.):	Clamp, Y split powerr cable
Compliance:	Pending
Environment:	IP20

RDM
Support

ZOOM

Flicker Free

RGBL LED

EVENT 100C is a RGBL LED fresnel light with zoom. Uniform colour mixing, 25° - 60° manual zoom, compact and portable size, easy to install and use. Barndoor and color frame is included in delivery. The fixture is super compact for small exhibitions.


Key features:

- 100W max output (each color 55 - 65W)
- 25° - 60° zoom lens, single side zoom
- Flicker free with selectable PWM
- Rotary, key, DMX control of dimmer
- Intelligent fan, silent operation for studio and theatre use
- Super compact body, only 2.5 kg, easy to install and setup
- Powercon TR1 in, DMX in & out

Application:


- Theatre, chruch
- Fashion show
- Museum
- Exhibition

Accessories:




Event 100C

100W RGBL LED fresnel zoom



Photometric


R(lx)	4090	1070	504	300	167	125	88.4	73	59	48
G(lx)	10100	2950	1470	847	498	365	271	217	172	144
B(lx)	2040	566	283	163	95	70.2	50	40	32	27
L(lx)	11100	3090	1510	924	528	391	281	227	184	150
Full on(lx)	6050	1770	883	514	292	219	161	129	103	87

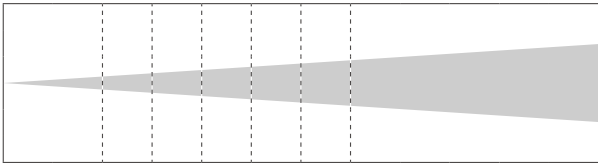

Distance(m)	1	2	3	4	5	6	7	8	9	10
Spot Diam(m)	0.60	0.90	1.20	1.49	1.79	2.09	2.39	2.69	2.99	



Min. Spot - 25°

R(lx)	744	206	100	55	36	26	21	16	12	10.2
G(lx)	1950	583	284	166	105	78.4	62	48	37.2	30.5
B(lx)	384	113	85	31	19.5	14	11.3	8.4	6.4	5.5
L (lx)	1990	599	289	166	106	77	62	47.6	36	30
Full on(lx)	1130	339	165	96	61	45	35.2	28	22	17.5

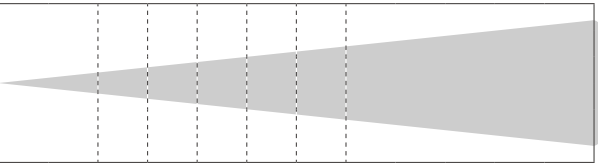

Distance(m)	1	2	3	4	5	6	7	8	9	10
Spot Diam(m)	2.53	3.80	5.07	6.33	7.60	8.87	10.13	11.40	12.67	

Max. Spot - 60°

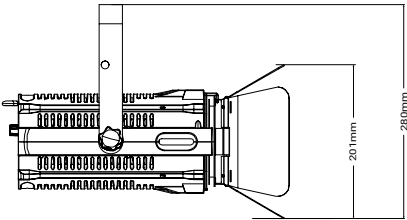

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	250W LED, 100W max output (55W R + 65W G + 65W B + 65W L)
Color:	RGBL
Zoom range:	25° - 60° manual zoom
Power connection:	PowerCON TR1 in
Signal connection:	3-pin XLR in & out
Control channels:	ARC.1(3CH), AR1.D(4CH), ARC.2(4CH), AR2D(5CH),AR2.S(6CH), HSV(3CH), STAG(11CH)
Control mode:	Rotary, DMX, RDM

Housing:	Color black, engineering plastic
Size:	403 x 180 x 124mm
N.W.:	2.5 kg
G.W.:	4 kg
Accessories(incl.):	Power cable, barndoor, gel frame, Safety rope
Accessories(opt.):	Clamp, Y split powerr cable
Compliance:	Pending
Environment:	IP20



Event 200T is a 200Watt WW + 200Watt CW powered LED fresnel with zoom function. The RDM-DMX compliant, 25 - 65 degree manual zoom along with it’s superior 95 CRI as well as super compact size make this fixture a good replacement for the traditional fresnels. A fixture designed for exhibitions, events.



Key features:

- 200Watt WW + 200W CW COB white LED
- 2700K - 6000K tunable color temperature
- Average R9≥95, TLCI 97
- Soft and even wash effect
- 25° - 65° manual zoom
- Smooth dimming, flicker free
- Knob, DMX and RDM controls
- Light weight, super compact size
- Powercon in out connection

Application:

- Broadcast, HD studio
- Theatre, chruch
- Film shooting
- Museum
- Exhibition lighting

Accessories:

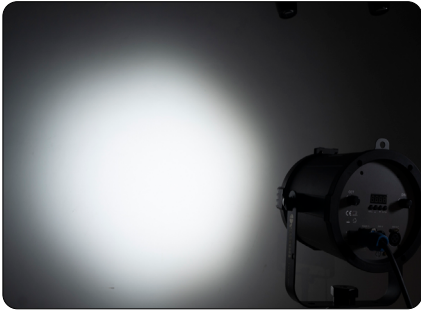


Event 200T


200W tunable LED fresnel manual zoom

Photometric

WW(lx)	23300	6950	2650	1620	1120
CW(lx)	33200	10100	3880	2340	1560
Full on(lx)	19300	5910	2280	1380	938

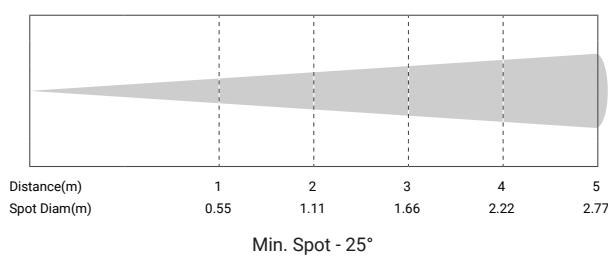



Color Rendition - 4000K

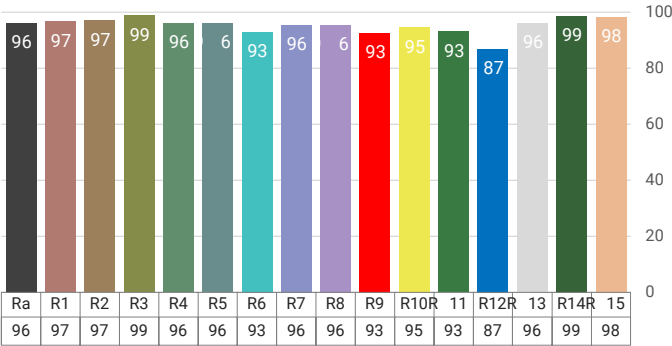

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	200Watt WW + 200W CW LED
Color temperature:	2700K - 6000K
Zoom range:	25° - 65° manual zoom
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5
Control mode:	Knob, DMX and RDM controls

WW(lx)	5970	1930	747	457	373
CW(lx)	9150	2800	1070	648	558
Full on(lx)	4680	1580	621	361	240

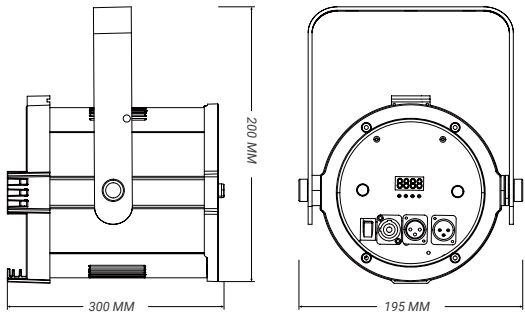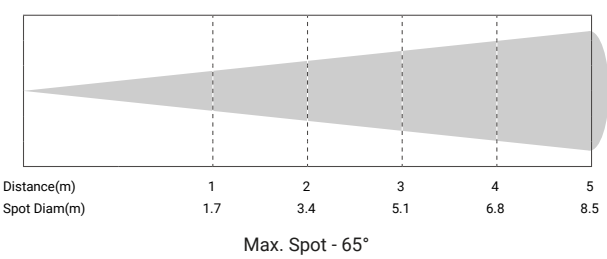

Dimmer speed:	4 grade
Housing:	Colour black, Aluminum
Size:	300 x 200 x 195mm
N.W.:	4.5 kg(barn door incl.)
G.W.:	6kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Accessories(opt.):	Clamp
Environment:	IP20



Event 200C is a 200Watt powered LED fresnel with zoom function.The RDM-DMX compliant, 25 - 65 degree manual zoom along with it's even and flat RGBW color mixing make this fixture a good replacement for the traditional fresnels and more color option compare to white LED fresnel.


Key features:

- 200Watt LED source
- RGBL color mixing
- Soft and even wash effect
- 25° - 65° manual zoom
- Smooth dimming, flicker free
- DMX and RDM controls
- Light weight, super compact size
- Barndoor included for shape of light
- Powercon in connection

Application:

- Theatre, chruch
- Film shooting
- Exhibition lighting

Accessories:



Event 200C


200W RGBL LED fresnel manual zoom



*No knob control for Event 200C


Photometric

R(lx)	594	243	134	108	71	55	44	40	32
G(lx)	966	442	227	181	101	93	79	64	52
B(lx)	209	93	52	42	30	26	22	19	17
W(lx)	1190	524	275	215	149	117	92	75	39
Full on(lx)	2780	1090	631	491	330	256	195	164	109

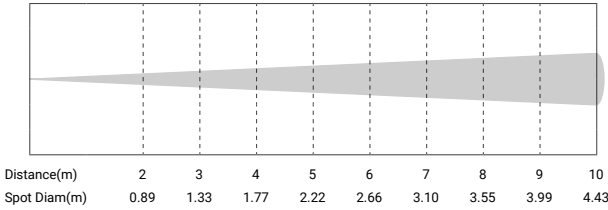


Minimum Spot

R(lx)	204	89	56	45	33	27	22.3	18.4	17.4
G(lx)	372	160	99	76	57	44	36	29	26
B(lx)	78	37	25	19	16	15	13.6	12	11
W(lx)	431	188	116	90	65	50	41	35	29
Full on(lx)	1000	434	355	201	142	104	84	65	59

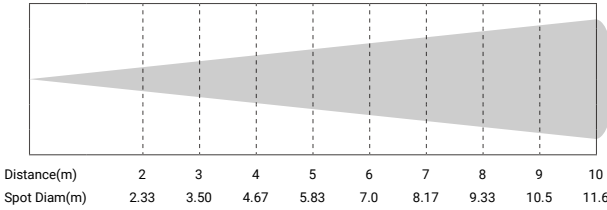

Maximum Spot

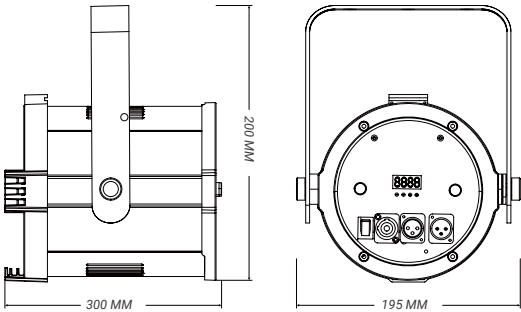

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	200Watt LED
Color mixing:	RGBL (RGBW verrsion optional)
Zoom range:	25° - 65° manual zoom
Power connection:	PowerCON in
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	ARC.1(3CH), AR1.D(4CH), ARC.2(4CH), AR2.D(5CH), AR2.S(6CH), HSV(3CH), STAG(11CH)
Control mode:	DMX and RDM controls

Dimmer speed:	4 grade
Housing:	Colour black, Aluminum
Size:	300 x 200 x 195mm
N.W.:	4.5 kg(barn door incl.)
G.W.:	6kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Accessories(opt.):	Clamp
Environment:	IP20



Event 300T is a 300Watt WW + 300Watt CW powered LED fresnel with zoom function. The RDM-DMX compliant, 25 - 50 degree manual zoom along with it’s superior 90+ CRI as well as super compact size make this fixture a good replacement for the traditional fresnels, par lights. A fixture designed for exhibitions, events.


Key features:

- 300Watt WW + 300W CW LED
- 2700K - 6000K tunable color temperature
- Average CRI≥90
- Soft and even wash effect
- 25° - 50° manual zoom
- Smooth dimming, flicker free
- Knob, DMX and RDM controls
- Light weight, super compact size
- Super bright, 14000+ lm output
- Powercon in out connection

Application:

- Broadcast, HD studio
- Theatre, chruch
- Film shooting
- Museum
- Exhibition lighting

Accessories:





Barn door





Event 300T
300W tunable LED fresnel manual zoom

Photometric

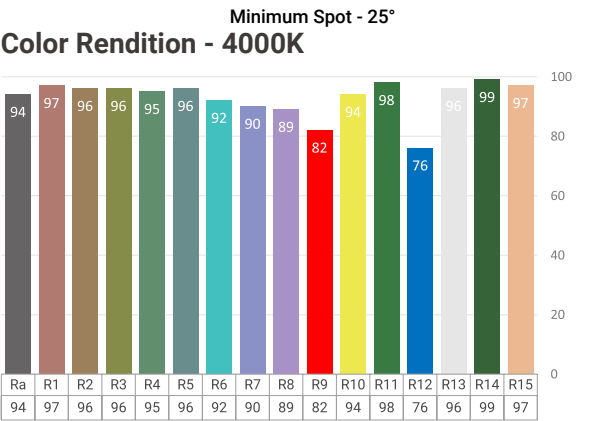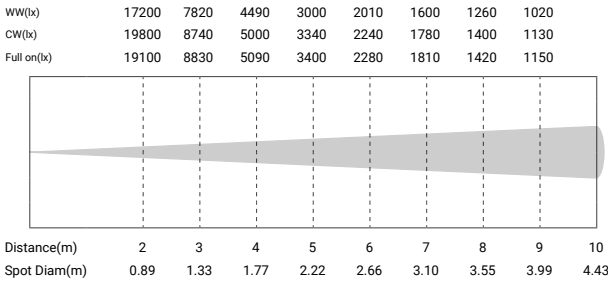

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	200Watt WW + 200W CW LED
Color temperature:	2700K - 6000K
Zoom range:	25° - 50° manual zoom
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5
Control mode:	Knob, DMX and RDM controls

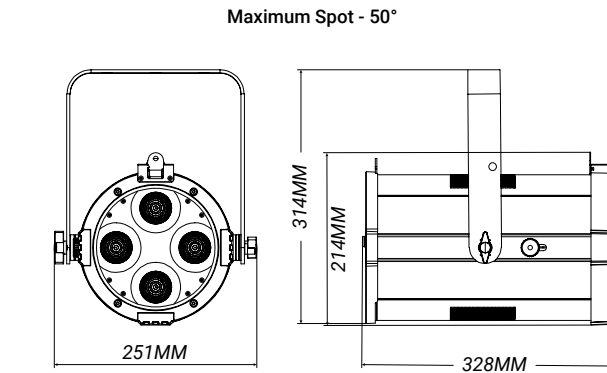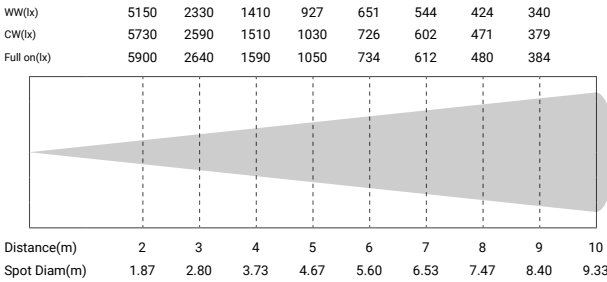

Dimmer speed:	4 grade
Housing:	Colour black, Aluminum
Size:	382 x 251 x 214 mm
N.W.:	5.4 kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Accessories(opt.):	Clamp
Environment:	IP20



Event 300C is a 300Watt RGBL LED fresnel with zoom function. The RDM-DMX compliant, 25 - 60 degree manual zoom along with it's even color mixing as well as super compact size make this fixture a good replacement for the traditional fresnels, par lights. A fixture designed for exhibitions, events.


Key features:

- 300Watt LED, each color 100Watt
- RGBL color mixing
- Average CRI≥90
- Soft and even wash effect
- 25° - 60° manual zoom
- Smooth dimming, flicker free
- Knob, DMX and RDM controls
- Light weight, super compact size
- Powercon in out connection



Application:

- Theatre, chruch
- Film shooting
- Museum
- Exhibition lighting

Accessories:



Barn door

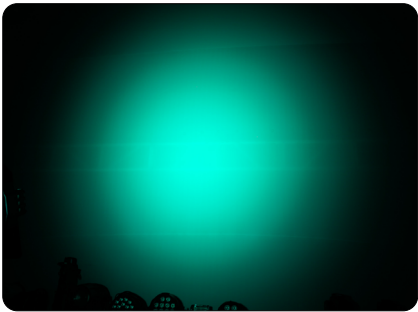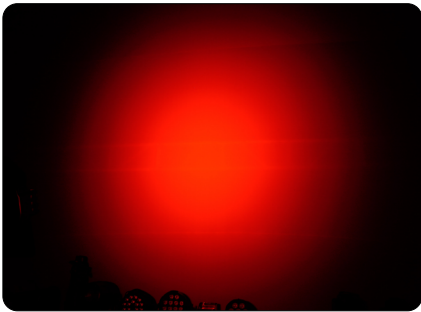


Event 300C

300W RGBL LED fresnel manual zoom



Technical Data

Power supply:	AC100-240V, 50/60Hz	Control mode:	Knob, DMX and RDM controls
Light source:	400W LED with 300W max output, each color 100Watt	Dimmer speed:	4 grade
Color:	RGBL	Housing:	Colour black, Aluminum
Zoom range:	25° - 60° manual zoom	Size:	382 x 251 x 214 mm
Power connection:	PowerCON in & out	N.W.:	5.4 kg
Signal connection:	3-pin XLR in & out	Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Control channels:	ARC.1(3CH), AR1.D(4CH), ARC.2(4CH), AR2.D(5CH), AR2.S(6CH), HSV(3CH), STAG(11CH)	Accessories(opt.):	Clamp
		Environment:	IP20

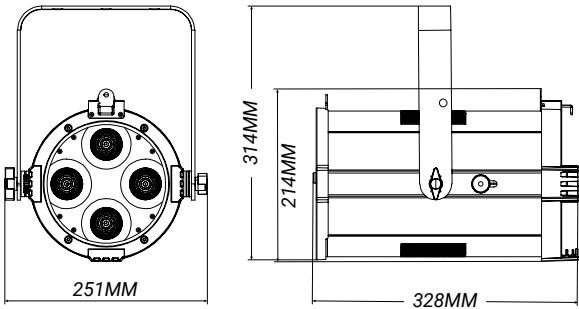

RDM

Control

COB

100W LED

ZOOM

Flicker Free

98

TLCI

97

CRI

Pioneer 100 Zoom

WW or CW

100W LED fresnel zoom

The Pioneer 100 Zoom is a 100W 3200K or 5600K powered LED fresnel with zoom function. The RDM-DMX compliant, 25 - 65 degree motorized zoom along with it's superior 97 CRI make this fixture a good replacement for the traditional fresnels.

Key features:

- 100W COB white LED
- 3200K or 5600K color temperature
- CRI 97, R9≥90, TLCI 98, CQS 94
- Soft and even wash effect
- 25° - 65° motorized zoom
- Smooth dimming, flicker free
- DMX, RDM control
- Dimmer curves selectable
- Silent operation for studio and theatre

Application:

- Broadcast, HD studio
- Theatre, chruch
- Film shooting
- Museum
- Exhibition lighting

Accessories:

Barn door

Gel frame

Photometric

Lux	8379	3843	2288	1452	1041	738	541	463	367
Distance(m)	2	3	4	5	6	7	8	9	10
Spot Diam(m)	0.9	1.3	1.8	2.2	2.7	3.1	3.5	4.0	4.4

Min. Spot - 25° 5600K

Color Rendition

Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97	98	97	93	97	97	94	97	97	90	90	96	82	97	95	97


Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	100W COB LED
Color temperature:	3200K or 5600K
Zoom range:	25° - 65° motorized zoom
Color Rendition:	CRI 97, R9≥90, TLCI 98, CQS 94
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	2/3/4/5
Control mode:	DMX and RDM
Dimmer speed:	4 grade

Lux	852	445	240	155	117	88	72	52	44
Distance(m)	2	3	4	5	6	7	8	9	10
Spot Diam(m)	2.6	3.9	5.2	6.5	7.8	9.1	10.4	11.7	13

Max. Spot - 65° 5600K

Housing:	Colour black, Aluminum
Size:	331 x 210 x 345.7mm
Package(carton):	448 x 338 x 400mm
N.W.:	6.6 kg(barn door incl.)
G.W.:	7.6 kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Accessories(opt.):	Clamp
Compliance:	CE
Environment:	IP20



Pioneer 100T Zoom

100W tunable LED fresnel zoom

The Pioneer 100T zoom is a 100Watt WW + 100Watt CW powered LED fresnel with zoom function. The RDM-DMX compliant, 25 - 65 degree manual zoom along with it's superior 95 CRI make this fixture a good replacement for the traditional fresnels.


Key features:

- 100Watt WW + 100W CW COB white LED
- 2700K - 6000K tunable color temperature
- Average CRI 95, TLCI 97
- Soft and even wash effect
- 25° - 65° moto zoom
- Smooth dimming, flicker free
- DMX, RDM control
- Dimmer curves selectable
- Silent operation for studio and theatre


Application:

- Broadcast, HD studio
- Theatre, chruch
- Film shooting
- Museum
- Exhibition lighting

Accessories:



Barn door




Gel frame




Photometric

WW(lx)	12000	3130	1520	812	204
CW(lx)	18200	4580	2020	1220	806
Full on(lx)	13000	3280	1390	882	573

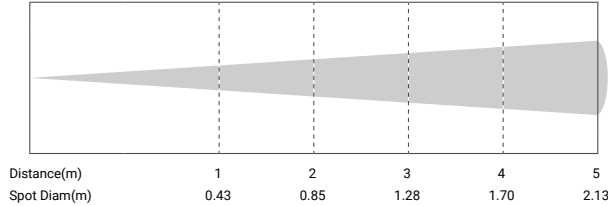

Min. Spot - 25°


Color Rendition - 2700K

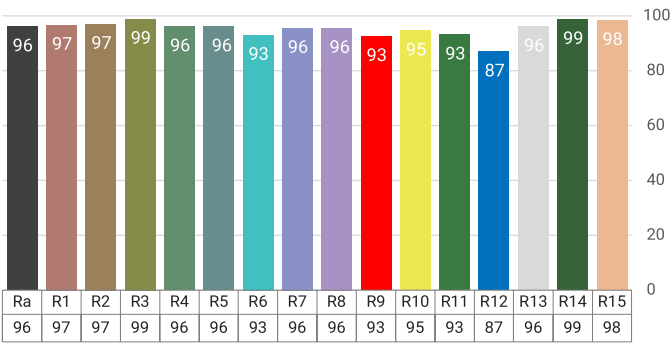


Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	100Watt WW + 100W CW LED
Color temperature:	2700K - 6000K
Zoom range:	25° - 65° motorized zoom
Color Rendition:	Average CRI 95, TLCI 97
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out
Control channels:	2/3/6/7 CH
Control mode:	DMX, RDM, Master-slave


WW(lx)	3800	1040	487	283	190
CW(lx)	5350	1400	643	382	262
Full on(lx)	4200	1050	467	289	195

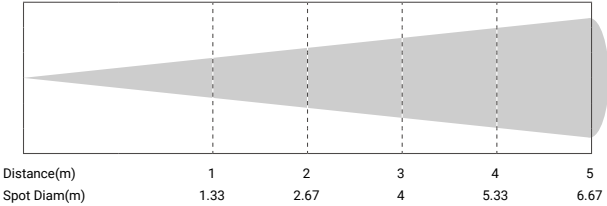

Max. Spot - 65°

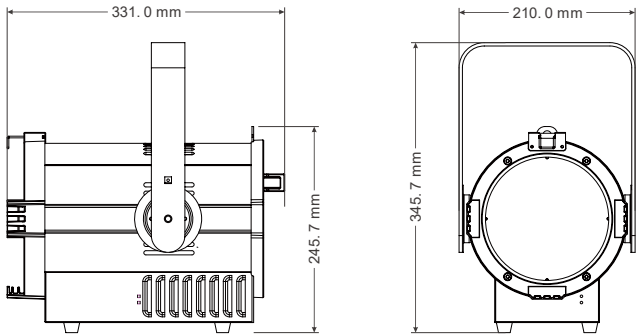

Housing:	Colour black, Aluminum
Package(carton):	448 x 338 x 400mm
Size:	331 x 210 x 345.7mm(13 x 8.3 x 13.6in)
N.W.:	6.6 kg(barn door incl.)
G.W.:	7 kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Accessories(opt.):	Clamp
Compliance:	Pending
Environment:	IP20



Pioneer 100C Zoom

100W LED RGBL fresnel zoom

The Pioneer 100C Zoom is a 100W RGBL LED fresnel with zoom function. The RDM-DMX compliant, 25 - 65 degree motorized zoom along with it's flat and even make this fixture a good replacement for the traditional fresnels.



Key features:

- 100W power LED
- RGBL color mixing
- Soft and even wash effect
- 25° - 65° motorized zoom
- Smooth dimming, flicker free
- DMX, RDM control
- Dimmer curves selectable
- Silent operation for studio and theatre

Application:


- Theatre, chruuch
- Film shooting
- Stage wash

Accessories:




Photometric

R(lx)	2699	378	193	129	98	75	55	42	34
G(lx)	1080	520	273	179	134	112	78	64	51
B(lx)	1289	139	74	48	34	27	18	14	11
W(lx)	1750	812	435	287	199	164	109	82	69
Full on(lx)	3730	780	665	608	433	315	275	199	167

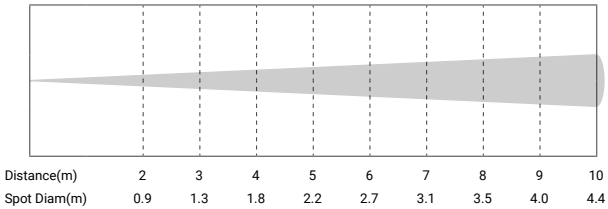

Min. Spot - 25° 5600K

R(lx)	120	64	32	26	19	15	10	7	5
G(lx)	175	86	47	36	27	20	13	10	8
B(lx)	48	28	16	12	7	5	4	3	2
W(lx)	274	125	69	57	42	32	17	14	11
Full on(lx)	585	275	156	102	87	66	48	35	27

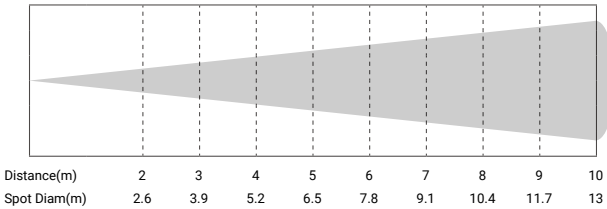

Max. Spot - 65° 5600K

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	100W LED
Color mixing:	RGBL (RGBW version optional)
Zoom range:	25° - 65° motorized zoom
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	ARC.1(3CH), AR1.D(4CH), ARC.2(4CH), AR2.D(5CH), AR2.S(6CH), HSV(3CH), STAG(12CH)
Control mode:	DMX, RDM, Auto
Dimmer speed:	4 grade

Housing:	Colour black, Aluminum
Size:	331 x 210 x 345.7mm
Package(carton):	448 x 338 x 400mm
N.W.:	6.6 kg(barn door incl.)
G.W.:	7.6 kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Accessories(opt.):	Clamp
Compliance:	CE
Environment:	IP20



3200K or 5600K



RDM
Control



COB
200W LED



ZOOM



Flicker Free

98
TLCI

96
CRI

The Pioneer 200 Zoom is a 200W 3200K or 5600K powered LED fresnel with zoom function. The RDM-DMX compliant, 15 - 60 degree motorized zoom along with it's superior 96 CRI make this fixture a good replacement for the traditional fresnels.


Key features:

- 200W COB white LED
- 3200K or 5600K color temperature
- CRI 96, R9≥90, TLCI up to 98
- Soft and even wash effect
- 15° - 60° motorized zoom
- Smooth dimming
- Video flicker free
- DMX, RDM control
- Dimmer modes selectable
- Intelligent fan, silent operation


Application:

- Broadcast, HD studio
- Theatre, churuch
- Film shooting
- Museum
- Exhibition lighting

Accessories:



Barn door



Gel frame


Pioneer 200 Zoom

WW or CW


200W LED fresnel zoom



Photometric



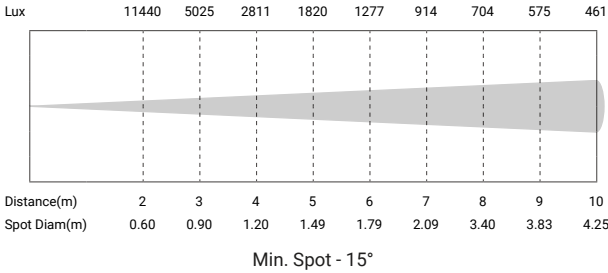


Color Rendition

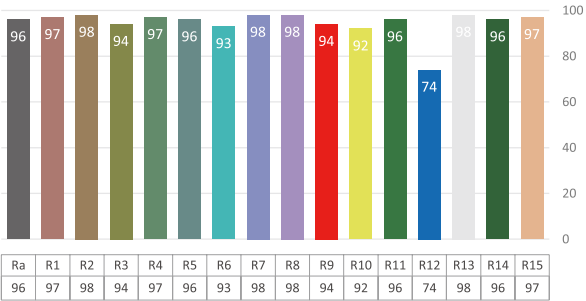


Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	200W COB LED
Color temperature:	3200K or 5600K
Zoom range:	15° - 60° motorized zoom
Color Rendition:	CRI 96, R9≥90, TLCI 98, CQS 94
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	2/3/4/5
Control mode:	DMX, RDM
Dimmer speed:	4 grade

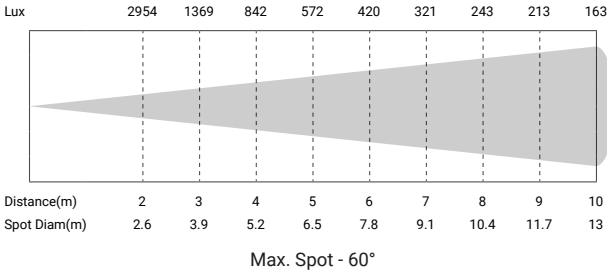

Housing:	Colour black, Aluminum
Size:	315 x 296 x 330mm
Package(carton):	445 x 352 x 360mm
N.W.:	8 kg(barn door incl.)
G.W.:	9.8 kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Accessories(opt.):	Clamp
Compliance:	CE
Environment:	IP20



Pioneer 200C Zoom

200W RGBL LED fresnel zoom

The Pioneer 200C Zoom is a 200W RGBL powered LED fresnel with zoom function. The RDM-DMX compliant, 15 - 60 degree motorized zoom along with it's superior color mixing make this fixture a good replacement for the traditional fresnels.


Key features:

- 200W LED
- RGBL perfect color mixing
- Soft and even wash effect
- 15° - 60° motorized zoom
- Smooth dimming
- Video flicker free
- DMX, RDM control
- Dimmer modes selectable
- Intelligent fan, silent operation

Application:


- Theatre, chrucl
- Stage wash
- Exhibition lighting

Accessories:




Photometric

R(lx)	852	398	207	137	91	67	49	39	32
G(lx)	1755	764	441	273	192	137	103	76	67
B(lx)	456	176	105	64	44	32	23	14	12
W(lx)	2241	980	564	360	247	183	129	104	82
Full on(lx)	6139	2308	1276	811	565	412	301	241	206

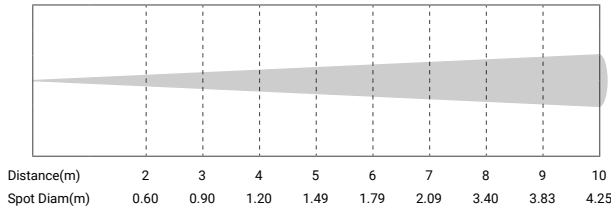


Min. Spot - 15°




Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	200W LED
Color mixing:	RGBL (RGBW version optiional)
Color temperature:	3000K ~ 8000K
Zoom range:	15° - 60° motorized zoom
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	ARC.1(3CH), AR1.D(4CH), ARC.2(4CH), AR2.D(5CH), AR2.S(6CH), HSV(3CH), STAG(12CH)
Control mode:	DMX, RDM, Auto
Dimmer speed:	4 grade

R(lx)	269	108	62	40	29	21	18	14	10
G(lx)	542	238	132	84	62	46	35	29	22
B(lx)	113	54	30	20	11	7	6	5	4
W(lx)	695	295	172	106	81	56	49	39	33
Full on(lx)	1367	689	395	249	180	167	108	94	76

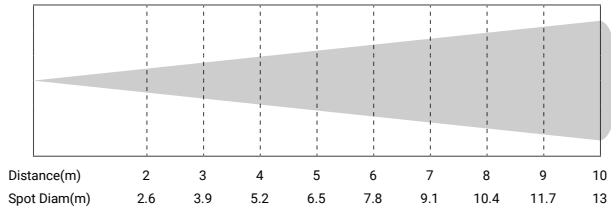

Max. Spot - 60°



Housing:	Colour black, Aluminum
Size:	315 x 296 x 330mm
Package(carton):	445 x 352 x 360mm
N.W.:	8 kg(barn door incl.)
G.W.:	9.8 kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Accessories(opt.):	Clamp
Compliance:	CE
Environment:	IP20



3200K or 5600K



RDM
Control



COB
200W LED



ZOOM



Flicker Free

98
TLCI

97
CRI

The Pioneer 200 PRO is a 200W 3200K or 5600K powered LED fresnel with zoom function. The RDM-DMX compliant, degree motorized zoom along with it's superior 97+ CRI make this fixture a good replacement for the traditional fresnels. *Pioneer 200 Pro is both smaller and brighter than Pioneer 200 Zoom.*

Key features:

- 200W COB white LED
- 30% brighter than the former Pioneer 200
- 3200K or 5600K color temperature
- CRI 97, R9≥90, TLCI up to 98
- Soft and even wash effect
- 10 - 55° motorized zoom
- Smooth dimming
- Dimmer frequency 1.2 - 24.0KHz
- DMX, RDM control
- Dimmer modes selectable
- Intelligent fan, silent operation

Application:

- Broadcast, HD studio
- Theatre, chrucl
- Film shooting
- Museum
- Exhibition lighting

Accessories:



Barn door



Gel frame





Pioneer 200 Pro

WW or CW

200W LED fresnel zoom



Photometric

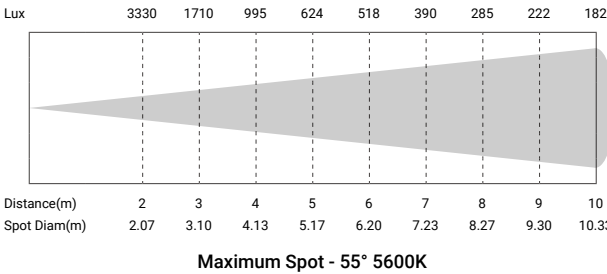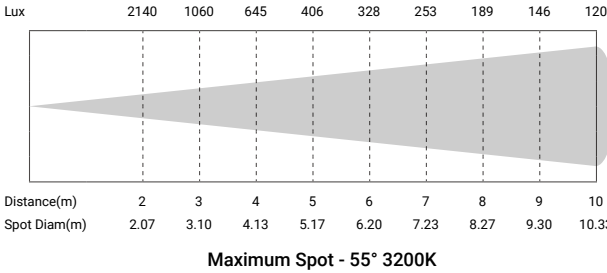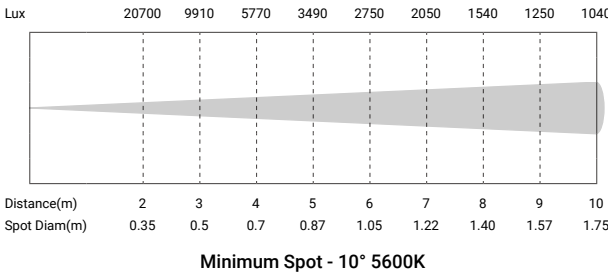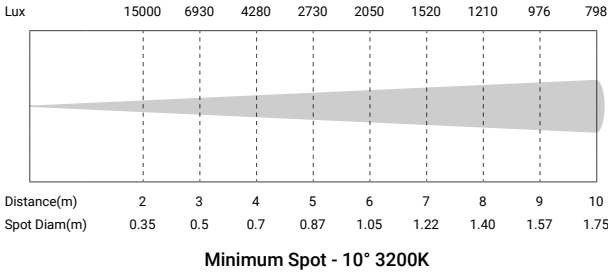

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	200W COB LED
Color temperature:	3200K or 5600K
Zoom range:	10° - 55° motorized zoom
Color Rendition:	CRI 98, R9≥94, TLCI 98(3200K) CRI 97, R9≥90, TLCI 97(5600K)
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in&out(5-pin optional)
Control channels:	1/2/3/4
Control mode:	DMX, RDM

Dimmer speed:	4 grade
Housing:	Colour black, Aluminum
Size:	315 x 296 x 330mm
Package(carton):	445 x 352 x 360mm
N.W.:	8 kg(barn door incl.)
G.W.:	9.8 kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Accessories(opt.):	Clamp
Compliance:	CE
Environment:	IP20

2700K - 6500K

RDM
Control

175W
tunable

ZOOM

 Flicker Free

98
TLCI

98
CRI

Pioneer 200T Pro

200W tunable LED fresnel zoom

The Pioneer 200 PRO is a tunable white LED fresnel with zoom function. Color temperature 2800K - 6500K. The RDM-DMX compliant, degree motorized zoom along with it's superior CRI make this fixture a good replacement for the traditional fresnels. *Pioneer 200 Pro is both smaller and brighter than Pioneer 200 Zoom.*

Key features:

- 200Watt WW + 200Watt CW constant output
- 25+% brighter than the former Pioneer 200
- 2800K to 6500K tunable white LED
- Average CRI 98, R9≥90, TLCI up to 98
- Soft and even wash effect
- 10 - 55° motorized zoom
- Smooth dimming
- Dimmer frequency 1.2 - 24.0KHz
- DMX, RDM control
- Dimmer modes selectable
- Intelligent fan, silent operation

Application:

- Broadcast, HD studio
- Theatre, church
- Film shooting
- Museum
- Exhibition lighting

Accessories:



Barn door




Gel frame




Photometric

WW(lx)	9480	4170	2560	1640	1250	953	687	555	458
CW(lx)	13900	6570	3300	2160	1790	1350	1120	730	685
Full on(lx)	11700	5540	3840	2020	1490	1230	934	893	603

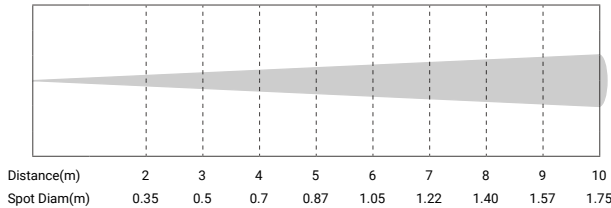

Minimum Spot - 10°


Color Rendition

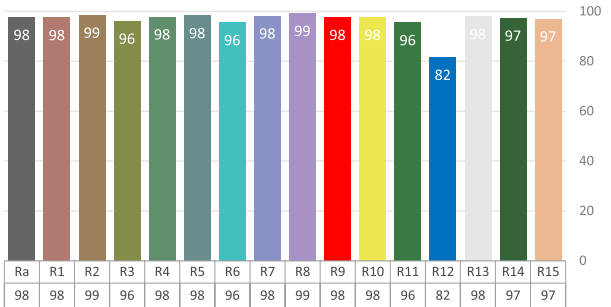


Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	200W WW + 200W CW LED
Color temperature:	2800K - 6500K
Zoom range:	10° - 55° motorized zoom
Color Rendition:	CRI 98, R9≥90, TLCI 98(full on 4000K)
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in&out(5-pin optional)
Control channels:	3/6
Control mode:	DMX, RDM

WW(lx)	1790	879	521	341	276	212	160	134	100
CW(lx)	2590	1280	651	495	386	316	218	177	145
Full on(lx)	2280	1120	757	430	353	254	198	159	127

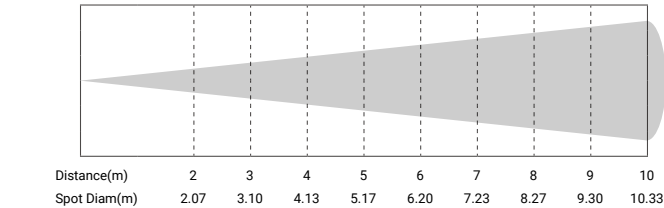

Maximum Spot - 55°

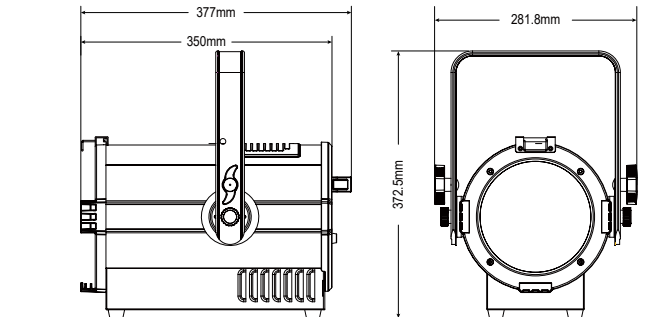

Dimmer speed:	4 grade
Housing:	Colour black, Aluminum
Size:	315 x 296 x 330mm
Package(carton):	445 x 352 x 360mm
N.W.:	8 kg(barn door incl.)
G.W.:	9.8 kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Accessories(opt.):	Clamp
Environment:	IP20

95
CRI

RDM
Control

COB
350W LED

ZOOM

Flicker Free

RGBALC

The Pioneer 200C Zoom is a 200W RGBALC powered LED fresnel with zoom function. The RGBALC infinite color mixing, RDM-DMX compliant, 10 - 55 de-gree motorized zoom along with it’s superior color mixing make this fixture a good replacement for the traditional fresnels.


Key features:

- 200Watt LED
- RGBALC 6 color mixing
- Soft and even wash effect
- High CRI of 95(CT channel)
- 10 - 55° motorized zoom
- Studio mode for super silent operation
- Smooth dimming
- Video flicker free
- DMX, RDM control
- Dimmer modes selectable
- Intelligent temperature control


Application:

- Theatre, chruch
- Film shooting
- Museum
- Stage wash

Accessories:



Barn door



Gel frame


Pioneer 200C Pro

200W RGBALC LED fresnel zoom



Photometric


R(lx)	124	86	59	51	38	33
G(lx)	171	113	84	69	55	44
B(lx)	35	24	17	14	11	9
A(lx)	313	206	155	124	98	79
L(lx)	566	375	281	223	178	144
C(lx)	91	560	45	36	28	24
Full on(lx)	1260	833	625	506	390	320

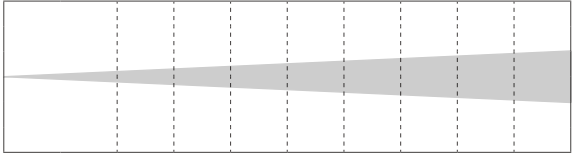

Distance(m)	5	6	7	8	9	10
Spot Diam(m)	0.87	1.05	1.22	1.40	1.57	1.75

Min. Spot - 20°


R(lx)	35	26	19	16	12	11
G(lx)	49	36	29	23	18	14
B(lx)	11	8	7	6	5	4
A(lx)	87	65	51	41	32	25
L(lx)	157	114	92	73	57	45
C(lx)	26	20	16	13	11	8
Full on(lx)	343	254	198	159	121	97

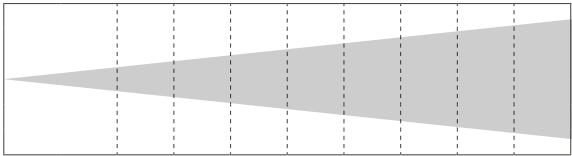

Distance(m)	5	6	7	8	9	10
Spot Diam(m)	5.17	6.20	7.23	8.27	9.30	10.33

Max. Spot - 55°

Color Temperature Channel-CRI

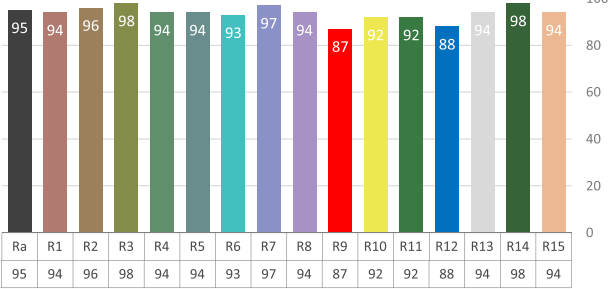

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	200Watt LED
LED color:	RGBA(amber)L(lime)C(cyan)
Color temperature:	2700K - 8000K
Zoom range:	10° - 55° motorized zoom
Color Rendition:	CRI≥95(CT channel), CRI 85(full on avg)
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	2/8/13
Control mode:	Rotary, DMX, RDM, Auto
Dimmer speed:	Standard/ Stage/ TV/ Architecture/ Theatre
Housing:	Colour black, Aluminum
Size:	377 x 282 x 373mm
Package(carton):	540 x 350 x 360mm
N.W.:	8 kg(barn door incl.)
G.W.:	10 kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Accessories(opt.):	Clamp
Compliance:	CE
Environment:	IP20



3200K or 5600K



RDM
Control



COB
300W LED



ZOOM



Flicker Free

98

TLCI

97

CRI

Pioneer 300 Zoom

WW or CW

300W LED fresnel zoom



The Pioneer 300 Zoom is a 300W 3200K or 5600K powered LED fresnel. Features motorized zoom range from 8° - 60°. It's high power light output, high CRI, DMX, RDM, soft wash effect make this fixture a perfect replacement of the traditional 1K fresnels.


Key features:

- 300W COB white LED, 3200K or 5600K optional
- 1KW tungsten equivalent
- CRI 97, R9≥90, TLCI 98, CQS 94
- RDM, DMX control
- 4 dimmer curves selectable
- 8° - 60° motorized zoom
- Smooth dimming
- Flicker free with selectable PWM
- Rotary, key, DMX control of dimmer and zoom
- Silent operation for studio and theater use


Application:

- Broadcast, HD studio
- Theatre, chruch
- Film shooting
- Museum
- Exhibition lighting


Accessories:




Barn door




Gel frame

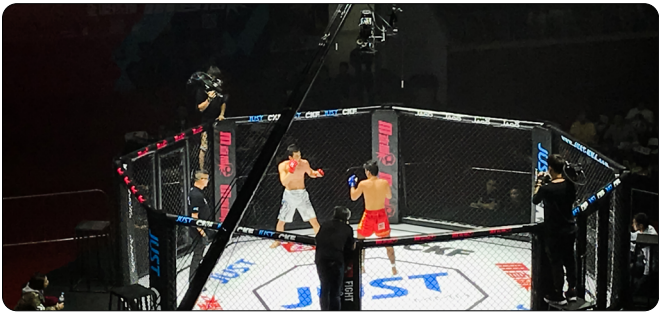

Photometric



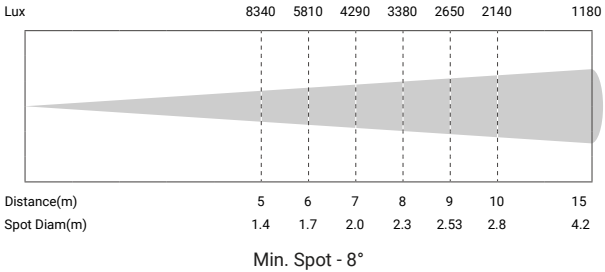


Color Rendition

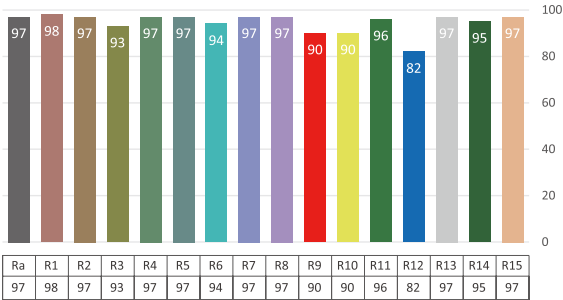

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	300W COB LED
Color temperature:	3200K or 5600K
Zoom range:	8° - 60° motorized zoom
Color Rendition:	CRI 97, R9≥90, TLCI 98, CQS 94
Power connection:	PowerCON in & out
Signal connection:	3-pin & 5-pin XLR in & out
Control channels:	1/2/3/4
Control mode:	Rotary, DMX and RDM
Dimmer curves:	Standard/ Stage/ TV/ Architecture/ Theatre

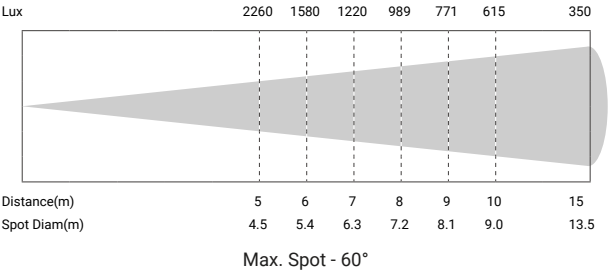

Housing:	Colour black, Aluminum
Size:	460 x 320 x 440mm
Package(carton):	520 x 360 x 345mm
N.W.:	11 kg(barn door incl.)
G.W.:	13 kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Accessories(opt.):	Clamp
Compliance:	CE
Environment:	IP20

98

TLCI

98

CRI

CTC 300 Fresnel

300W + 300W tunable LED fresnel zoom

CTC 300 Fresnel is a 300W warm white + 300Watt cold white powered LED fresnel. Features motorized zoom range from 8° - 60°, color temperature 2800K - 6500K tunable. It's high power light output, high CRI, DMX, RDM control, soft wash effect make this fixture a perfect replacement of the traditional 1K fresnels.


Key features:

- 300W warm + 300W cold white LED
- 2800K - 6500K tunable
- 1KW tungsten equivalent
- Average CRI 98, TLCI 98
- RDM, DMX control
- 4 dimmer curves selectable
- Studio mode for super silent operation
- 8° - 60° motorized zoom
- Smooth dimming
- Flicker free with selectable PWM
- Rotary, key, DMX control of dimmer and zoom


Application:

- Broadcast, HD studio
- Theatre, chruch
- Film shooting
- Museum
- Exhibition lighting

Accessories:



Barn door




Gel frame



Photometric


WW 2800K(lx)	57400	15300	6600	4100	2660	1900	1400	1050	850	700
CW 6500K(lx)	74700	20000	9400	5500	3600	2500	1900	1400	1100	950
Full on 4000k(lx)	74100	20200	9500	5540	3600	2500	1900	1400	1100	950

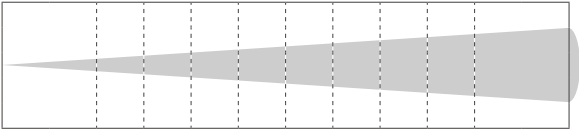

Distance(m)	1	2	3	4	5	6	7	8	9	10
Spot Diam(m)	0.3	0.6	0.8	1.1	1.4	1.7	2.0	2.3	2.53	2.8

Min. Spot


Color Rendition | 4000K

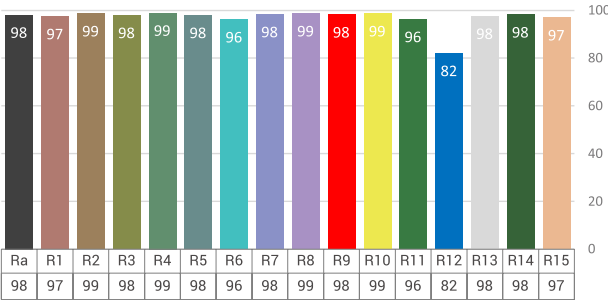

Technical Data



Power supply:	AC100-240V, 50/60Hz
Light source:	300W WW + 300W CW LED
Color temperature:	2800K - 6500K tunable
Zoom range:	8° - 60° motorized zoom
Color Rendition:	CRI 98, R9≥98, TLCI 98
Power connection:	PowerCON in & out
Signal connection:	3-pin & 5-pin XLR in & out
Control channels:	3/6
Control mode:	Rotary, DMX and RDM

WW 2800K(lx)	18000	3900	1850	1100	800	600	480	360	290	255
CW 6500K(lx)	18200	5300	2500	1500	1060	800	630	500	400	340
Full on 4000k(lx)	18500	5300	2540	1550	1080	800	630	500	400	340

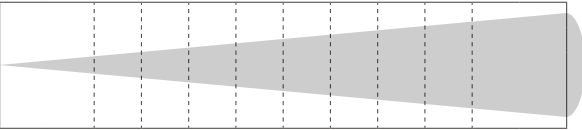

Distance(m)	1	2	3	4	5	6	7	8	9	10
Spot Diam(m)	0.9	1.8	2.7	3.6	4.5	5.4	6.3	7.2	8.1	9.0

Max. Spot



Dimmer curves:	Standard/ Stage/ TV/ Architecture/ Theatre/Studio
Housing:	Colour black, Aluminum
Size:	460 x 320 x 440mm
Package(carton):	520 x 360 x 345mm
N.W.:	11 kg(barn door incl.)
G.W.:	13 kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Accessories(opt.):	Clamp
Environment:	IP20

95
CRI

RDM
Control

COB
350W LED

ZOOM

Flicker Free

RGBALC

The Pioneer 350C Zoom is a 350W RGBALC powered LED fresnel with zoom function. The RDM-DMX compliant, 20 - 55 degree motorized zoom along with it’s superior color mixing make this fixture a good replacement for the traditional fresnels.


Key features:

- 350W LED
- RGBALC six color mixing
- Soft and even wash effect
- High CRI of 95
- 20 - 55° motorized zoom
- Video flicker free
- DMX, RDM control
- 3-pin + 5-pin DMX in & out
- Dimmer modes selectable
- Intelligent temperature control


Application:

- Theatre, chruch
- Film shooting
- Museum
- Stage wash

Accessories:



Barn door



Gel frame




Pioneer 350C Zoom

350W RGBALC color LED fresnel zoom

Photometric


R(lx)	256	187	141	105	92	75
G(lx)	434	334	246	193	155	126
B(lx)	124	97	70	55	45	36
A(lx)	905	676	513	396	326	263
L(lx)	1430	1050	811	633	513	415
C(lx)	278	217	157	124	97	81
Full on(lx)	3220	2420	1800	1400	1120	925

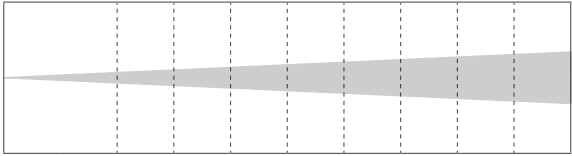

Distance(m)	5	6	7	8	9	10
Spot Diam(m)	1.49	1.79	2.09	3.40	3.83	4.25

Min. Spot - 20°


R(lx)	31	26	21	17	13.5	11
G(lx)	56	43	33	27	21	17
B(lx)	16	12	10	8	6	5
A(lx)	121	94	71	59	47	37
L(lx)	189	142	110	89	73	59
C(lx)	36	28	22	19	14	11
Full on(lx)	412	334	254	202	163	126

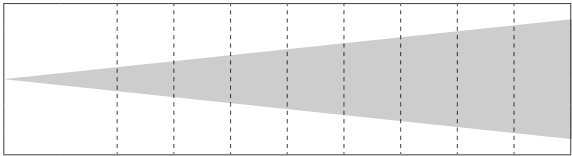

Distance(m)	5	6	7	8	9	10
Spot Diam(m)	6.5	7.8	9.1	10.4	11.7	13

Max. Spot - 55°

Color Temperature Channel-CRI

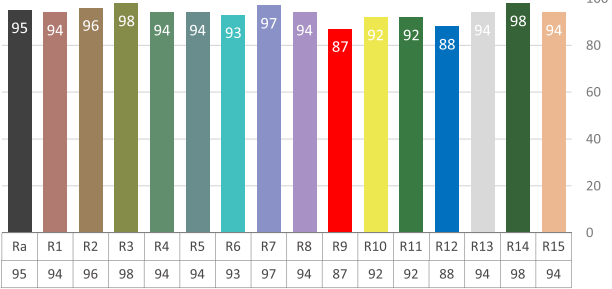

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	350W COB LED
Color temperature:	3000K ~ 8000K
Zoom range:	20° - 55° motorized zoom
Color Rendition:	CRI≥95(CT channel), CRI 85(full on avg)
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out, 5-pin XLR in & out
Control channels:	2/8/13
Control mode:	Rotary, DMX, RDM, Auto
Dimmer mode:	Standard/ Stage/ TV/ Architecture/ Theatre/ Custom
Fan mode:	Studio mode for silent operation
Housing:	Colour black, Aluminum
Size:	460 x 320 x 440mm
Package(carton):	520 x 360 x 345mm
N.W.:	11 kg(barn door incl.)
G.W.:	13 kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Accessories(opt.):	Clamp
Compliance:	CE
Environment:	IP20



DMX
RDM



Flicker Free

98

TLCI

98

CRI



Silent



3200K - 5600K

Solar Panel 150T is a 150Watt tunable white LED studio panel light. It comes with even and wide wash effect, perfect control lighting area through eight leaf barndoor. Moreover, equipped with 150Watt warm white + 150Watt cool white high output LEDs, CRI 98, 98 TLCI brings perfect light quality. It is specially designed for TV studios, video shootings.


Key features:

- 150Watt ww+ 150Watt cw tunable white LED
- 3200K - 5600K tunable
- Super bright, uniform coverage
- Super silent operation for all circumstances
- High CRI 98, TLCI 98
- Trubo mode for high performance output
- Dimmer curves selectable
- Smooth dimming, flicker free operation
- Rotary control of dimmer and color temperature
- Dimmer frequency 1.2 - 20.0 KHz
- 8 - leaf barn door


Application:

- Broadcast, TV studio
- Film shooting
- Video shooting

Accessories:



8 - leaf barn door



Beehive diffuser(opt.)


Solar Panel 150T

150W tunable LED studio panel




Photometric (Turbo mode)

WW - 3200K	4000	1000	540	330	230	160
CW - 5600K	4200	1150	580	360	240	200
Full on -4000K	4700	1300	660	410	280	180

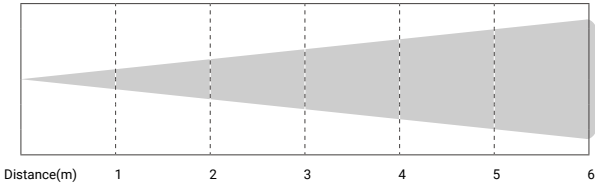


Color Rendition (5600K)

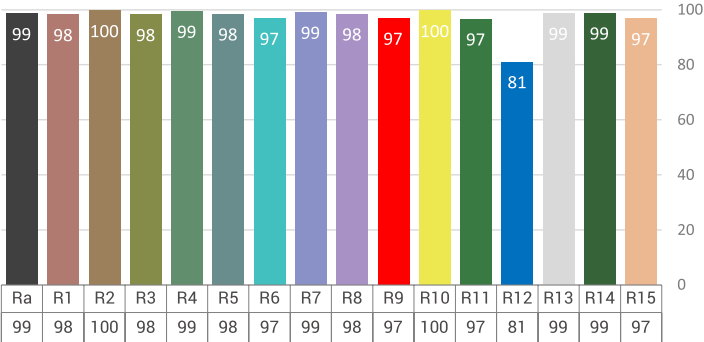


Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Power consumption:	150W max
Light source:	1440 x SMD LEDs
Beam angle:	120°
Color temperature:	3200K - 5600K
Color Rendition:	Avg. CRI 98, TLCI 98, TM-30 Rf 95, TM-30 Rg 101
Power connection:	PowerCON in & out
Signal connection::	3-pin XLR in & out
Control channels:	2/5

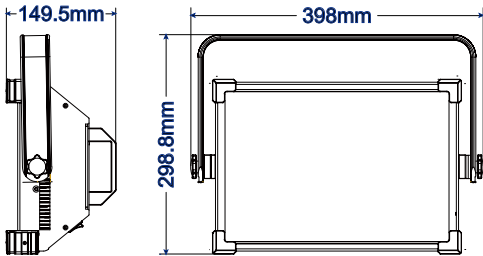

Spectral distribution- 5600K

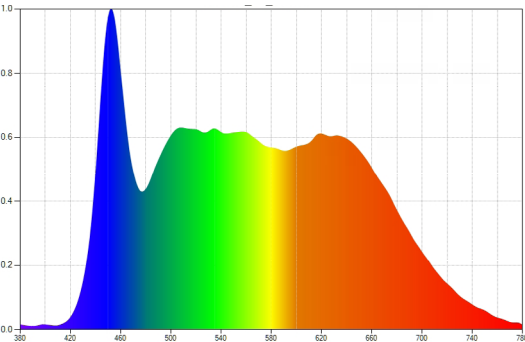

Control mode:	DMX, RDM, Rotary
Dimmer curves:	Standard / Stage / TV / Archi / Theatre/ Studio/ Turbo
Frequency:	1.2 KHz, 1.6 KHz, 2.4 KHz, 4 KHz, 6 KHz, 20 KHz
Housing:	Colour black, Aluminum
Size:	398 x 150 x 299 mm
N.W.:	5.5 kg(barn door incl.)
Accessories(incl.):	Power cable, Barn door, Safety cable
Environment:	IP20

DMX
RDM

Flicker Free

98

TLCI

98

CRI

Silent

3200K - 5600K

Solar Panel 300T is a 300Watt tunable white LED studio panel light. It comes with even and wide wash effect, perfect control lighting area through eight leaf barndoor. Moreover, equipped with 300Watt warm white + 300Watt cool white high output LEDs, CRI 98, 98 TLCI brings perfect light quality. It is specially designed for TV studios, video shootings.


Key features:

- 300Watt + 300Watt tunable white LED
- 3200K - 5600K tunable
- Super bright, uniform coverage
- Super silent operation for all circumstances
- High CRI 98, TLCI 98
- Turbo mode for high performance output
- Dimmer curves selectable
- Smooth dimming, flicker free operation
- Rotary control of dimmer and color temperature
- Dimmer frequency 1.2 - 20.0 KHz
- 8 - leaf barn door


Application:

- Broadcast, TV studio
- Film shooting
- Video shooting

Accessories:



8 - leaf barndoor



Beehive diffuser(opt.)





Solar Panel 300T


300W tunable LED studio panel

Photometric


WW - 3200K	8150	2420	1240	760	520	370
CW - 5600K	8670	2700	1330	830	550	410
Full on -4000K	8770	2600	1330	830	570	420

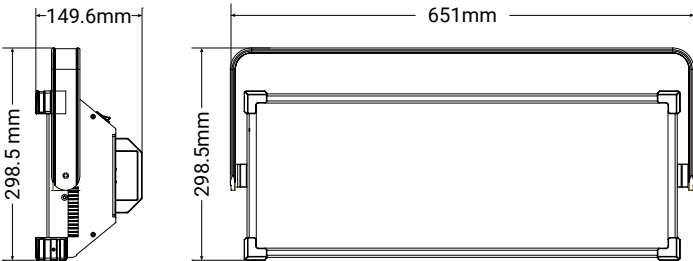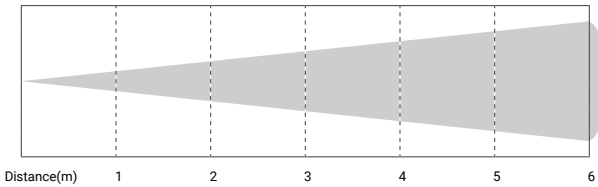

Color Rendition - 5600K

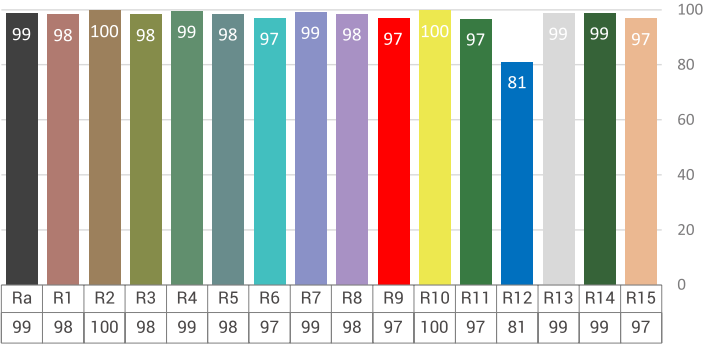

Spectral distribution - 5600K

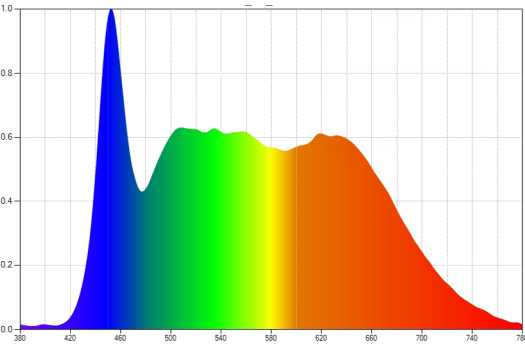

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Power consumption:	300W max
Light source:	2880 x SMD LED
Beam angle:	120°
Color temperature:	3200K - 5600K
Color Rendition:	Avg. CRI 98, TLCI 98, TM-30 Rf 95, TM-30 Rg 101
Power connection:	PowerCON in & out
Signal connection::	3-pin XLR in & out
Control channels:	2/5

Control mode:	DMX, RDM, Rotary
Dimmer curves:	Standard / Stage / TV / Archi / Theatre/ Studio/ Turbo
Frequency:	1.2 KHz, 1.6 KHz, 2.4 KHz, 4 KHz, 6 KHz, 20 KHz
Housing:	Colour black, Aluminum
Size:	651 x 150 x 299mm
N.W.:	9.2 kg(barndoor incl.)
Accessories(incl.):	Power cable, barn door, Safety cable
Accessories(opt.):	Beehive diffuser, Clamp
Environment:	IP20





DMX
RDM



Flicker Free

98

TLCI

95

CRI



Silent



2800K - 8000K

Solar Panel 300C

300W RGBWW LED studio panel

Solar Panel 300C is a 300Watt RGBWW colored LED studio panel light. WW stand for warm white and cold white. With the RGB LEDs, this fixture just come with versatile color mixing, even and wide wash effect, perfect control lighting area through eight leaf barndoor. Moreover, CRI 95, 98 TLCI brings perfect light quality. It is specially designed for theatres, TV studios, video shootings.


Key features:

- RGBW(warm white)W(cold white) LED
- 2800K - 8000K color temperature adjustable
- Even and flat color mixing
- Bright output, uniform coverage
- Super silent operation for all circumstances
- High CRI 95, TLCI 98(avg.)
- Turbo mode for high performance output
- Dimmer curves selectable
- Smooth dimming, flicker free operation
- Rotary control of dimmer
- Dimmer frequency 1.2 - 24.0 KHz
- 8 - leaf barn door


Application:

- Broadcast, TV studio
- Film shooting
- Video shooting


Accessories:



8 - leaf barn door




Beehive diffuser(opt.)





Photometric

Red	372	128	60	39	24	15
Green	563	196	93	54	38	24
Blue	137	46	22	13	9	7
WW	1290	417	209	122	86	55
CW	1360	445	222	129	91	58
Full on	3710	1000	419	349	243	151

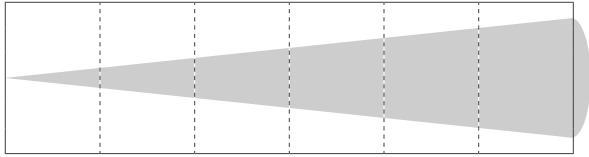

Distance(m) 1 2 3 4 5 6

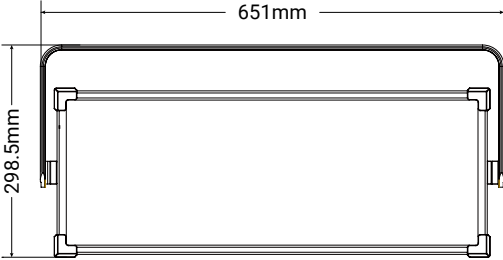

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Power consumption:	200Watt(standard), 300W max.(turbo mode)
Light source:	4320 x SMD LED
Beam angle:	120°
Color temperature:	2800K - 8000K
Color Rendition:	CRI 95, TLCI 98(avg.)
Power connection:	PowerCON in & out
Signal connection::	3-pin XLR in & out
Control channels:	2/7/11

Control mode:	DMX, RDM, Rotary
Dimmer curves:	Standard / Stage / TV / Archi / Theatre/ Studio/ Turbo
Frequency:	1.2 KHz - 24.0 KHz
Housing:	Colour black, Aluminum
Size:	651 x 150 x 299mm
N.W.:	9.2 kg(barn door incl.)
Accessories(incl.):	Power cable, barn door, Safety cable
Accessories(opt.):	Beehive diffuser, Clamp
Environment:	IP20



3200K or 5600K



RDM
Control



Flicker Free



98
TLCI



98
CRI

Solar CYC is a cyclorama fixture with even and wide wash of wall, cyclorama or curtains. Equipped with solar spectrum LEDs, 98 CRI, 93 R9 and 98 TLCI, it is perfectly designed for TV studio, video shooting. First time in the industry, we bring healthy LED illumination concept into theatre and studio lighting field.

Key features:

- 175Watt white LEDs, 3200K/5600K optional
- Super bright, uniform coverage and even lighting
- CRI 98, R9≥93, TLCI 98
- Compatible with DMX and RDM protocols
- Dimmer curves selectable
- Flicker free operation
- LCD display
- Easy to setup
- PWM 1.2 - 20 KHz selectable

Application:

- Broadcast, HD studio
- Theatre
- Stage




Solar CYC

WW or CW


LED cyclorama light





Color Rendition

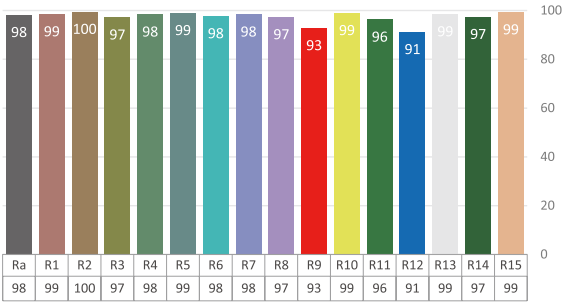

Spectral distribution - 3200K

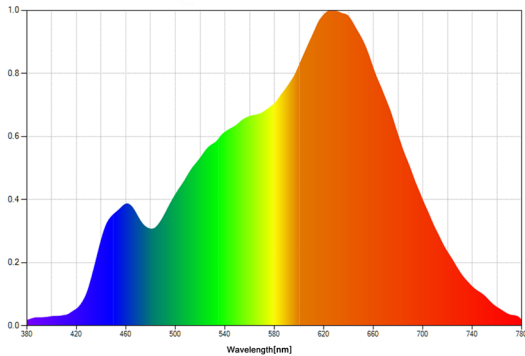

TM-30 3200K

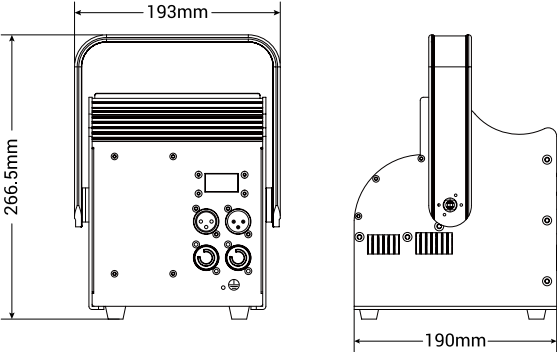

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	175W COB LED
Color temperature:	3200K or 5600K
Color Rendition:	CRI 98, R9≥93, TLCI 98
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	1
Control mode:	DMX, RDM

Dimmer curves:	Standard/ Stage/ TV/ Architecture/ Theatre
Frequency:	1.2 KHz, 1.6 KHz, 2.4 KHz, 4 KHz, 6 KHz, 20 KHz
Housing:	Colour black, Aluminum
Size:	193 x 190 x 266.5mm
N.W.:	2.7 kg
Accessories(incl.):	Power cable
Accessories(opt.):	Safety cable, Clamp
Environment:	IP20



Equiped with high power RGBW LEDs, the CYC RGBW is a cyclorama fixture with even and wide wash of wall, cyclorama or curtains. Various built-in programs, small size body makes it easy to install and use.

Key features:



- 175Watt LEDs
- RGBW color mixing
- Super bright, uniform coverage and even lighting
- Compatible with DMX and RDM protocols
- Various preset programs
- Dimmer curves selectable
- Flicker free operation
- LCD display
- Easy to install and setup
- PWM 1.2 - 20 KHz selectable

Application:

- Theatre
- Stage




CYC RGBW
LED RGBW cyclorama light

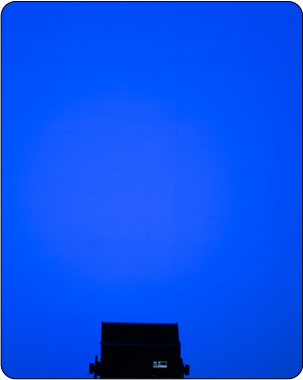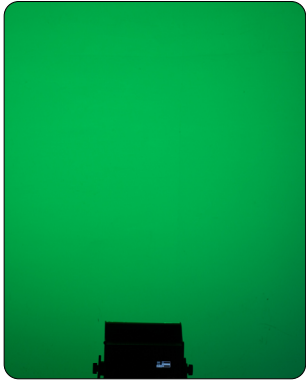

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	175W LED
LED color:	RGBW
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	2/4/6/8
Control mode:	DMX, RDM
Dimmer curves:	Standard/ Stage/ TV/ Architecture/ Theatre
Frequency:	1.2 KHz, 1.6 KHz, 2.4 KHz, 4 KHz, 6 KHz, 20 KHz
Housing:	Colour black, Aluminum
Size:	193 x 190 x 266.5mm
N.W.:	2.7 kg
Accessories(incl.):	Power cable
Accessories(opt.):	Safety cable, Clamp
Environment:	IP20

Dimensions

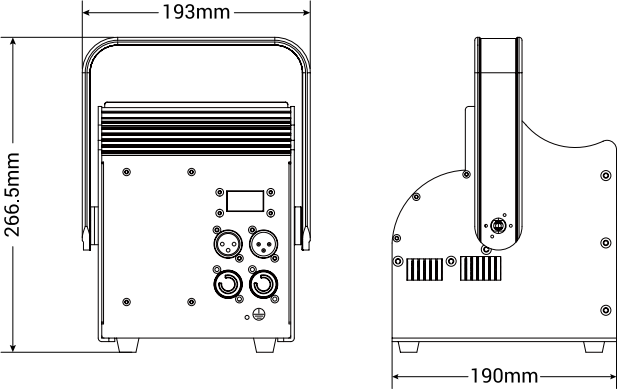



DMX
RDM



Flicker Free

98

TLCI

96

CRI



Fan-free



2700K - 6900K

Atmos 100T

100W tunable LED house light/fresnel

Atmos 100T is a 100Watt WW + 100W CW tunable white LED house light. And A fanless product which you can use it as a down light as well as fresnel light.It comes with fan-free design, and project uniform field of light. Color temperature 2700K - 6900K adjustable at 100 watt constant output. The fixture also brings high CRI , TLCI .

Key features:

- 100Watt + 100Watt tunable white LED
- CCT 2700K - 6900K tunable
- High brightness, uniform coverage
- Fan-free design, silent operation for all circumstances
- High CRI 96, TLCI 98
- Dimmer curves selectable
- Smooth dimming, flicker free operation
- Dimmer frequency 1.20-24.00KHz
- Fixed angle 50°
- Ideal for fixed installation
- Barndoor optional


Application:

- Theatres
- House of worship
- Concert hall




Photometric

WW - 2700K	9190	2400	1770	650	448
CW - 6900K	12900	3230	1480	844	763
Full on - 4000K	16400	3980	1780	1020	660

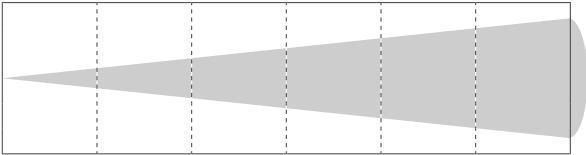

Distance(m) 1 2 3 4 5


Color Rendition - 4000K

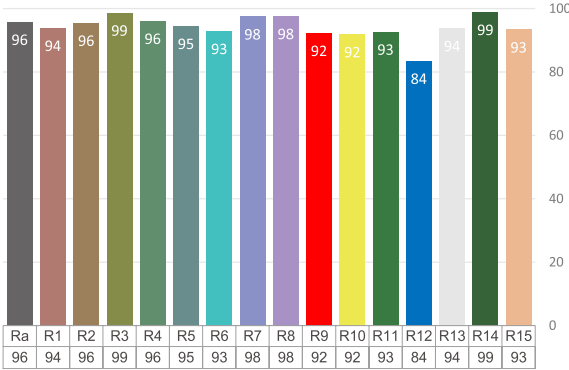

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Power consumption:	100Watt Max.
Light source:	100Watt WW + 100Watt CW LED
Field angle:	50
Color temperature:	2700K - 6900K(±200K)
Color Rendition:	Avg. CRI 96, TLCI 98, TM-30 Rf 94, TM-30 Rg 101
Power connection:	PowerCON in
Signal connection::	3-pin XLR in & out
Control channels:	1/2/3/5

Spectral distribution - 4000K

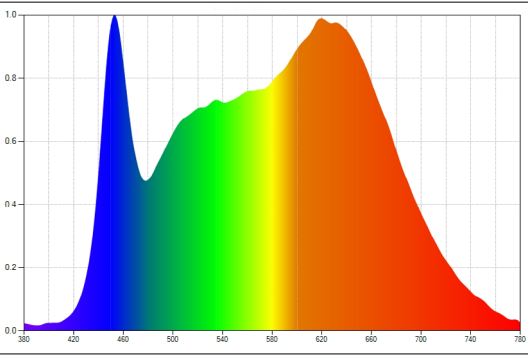

Control mode:	DMX, RDM
Dimmer curves:	Standard / Stage / TV / Archi / Theatre/ Studio/
Frequency:	1.20 - 24.00KHz
Housing:	Colour black, Aluminum
Size:	175 x 220 x 325mm
N.W.:	5.2kg
Accessories(incl.):	Power cable, Safety cable
Accessories(opt.):	Barndoor, Clamp
Environment:	IP20



Atmos 150C

150W LED RGBAL fresnel/downlight

Atmos 150C is a 150W LED RGBAL downlight or fresnel. A fanless product which you can use it as a down light as well as fresnel light. It comes with fan-free design, and project uniform field of light. Smooth dimming, flicker free operation, Dimmer frequency 1.20-24.00KHz adjustable.

Key features:

- 150W RGBAL LED
- High brightness, uniform coverage
- Fresnel or down light in one
- Fan-free design, silent operation for all circumstances
- Dimmer curves selectable
- Smooth dimming, flicker free operation
- Dimmer frequency 1.20-24.00KHz adjustable
- Fixed angle 50°
- Ideal for fixed installation
- Barndoor optional


Application:

- Theatres
- House of worship
- Concert hall



Photometric

R (lx)	1420	399	183	109	71
G (lx)	3080	882	399	237	153
B (lx)	346	94	41	25	16
A (lx)	2460	766	335	200	129
L (lx)	5040	1550	692	406	273
Full on (lx)	11300	3490	155	923	588

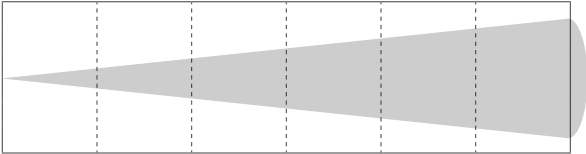

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.32	0.63	0.95	1.25	1.58

50°

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	150W RGBAL LED
Field angle:	50°
Power connection:	PowerCON in
Signal connection:	3-pin XLR in & out(5-pin optional)
DMX channels:	1/7/10/12
Control mode:	DMX, RDM
Housing:	Colour black, aluminum
Size:	175 x 220 x 325mm
N.W.:	5.2kg
Accessories(included):	Power lead, Safety rope
Accessories(optional):	Clamp, barndoor
Environment:	IP20



Power Par 350

WW or CW

The Power par 350 series is powered by 31x10W LED. With warm white, pure white or tunable LEDs selectable. Features extremely high brightness and comact body. It's high power light output,even wash effect make this fixture a perfect replacement of the tradi-tional 575W power par.

Key features:

- 31x10W LED
- WW, CW, tunable white optional
- Super bright
- Long distance throw
- Various LED color selectable
- Video flicker free
- HQ LEDs, long life time
- Die-cast aluminum body
- PowerCon in & out connection

Application:

- Auto exhibition
- Large event
- Stadium
- Shopping mall
- Display lighting

Accessories:




Barn door



Diffusion(opt.)





Photometric

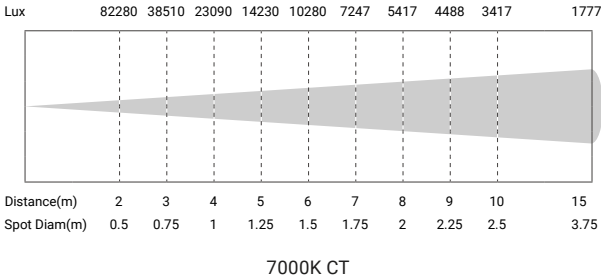



Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	31 x 10W LED
Color temperature:	2700K/7000K/tunable white
Beam angle:	25°
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	2
Control mode:	DMX 512
Housing:	Color black, aluminum

Size

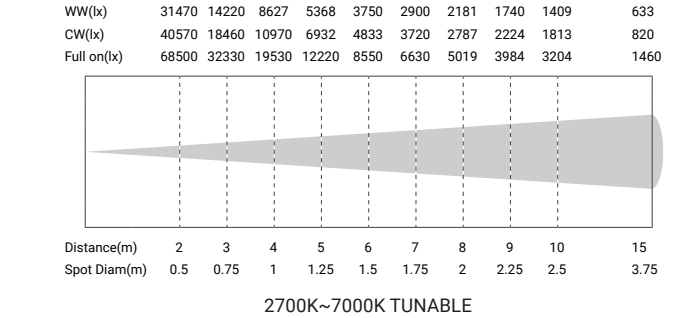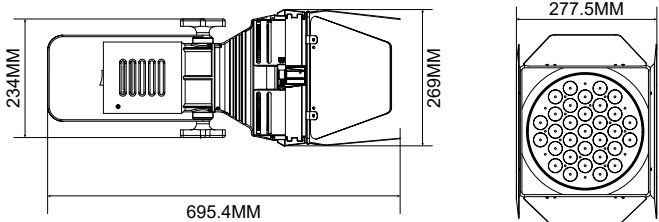

Size:	507 x 269 x 269mm
Package(carton):	320 x 320 x 570mm
N.W.:	7.4 kg(barn door incl.)
G.W.:	10 kg
Accessories(incl.):	Power cable, barn door, safety rope
Accessories(opt.):	Diffusion lens, clamp
Compliance:	CE
Environment:	IP20





Blinder 400

4 eye blinder

Key features:

- 4 x 100W LED, high brightness
- Individual control of each LED
- 3200K ~ 5600K tunable, single white optional
- Smooth dimming, flicker free
- Aluminum housing

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	4 x 100W LED
Color temperature:	3200K ~ 5600K, single white optional
Beam angle:	60°
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out
Control channels:	2/6/12
Control mode:	DMX 512
Housing:	Colour black, Aluminum
Package(carton):	430 x 270 x 420mm
N.W.:	8.5 kg
Accessories:	Power cable
Environment:	IP20



THEATRICAL LIGHTING



Strobe 1000 RGB



200W LED strobe


Key features:

- 200W RGBW LED strobe
- 1000 pcs SMD LED
- Even color mixing, bright
- Strobe, Blinder, Wash all in one
- Aluminum housing
- Segment control

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	1000 x 0.3W SMD LED
Power consum.	230W
Color mixing:	RGB 3in1
Color temperature:	6500K~7500K
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out
Control channels:	8
Control mode:	DMX 512, Sound, Auto
Housing:	Colour black, Aluminum
Size:	540 x 275 x 140mm
Package:	540 x 320 x 205mm
N.W.:	7.5 kg
G.W.:	8 kg
Accessories:	Power cable
Environment:	IP20

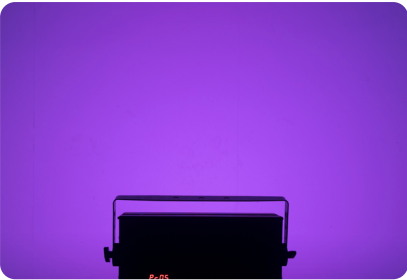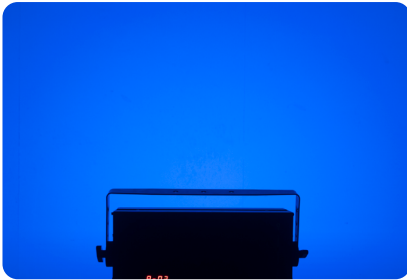



The RDM DMX RC1 is a palm sized RDM/DMX controller. It can monitor and control DMX units compliant with RDM. DMX addresses can be detected and set remotely. It features compact and modern design, battery powered, touch screen and SD card available for storage of chases and scenes.


Key features:

- RDM Compliant
- Monitor and control and RDM devices
- Detect and set DMX address remotely
- SD card for storage chases and scenes and firmware update
- Battery powered, 8-hours' operation
- Charged via 5V 2A Micro-USB charger
- 5 inch capacitive touchscreen

Technical Data

Power supply:	5V via charger at 100-240 V AC, 50/60 Hz
Power connection:	Micro USB
DMX512/RDM:	3-pin and 5-pin XLR in & out
Display:	5" 480x854 IPS capacitive touchscreen
Battery pack type:	Li-ion 3.7V 2000mAh 7.4Wh x 2
Battery life:	8 hrs
Control protocol:	DMX, RDM
Housing:	Colour black, Plastic cover, Steel base
Size:	170 x 113 x 48mm
N.W.:	0.6kg
Environment:	IP20

Size

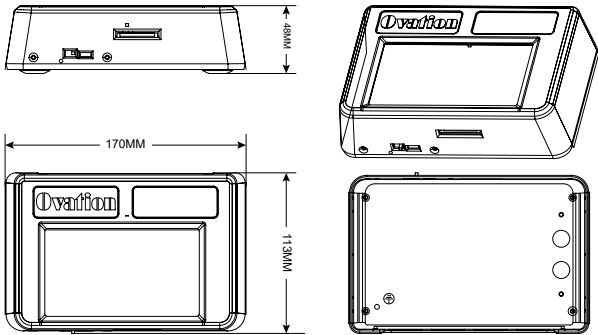

RDM DMX RC1

DMX/RDM controller

RDM DMX SP8

8 way DMX/RDM splitter



Key features:

- RDM Compliant
- Multi-voltage auto-switching power supply
- 2 XLR (3-pin) for DMX input
- 8 optically isolated XLR plugs (3-pin) for DMX output
- LED indication for functions
- 1 x IEC in port
- Rack or truss mount possible



Key features:

- Distributes Art-Net data to 8 DMX512 universes (4096 channels)
- 8 optically isolated XLR plugs (3-pin) for DMX output
- 2 XLR (3-pin) for DMX input
- Variable data routing capabilities for all DMX outputs
- Serial connection possible
- User-friendly configuration directly at the front panel via 4 operating buttons and alphanumeric LCD screen (2 x 16 characters)
- LED indication for functions
- DMX Splitter / DMX booster operation possible

Technical Data

Power supply:	110-240 V AC, 50/60 Hz
Power connection:	PowerCON in & out
Signal inputs:	2 x 3-pin XLR male
Signal outputs:	8 x 3-pin XLR female
Control connection:	RDM, DMX pass-thru
Housing:	Colour black, Steel
Size:	483 x 145 x 44.4mm
N.W.:	1.7 kg
Environment:	IP20

ArtNet DMX AD8

8 way Ethernet-to-DMX splitter



Technical Data

Power supply:	110-240 V AC, 50/60 Hz
Power connection:	PowerCON in
Power consumption:	15W
DMX512 inputs:	2 x 3-pin XLR male
DMX512 outputs	8 x 3-pin XLR female
Ethernet:	2 x RJ45 100 Mbps
Protocol:	Art-Net 4
Housing:	Colour black, Steel
Size:	483 x 169 x 44.4mm
N.W.:	2.9 kg
Environment:	IP20



An ISO 9001:2015 Co.



Our trademarks:

Hotion **Ovation** **iFROG**

Guangzhou Hotion Technology Co., Ltd

1st Floor, Building 29, Meidong Industrial Park,
Huadu District, Guangzhou, China (510880)

T: +86 020-86847336

E: info@hotion.com

www.hotion.com

Manufacture of:

- Studio Lighting
- Professional Lighting
- Entertainment Lighting
- Architectural Lighting



Download latest catalog

Follow us on:



Instagram
@ovationlight



Twitter
@ovationlight



Facebook
@ovationlighting



Youtube

© Copyright by Hotion 08/2025. All rights reserved.
All specifications are subject to change without prior notice

rev25_revC